



内六角沉头螺钉

强度等级8.8/10.9/12.9

代码	类型	螺纹	强度等级	材质		硬度	表面处理	
				国标	相当			
TAU11	内六角沉头螺钉	粗牙	8.8	10B21		—	发黑	
TAU12				镀蓝白锌				
TAU13				镀镍				
TAU14				银灰色达克罗				
TAU01				发黑				
TAU03				镀蓝白锌				
TAU08			镀镍					
TAU15			12.9	40Cr		32~39HRC	银灰色达克罗	
TAU04				35CrMo			37~42HRC	发黑
TAU18				SCM435				发黑

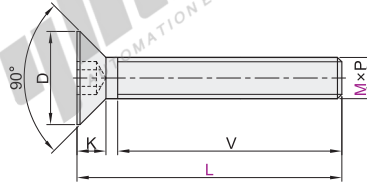

视角标准：第一视角

TAU18适用标准:GB/T 70.3-2000
适用标准:DIN 7991-1986

强度等级8.8

型号		L	V	P 螺距	D		K (max)	S	
代码	M				min	max		min	max
(10B21)	3	4 5 6 8 10 12 14 16 18 20	全牙	0.5	5.7	6	1.7	2.02	2.1
	4	5 6 8 10 12 14 16 18 20		0.7	7.64	8	2.3	2.52	2.6
	5	6 8 10 12 14 16 18 20 25		0.8	9.64	10	2.8	3.02	3.1
	6	8 10 12 14 16 18 20 25 30		1	11.57	12	3.3	4.02	4.1
	8	10 12 14 16 18 20 25 30		1.25	15.57	16	4.4	5.02	5.14
	10	12 14 16 18 20 25 30		1.5	19.48	20	5.5	6.02	6.14
TAU14	12	16 18 20 25 30	1.75	23.48	24	6.5	8.025	8.175	

强度等级10.9

型号		L	V	P 螺距	D		K (max)	S	
代码	M				(min)	(max)		(min)	(max)
(SCM435)	2	3 4 5 6 8 10 12 14 16 20	全牙	0.4	3.7	4	1.3	1.32	1.36
	2.5	4 12 16 20 25 30		0.45	4.7	5	1.5	1.52	1.56
	3	6 8 10 12 16 20 25 30 35 40 45 50		0.5	5.7	6	1.7	2.02	2.1
	4	6 8 10 12 16 20 25 30 35 40 45 50		0.7	7.64	8	2.3	2.52	2.6
	5	6 8 10 12 14 16 20 25 30 35 40 45 50		0.8	9.64	10	2.8	3.02	3.1
	6	6 8 10 12 16 20 25 30 35 40 45 50 55 60		1	11.57	12	3.3	4.02	4.1
	8	10 12 16 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 100		1.25	15.57	16	4.4	5.02	5.14
	10	16 20 25 30 35 40 45 50 55 60 65 70 75 80 90 100		1.5	19.48	20	5.5	6.02	6.14
	12	20 25 30 35 40 45 50 55 60 65 70 75 80 90 100		1.75	23.48	24	6.5	8.025	8.175
	16	30 35 40 45 50 55 60 65 70 75 80 90 100		2	29.48	30	7.5	10.025	10.175
TAU01	20	40 45 50 55 60 65 70 75 80 90 100	2.5	35.38	36	8.5	12.032	12.212	
10B21 (镀蓝白锌)	3	6 8 10 12 16 20 25 30	全牙	0.5	5.7	6	1.7	2.02	2.1
	4	6 8 10 12 16 20 25 30 35		0.7	7.64	8	2.3	2.52	2.6
	5	8 10 12 16 20 25 30 35 40		0.8	9.64	10	2.8	3.02	3.1
	6	8 10 12 16 20 25 30 35 40 45		1	11.57	12	3.3	4.02	4.1
	8	10 12 16 20 25 30 35 40 45 50 60		1.25	15.57	16	4.4	5.02	5.14
TAU03	10	16 20 25 30 35 40 45 50 55 60 65 70	1.5	19.48	20	5.5	6.02	6.14	
10B21 (镀镍)	2	3 4 5 6 8 10 16	全牙	0.4	3.7	4	1.3	1.32	1.36
	2.5	5 6 8 10 16 20		0.45	4.7	5	1.5	1.52	1.56
	3	5 6 8 10 12 16 20 25 30 35 40 45		0.5	5.7	6	1.7	2.02	2.1
	4	6 8 10 12 16 20 25 30 35 40 45 50		0.7	7.64	8	2.3	2.52	2.6
	5	6 8 10 12 14 16 20 25 30 35 40 45 50		0.8	9.64	10	2.8	3.02	3.1
	6	8 10 12 14 16 20 25 30 35 40 45 50 55 60		1	11.57	12	3.3	4.02	4.1
	8	10 12 14 16 20 25 30 35 40 45 50 55 60 70 80 100		1.25	15.57	16	4.4	5.02	5.14
	10	16 20 25 30 35 40 45 50 55 60 65 70 80 90 100		1.5	19.48	20	5.5	6.02	6.14
	12	20 25 30 35 40 45 50 55 60 65 70 75 80 90 100		1.75	23.48	24	6.5	8.025	8.175
	TAU08	16		25 30 35 40 45 50 55 60 65 70 75 80 90 100	2	29.48	30	7.5	10.025

强度等级10.9/12.9

型号		L	V	P 螺距	D		K (max)	S	
代码	M				min	max		min	max
(40Cr)	3	4 5 6 8 10 12 14 16 18 20	全牙	0.5	5.7	6	1.7	2.02	2.1
	4	5 6 8 10 12 14 16 18 20		0.7	7.64	8	2.3	2.52	2.6
	5	6 8 10 12 14 16 18 20 25		0.8	9.64	10	2.8	3.02	3.1
	6	8 10 12 14 16 18 20 25 30		1	11.57	12	3.3	4.02	4.1
	8	10 12 14 16 18 20 25 30		1.25	15.57	16	4.4	5.02	5.14
	TAU45	10		12 14 16 18 20 25 30	1.5	19.48	20	5.5	6.02
(SCM435)	12	16 18 20 25 30	全牙	1.75	23.48	24	6.5	8.025	8.175
	3	5 6 8 10 12 14 16 20 25 30		0.5	5.7	6	1.7	2.02	2.1
	4	6 8 10 12 14 16 20 25 30		0.7	7.64	8	2.3	2.52	2.6
	5	6 8 10 12 14 16 20 25 30 35 40 45 50		0.8	9.64	10	2.8	3.02	3.1
	6	8 10 12 14 16 20 25 30 35 40 45 50		1	11.57	12	3.3	4.02	4.1
	TAU18	8		10 12 16 20 25 30 35 40 45 50	1.25	15.57	16	4.4	5.02
	10	12 16 20 25 30 35 40 45 50	1.5	19.48	20	5.5	6.02	6.14	
	12	16 20 25 30 35 40 45 50	1.75	23.48	24	6.5	8.025	8.175	



请按图示订货

型号		L
代码	M	
(TAU11)	3	4 5 6 8 10 12
	4	5 6 8 10 12 14
	5	6 8 10 12 14 16

TAU11—M3—L4



未税价(元)

● 优惠价
数量 1~49 50~
价格 100% 另行报价



交货期

7