



代码	类型	材质		表面处理
		国标	相当	
EOM41	内六角螺钉型	45	S45C	发黑
EOM42		0Cr18Ni9	SUS304	无电解镀锌
EOM43				

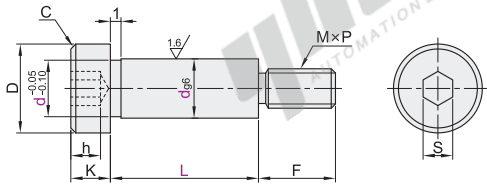

EX Example 使用示例



视角标准：第一视角

型号		L										D	h	K	F	M	P	C	S	适用惰轮									
代码	d _{g6}	3	4	5	6	8	10	12	16	20	25	30	32	36	38	40	螺距	0.5	1	2	2.5	3	4	5	6	8			
(S45C)	3	-0.002 -0.008	4 6 8 10 12										5.5	1.3	2		4	M2.5	0.45			2							
EOM41	4	-0.004 -0.012	6 8 10 12 16										6.5	1.5	2.8		4	M2.5	0.45			2.5							
EOM42	5	-0.004 -0.012	6 8 10 12 16 20 25 30 32 36 38 40										8	1.7	3.5		6	M3	0.5	0.5		3							
EOM42	6	-0.004 -0.012	8 10 12 16 20 25 30 32 36 38 40										9	2.5	4		8	M4	0.7			4							
(SUS304)	8	-0.005 -0.014	10 12 16 20 25 30 32 36 38 40										11	3	5		10	M6	1.0			5							
EOM43	10	-0.005 -0.014	20 25 30 32 36 38 40										14	4	6		12	M8	1.25	1		6							
EOM43	12	-0.006 -0.017	20 25 30 32 36 38 40										16	5	7		12	M8	1.25			8							



型号		L														
代码	d	3	4	5	6	8	10	12	16	20	25	30	32	36	38	40
EOM41	3	4 6 8 10 12														
EOM42	4	6 8 10 12 16														

EOM41-d3-L4



优惠价	
数量	1~20 21~
价格	100% 另行报价

交货期	
数量	7