

精密级导套

肩型/直柱型



肩型

代码	类型	油槽	材质	硬度
OGL41	肩型	有	SUJ2	58HRC~
OGL42	肩型	无	SUJ2	58HRC~

① 带油槽导套与无油槽导柱/支撑柱 (OGL01/02/16/31) 搭配使用。

② 无油槽导套与带油槽导柱/支撑柱 (OGL04/05/15/34) 搭配使用。

③ 精密级导柱与精密级支撑柱和精密级导套之间配合间隙较小，请在模具温度80℃以下使用。

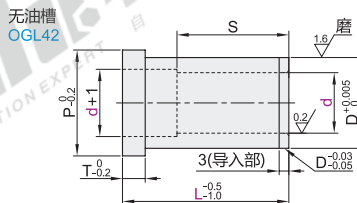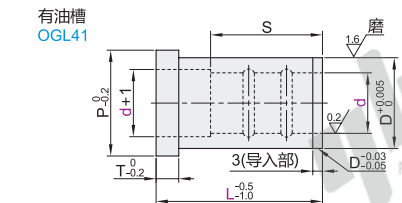

视角标准：第一视角

有油槽

代码	型号	d	L	T	D	P	S	L15	L20	L25	L30	L35	L40	L45	L50	L60	L70	L80	L90	L100	L110	L120
OGL41	8	0	15 20 25	5	12	14	15	15	—	—	—	—	—	—	—	—	—	—	—	—	—	—
	10	-0.005	15 20 25 30 35 40		14	16	15	20	20	20	20	20	20	—	—	—	—	—	—	—	—	—
	12	-0.005	15 20 25 30 35 40 45 50		18	22	20	25	25	25	25	25	25	25	25	—	—	—	—	—	—	—
	13	-0.010	15 20 25 30 35 40 45 50		20	25	20	25	25	25	25	25	25	25	25	—	—	—	—	—	—	—
	16	-0.010	20 25 30 35 40 45 50 60	6	25	30	25	30	25	30	30	30	30	30	30	30	—	—	—	—	—	—
	20	-0.010	20 25 30 35 40 45 50 60 70		30	35	30	35	30	35	30	35	30	35	30	35	—	—	—	—	—	—
	25	-0.015	25 30 35 40 45 50 60 70 80	8	35	40	—	—	—	—	—	—	—	—	—	50	50	50	—	—	—	—
	28	-0.015	50 60 80		40	45	—	—	—	—	—	—	—	—	—	56	56	56	—	—	—	—
	30	-0.015	25 30 35 40 45 50 60 70 80 90 100		42	47	—	25	30	—	35	40	50	50	60	60	60	60	60	60	60	60
	35	-0.015	35 40 50 60 70 80 90 100 110 120		48	54	—	—	—	—	—	—	—	—	60	70	70	70	70	70	70	70
	40	-0.020	50 60 70 80 90 100 110 120	10	55	60	—	—	—	—	—	—	—	—	—	70	80	80	80	80	80	80

无油槽

代码	型号	d	L	T	D	P	S	L15	L20	L25	L30	L35	L40	L45	L50	L60
OGL42	8	0	15 20 25	5	12	14	15	15	—	—	—	—	—	—	—	—
	10	-0.005	15 20 25 30 35 40		14	16	20	20	20	20	20	20	—	—	—	—
	12	-0.005	15 20 25 30 35 40 45 50		18	22	20	25	25	25	25	25	—	—	—	—
	13	-0.010	15 20 25 30 35 40 45 50	6	20	25	20	25	25	25	25	25	—	—	—	—
	16	-0.010	15 20 25 30 35 40 45 50 60		25	30	25	30	30	30	30	30	—	—	—	—
	20	-0.015	15 20 25 30 35 40 45 50 60	8	30	35	30	35	30	35	30	35	—	—	—	—
	25	-0.015	25 30 35 40 45 50 60	8	35	40	—	—	—	—	—	—	40	45	50	50



请按图订货



未税价(元)

代码	型号	d	L
OGL42	8	15 20 25	30 35 40

OGL42—d8—L15



未税价(元)

数量	1~9	10~
价格	100%	另行报价

交货期	12
-----	----



直柱型

代码	类型	油槽	材质	硬度
OGL43	直柱型	有	SUJ2	58HRC~
OGL44	直柱型	无	SUJ2	58HRC~

① 带油槽导套与无油槽导柱/支撑柱 (OGL01/02/16/31) 搭配使用。

② 无油槽导套与带油槽导柱/支撑柱 (OGL04/05/15/34) 搭配使用。

③ 精密级导柱与精密级支撑柱和精密级导套之间配合间隙较小，请在模具温度80℃以下使用。

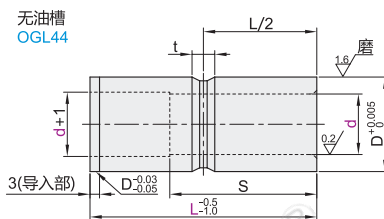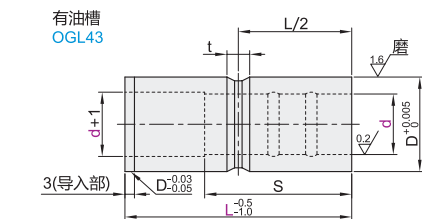

视角标准：第一视角

有油槽

代码	型号	d	L	D	t	S	L10	L15	L20	L25	L30	L35	L40	L45	L50	L60	L70	L80	L90	L100
OGL43	8	0	10 15 20 25	12	6	10	15	15	—	—	—	—	—	—	—	—	—	—	—	—
	10	-0.005	10 15 20 25 30 35 40				20	20	20	20	20	20	20	—	—	—	—	—	—	—
	12	-0.005	10 15 20 25 30 35 40				20	25	25	25	25	25	25	—	—	—	—	—	—	—
	13	-0.005	10 15 20 25 30 35 40				20	25	25	25	25	25	25	—	—	—	—	—	—	—
	16	-0.010	10 15 20 25 30 35 40 50	25	8	10	25	30	30	30	30	30	30	—	—	—	—	—	—	—
	20	-0.010	10 15 20 25 30 35 40 50 60 70				30	35	30	35	30	35	30	35	—	—	—	—	—	—
	25	-0.015	20 25 30 35 40 50 60 70	35	8	10	—	—	—	—	—	—	—	—	—	—	—	—	—	—
	28	-0.015	40				—	—	—	—	—	—	—	—	—	—	—	—	—	—
	30	-0.015	25 30 35 40 50 60 70 80				—	—	—	—	—	—	—	—	—	—	—	—	—	—
	35	-0.015	25 30 35 40 50 60 70 80 90 100				—	—	—	—	—	—	—	—	—	—	—	—	—	—
	40	-0.020	45 50 60 70 80 90 100	55	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

无油槽

代码	型号	d	L	D	t	S	L10	L15	L20	L25	L30	L35	L40	L45	L50	L60
OGL44	8	0	10 15 20 25	12	4	10	15	15	—	—	—	—	—	—	—	—
	10	-0.005	10 15 20 25 30 35 40				20	20	20	20	20	20	20	—	—	—
	12	-0.005	10 15 20 25 30 35 40 45 50				20	25	25	25	25	25	25	—	—	—
	13	-0.010	10 15 20 25 30 35 40 45 50	20	5	10	20	25	25	25	25	25	25	—	—	—
	16	-0.010	10 15 20 25 30 35 40 45 50 60				20	25	25	25	25	25	25	—	—	—
	20	-0.015	10 15 20 25 30 35 40 45 50 60	30	6	10	30	35	30	35	30	35	30	35	—	—
	25	-0.015	20 25 30 35 40 45 50 60				30	35	30	35	30	35	30	35	—	—



请按图订货



未税价(元)

代码	型号	d	L
OGL44	8	10 15 20 25	30 35 40

OGL44—d8—L10



未税价(元)

数量	1~9	10~
价格	100%	另行报价

交货期	12
-----	----