


代码	类型	材质			表面处理	
		外罩	螺杆	底座	外罩	螺杆
WAK21	金属+橡胶底座型	S45C		NBR	镀锌	
WAK22					镀锌	
WAK26		SUS304			电解研磨	



型号		M	L	螺距	S	H	T	V	V ₁	承载(Kg)	参考重量 (Kg/pcs)		
代码	D												
WAK21 WAK22 WAK26	45	8	50	1.25	13	15	6	6	6.5	390	0.05		
			100								0.07		
		10	75	100	1.5	17		7	8	430	0.09		
												0.10	
	70	12	75	100	1.75	19	23	7	8	10	490	0.18	
													0.20
												125	0.21
												150	0.23
			75	100								0.30	
													0.33
												100	0.37
												125	0.40
	80		200				25	8				0.44	
													0.15
	20		125		2.5	30			13	16	680	0.17	
													0.19
			200									0.22	

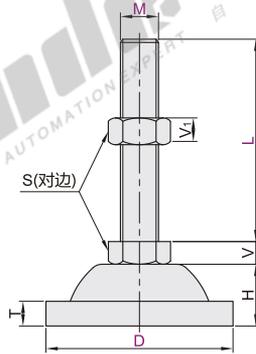

型号		M	L
代码	D		
WAK21	70	12	75
WAK26	70	12	100

WAK21—D70—M12—L75

可选加工

型号		M	L	可选加工代码
代码	D			
WAK21	70	12	75	WS WL BS
WAK26	70	12	100	

WAK21—D70—M12—L75—WS



优惠价	
数量	价格
1~9	100%
10~	另行报价

交货期	
数量	交货期
1~9	1
10~	

防滑脚杯

可选加工



代码	技术说明																																	
WS	螺杆末端加工外四角 	选型方法 WS <table border="1"> <thead> <tr> <th>M</th> <th>n</th> <th>e</th> </tr> </thead> <tbody> <tr><td>10</td><td>6</td><td></td></tr> <tr><td>12</td><td>8</td><td>10</td></tr> <tr><td>14</td><td>10</td><td>12</td></tr> <tr><td>16</td><td>12</td><td>13.5</td></tr> <tr><td>20</td><td>14</td><td>15</td></tr> <tr><td>24</td><td>18</td><td>22</td></tr> </tbody> </table>	M	n	e	10	6		12	8	10	14	10	12	16	12	13.5	20	14	15	24	18	22											
		M	n	e																														
10	6																																	
12	8	10																																
14	10	12																																
16	12	13.5																																
20	14	15																																
24	18	22																																
WL	螺杆末端加工外六角 	选型方法 WL <table border="1"> <thead> <tr> <th>M</th> <th>n1</th> <th>e1</th> </tr> </thead> <tbody> <tr><td>10</td><td>6</td><td></td></tr> <tr><td>12</td><td>8</td><td>10</td></tr> <tr><td>14</td><td>9</td><td>10</td></tr> <tr><td>16</td><td>10</td><td></td></tr> <tr><td>20</td><td>13</td><td>14</td></tr> <tr><td>24</td><td>16</td><td>18</td></tr> <tr><td>30</td><td>20</td><td>21</td></tr> </tbody> </table>	M	n1	e1	10	6		12	8	10	14	9	10	16	10		20	13	14	24	16	18	30	20	21								
		M	n1	e1																														
10	6																																	
12	8	10																																
14	9	10																																
16	10																																	
20	13	14																																
24	16	18																																
30	20	21																																
BS	螺杆末端加工扳手槽 	选型方法 BS <table border="1"> <thead> <tr> <th>M</th> <th>n2</th> <th>ee</th> <th>e2</th> </tr> </thead> <tbody> <tr><td>10</td><td>8</td><td>8</td><td></td></tr> <tr><td>12</td><td>10</td><td></td><td></td></tr> <tr><td>14</td><td>12</td><td>10</td><td>12</td></tr> <tr><td>16</td><td>13</td><td></td><td></td></tr> <tr><td>20</td><td>17</td><td></td><td></td></tr> <tr><td>24</td><td>20</td><td>15</td><td>18</td></tr> <tr><td>30</td><td>26</td><td></td><td></td></tr> </tbody> </table>	M	n2	ee	e2	10	8	8		12	10			14	12	10	12	16	13			20	17			24	20	15	18	30	26		
		M	n2	ee	e2																													
10	8	8																																
12	10																																	
14	12	10	12																															
16	13																																	
20	17																																	
24	20	15	18																															
30	26																																	

代码	技术说明																						
NS	螺杆末端加工内四角 	选型方法 NS <table border="1"> <thead> <tr> <th>M</th> <th>n3</th> <th>e3</th> </tr> </thead> <tbody> <tr><td>10</td><td>5</td><td></td></tr> <tr><td>12</td><td>6</td><td>10</td></tr> <tr><td>14</td><td>8</td><td>12</td></tr> <tr><td>16</td><td>10</td><td>13.5</td></tr> <tr><td>20</td><td>14</td><td>15</td></tr> <tr><td>24</td><td>18</td><td>20</td></tr> </tbody> </table>	M	n3	e3	10	5		12	6	10	14	8	12	16	10	13.5	20	14	15	24	18	20
		M	n3	e3																			
10	5																						
12	6	10																					
14	8	12																					
16	10	13.5																					
20	14	15																					
24	18	20																					
NL	螺杆末端加工内六角 	选型方法 NL <table border="1"> <thead> <tr> <th>M</th> <th>n4</th> <th>e4</th> </tr> </thead> <tbody> <tr><td>10</td><td>4</td><td>5</td></tr> <tr><td>12</td><td>6</td><td>8</td></tr> <tr><td>14</td><td>8</td><td>10</td></tr> <tr><td>16</td><td>10</td><td>12</td></tr> <tr><td>20</td><td>12</td><td>15</td></tr> <tr><td>24</td><td>16</td><td>18</td></tr> </tbody> </table>	M	n4	e4	10	4	5	12	6	8	14	8	10	16	10	12	20	12	15	24	16	18
		M	n4	e4																			
10	4	5																					
12	6	8																					
14	8	10																					
16	10	12																					
20	12	15																					
24	16	18																					
MS	铆死底座与螺杆 	选型方法 MS <p>① 底座与螺杆铆死，可以提高底座和螺杆的连接刚度，但是底座与螺杆无法相对转动；</p> <p>② 铆死后调节是底座也会随螺杆一起转动。</p> <p>③ 不适用于万向类型、橡胶底座型和非铆接组装的脚杯。</p>																					

- ① 请根据脚杯螺杆尺寸M进行加工参数的选择；
- ② 加工部不带镀层，有防锈漆；
- ③ 工具可根据不同加工类型进行选择，可选用开口扳手、活动扳手、内四角扳手、内六角扳手等。

