


螺纹圆形连接器

后螺母插座 防水型

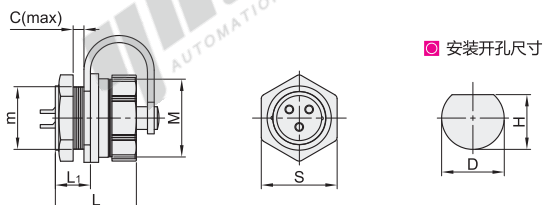

视角标准：第一视角

型号		规格	芯数	端头	m	M	C	L ₁	L	S	D	H	适配插头 代码
代码	外壳形状												
ZIX66	ZM (后螺母插座)		2										ZIX48
			3										
			4										
		16	5		M16×1	M18×1		9.7	22	21.2	15.7	15.3	
			7										
			9										
			10										
			2										
			3										
			4										
		20	5		M20×1	M22×1		9.9		25.5	19.7	19.3	
			6	J(插针)									
			7	K(插孔)			5						
			9										
			12										
			10										
		24	12		M24×1	M26×1		10	23	29.2	23.9	23.2	
			19										
			7										
			12										
			16										
		28	17		M28×1	M30×1		10.2		33.3	27.7	26.9	
			20										
			24										
			26										

❗ 插针头必须和插孔头配合使用。



请按图示订货

型号		规格	芯数	端头
代码	外壳形状			
ZIX66	ZM	16	4	J(插针)
			5	K(插孔)

ZIX66—ZM—16—4—J

性能表

连接方式	螺纹连接
接线方式	焊接
接插次数	500次
温度范围	-40℃~+85℃
防护等级	IP67