

ISO标准矩形弹簧



◀ 超重载荷弹簧(黄色)

代码	类型	材质	最大压缩量
YSIB	超重载型	SWOSC-V	L×25%

□ L尺寸公差

L	公差
89以下	±1
102以上	±1%

- ① 载荷(±10%)
- ① 直角度(3°以下)
- ① 负载(N)=弹簧常数(N/mm)×压缩量
- ① 理论使用次数: 30万次(L×17%为100万次)
- ① 弹簧颜色和圈数可能会因生产批次不同而异, 但产品性能均符合标准, 不影响使用!
- ① 参考标准 ISO 10243-2019
- ① 弹簧外径公差: -0.1 , 外径公差: $+2.0$

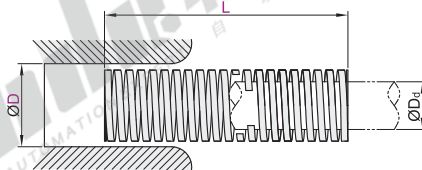

视角标准: 第一视角

型号			轴径 Dd	弹簧常数 N/mm	使用方法 30万次 F=L×25%	
代码	孔径D	长度L			Fmm	负载N
10	-0.48 -1.18	25	5	+0.7 0	36.8	6.2 228.2
		32			27.9	8 223.2
		38			23.7	9.5 225.2
		44			19.2	11 211.2
		51			16.5	12.7 209.6
		64			13.2	16 211.2
	0 -0.7	76			10.9	19 207.1
		305			2.6	76.3 198.4
		25			58.5	6.2 362.7
		32			43.9	8 351.2
		38			36	9.5 342
		44			30.3	11 333.3
12.5	0 -0.7	51	6.3	+1.53 +0.83	26.2	12.7 332.7
		64			21.2	16 339.2
		76			17.1	19 324.9
		89			14.5	22.2 321.9
		305			4.3	76.3 328.1
		25			118	6.2 731.6
16	-0.12 -0.82	32	8	+1.43 +0.73	89	8 712
		38			72.1	9.5 685
		44			60.9	11 669.9
		51			52.3	12.7 664.2
		64			41.2	16 659.2
		76			34.1	19 647.9
	-0.95 -1.65	89	10	+0.7 0	29.5	22.2 654.9
		102			25.6	25.5 652.8
		305			8.4	76.3 640.9
		25			293	6.2 1817
		32			224	8 1792
		38			177	9.5 1682
20	-0.95 -1.65	44	12.5	+1.2 +0.2	149	11 1639
		51			128	12.7 1626
		64			99	16 1584
		76			81.7	19 1552
		89			69.5	22.2 1543
		102			60.6	25.5 1545
	-0.5 -1.2	115	15	+1.0 +0.5	53	28.7 1521
		127			47.5	31.7 1506
		139			43	34.7 1492
		152			39	38 1482
		305			20	76.3 1526
		32			374	8 2992
25	-0.5 -1.2	38	17.5	+1.0 +0.5	300	9.5 2850
		44			244	11 2684
		51			208	12.7 2642
		64			161	16 2576
		76			131	19 2489
		89			111	22.2 2464

型号			轴径 Dd	弹簧常数 N/mm	使用方法 30万次 F=L×25%	
代码	孔径D	长度L			Fmm	负载N
25	-0.5 -1.2	102	12.5	+1.2 +0.2	96.3	25.5 2456
		115			85.7	28.7 2460
		127			76.3	31.7 2419
		139			66	34.7 2290
		152			63.5	38 2413
		178			53.9	44.5 2399
	-0.5 -1.5	203	16	+1.5 +0.5	47	50.7 2383
		305			30.9	76.3 2358
		38			480	9.5 4560
		44			390	11 4290
		51			336	12.7 4267
		64			269	16 4304
32	-0.5 -1.5	76	18	+1.0 +0.5	219	19 4161
		89			180	22.2 3996
		102			155	25.5 3953
		115			140	28.7 4018
		127			124	31.7 3931
		139			112	34.7 3886
	-0.9 -2.9	152	20	+1.5 +0.5	102	38 3876
		178			88.2	44.5 3925
		203			76	50.7 3853
		254			60.8	64 3891
		305			49	76.3 3739
		51			628	12.7 7976
40	-0.9 -2.9	64	22.5	+1.0 +0.5	487	16 7792
		76			379	19 7201
		89			321	22.2 7126
		102			281	25.5 7166
		115			245	28.7 7032
		127			221	31.7 7006
	-1.0 -2.5	139	25	+2.0 +1.0	185	34.7 6420
		152			168	38 6384
		178			150	44.5 6675
		203			132	50.7 6692
		254			107	64 6848
		305			87.8	76.6 6725
50	-1.0 -2.5	64	27.5	+1.0 +0.5	709	16 11344
		76			572	19 10868
		89			475	22.2 10545
		102			405	25.5 10328
		115			352	28.7 10102
		127			316	31.7 10017
	-1.5 -3.5	139	30	+2.0 +1.0	289	34.7 10028
		152			255	38 9690
		178			215	44.5 9568
		203			187	50.7 9481
		254			153	64 9792
		305			127	76.3 9690



请按图示订货

代码	型号	孔径D	长度L
YSIB		10	25
		32	

YSIB—D10—L25



未税价(元)

数量	1~9	10~
价格	100%	另行报价



交货期
7

弹簧
氮气
弹簧

C4