


# 法兰型导向轴支座


- 引导型·安装孔通孔
- 加厚引导型·安装孔通孔

## 引导型·安装孔通孔

| 代码    | 类型       |        | 材质       |          | 表面处理     |
|-------|----------|--------|----------|----------|----------|
|       |          |        | 国标       | 相当       |          |
| GAE01 | 引导型      | 圆法兰型   | 45       | S45C     | 发黑       |
| GAE02 |          |        | 0Cr18Ni9 | SUS304   | 喷细砂无电解镀镍 |
| GAE06 |          |        |          |          | —        |
| GAE11 |          |        | —        |          |          |
| GAE12 |          | 方法兰型   | 45       | S45C     | 发黑       |
| GAE16 |          |        | 0Cr18Ni9 | SUS304   | 喷细砂无电解镀镍 |
| GAE21 |          |        |          |          | —        |
| GAE22 |          |        | 对边法兰型    | 45       | S45C     |
| GAE26 | 0Cr18Ni9 | SUS304 |          | 喷细砂无电解镀镍 |          |
|       |          |        |          |          | —        |

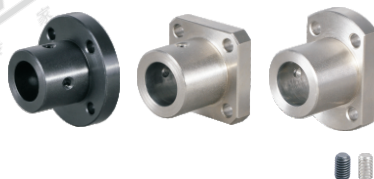

- ① 由于产品批次不同，发货电镀产品可能存在喷细砂，不影响尺寸及功能。  
② 如对防锈有要求，请优先选用不锈钢材质或喷细砂无电解镀镍产品。

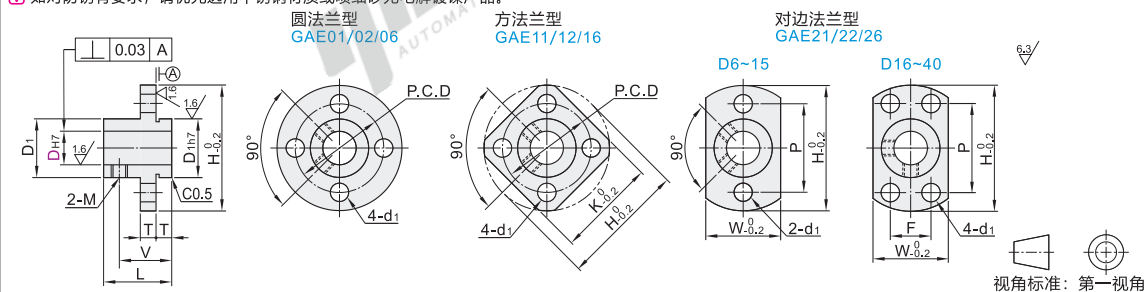


| 型号                               |                 |             | L  | D <sub>1</sub> | H   | T   | V  | M  | P.C.D | K  | W  | P  | F  | d <sub>1</sub> |
|----------------------------------|-----------------|-------------|----|----------------|-----|-----|----|----|-------|----|----|----|----|----------------|
| 代码                               | D <sub>H7</sub> |             |    |                |     |     |    |    |       |    |    |    |    |                |
| 圆法兰型<br>GAE01<br>GAE02<br>GAE06  | 6               | +0.012<br>0 | 15 |                | 28  | 3.5 | 12 | M3 | 20    | 22 | 12 | 20 |    | 3.5            |
|                                  |                 |             | 18 | 12             |     |     | 15 | M4 |       |    | 16 |    |    | 4.5            |
|                                  |                 |             |    |                |     | 5   |    | M3 |       |    |    |    |    | 3.5            |
|                                  |                 |             | 20 | 14             | 30  |     | 16 |    | 22    | 23 | 18 | 22 | —  |                |
|                                  | 8               | +0.015<br>0 | 24 | 16             | 36  |     | 19 |    | 26    | 28 | 20 | 26 |    |                |
|                                  |                 |             | 30 | 20             | 40  | 6   | 22 | M4 | 30    | 32 | 24 | 30 |    | 4.5            |
|                                  |                 |             |    |                |     |     | 23 |    | 32    | 33 | 26 | 28 | 16 |                |
|                                  |                 |             | 32 | 22             | 42  |     | 25 |    | 39    | 39 | 32 | 31 | 22 |                |
|                                  | 10              | +0.018<br>0 | 38 | 28             | 50  | 8   | 29 | M5 | 44    | 44 | 37 | 36 | 24 | 5.5            |
|                                  |                 |             |    |                |     |     | 30 |    | 52    | 52 | 42 | 41 | 27 | 6.6            |
|                                  |                 |             |    |                |     |     | 35 | M6 | 75    | 75 | 65 | 65 | 38 | 9              |
|                                  |                 |             | 50 | 60             | 90  | 10  |    |    |       |    |    |    |    |                |
| 方法兰型<br>GAE11<br>GAE12<br>GAE16  | 12              | +0.021<br>0 | 38 | 33             | 55  |     | 29 |    | 44    | 44 | 37 | 36 | 24 | 5.5            |
|                                  |                 |             |    |                |     |     | 30 |    | 52    | 52 | 42 | 41 | 27 | 6.6            |
|                                  |                 |             |    |                |     |     | 35 | M6 | 75    | 75 | 65 | 65 | 38 | 9              |
|                                  |                 |             | 50 | 60             | 90  | 10  |    |    |       |    |    |    |    |                |
|                                  | 15              | +0.025<br>0 | 45 | 40             | 65  |     | 35 |    | 52    | 52 | 42 | 41 | 27 | 6.6            |
|                                  |                 |             |    |                |     |     | 40 |    | 60    | 60 | 50 | 50 | 38 | 9              |
|                                  |                 |             |    |                |     |     | 45 |    | 70    | 70 | 60 | 60 | 45 | 11             |
|                                  |                 |             | 60 | 70             | 100 | 15  |    |    |       |    |    |    |    |                |
|                                  | 20              | +0.030<br>0 | 60 | 55             | 85  |     | 40 |    | 60    | 60 | 50 | 50 | 38 | 9              |
|                                  |                 |             |    |                |     |     | 45 |    | 70    | 70 | 60 | 60 | 45 | 11             |
|                                  |                 |             |    |                |     |     | 50 |    | 80    | 80 | 70 | 70 | 55 | 13             |
|                                  |                 |             | 75 | 85             | 110 | 20  |    |    |       |    |    |    |    |                |
|                                  | 25              | +0.035<br>0 | 75 | 70             | 100 |     | 45 |    | 70    | 70 | 60 | 60 | 45 | 11             |
|                                  |                 |             |    |                |     |     | 50 |    | 80    | 80 | 70 | 70 | 55 | 13             |
|                                  |                 |             |    |                |     |     | 55 |    | 90    | 90 | 80 | 80 | 60 | 15             |
|                                  |                 |             | 90 | 100            | 125 | 25  |    |    |       |    |    |    |    |                |
| 对边法兰型<br>GAE21<br>GAE22<br>GAE26 | 12              | +0.021<br>0 | 38 | 33             | 55  |     | 29 |    | 44    | 44 | 37 | 36 | 24 | 5.5            |
|                                  |                 |             |    |                |     |     | 30 |    | 52    | 52 | 42 | 41 | 27 | 6.6            |
|                                  |                 |             |    |                |     |     | 35 | M6 | 75    | 75 | 65 | 65 | 38 | 9              |
|                                  |                 |             | 50 | 60             | 90  | 10  |    |    |       |    |    |    |    |                |
|                                  | 15              | +0.025<br>0 | 45 | 40             | 65  |     | 35 |    | 52    | 52 | 42 | 41 | 27 | 6.6            |
|                                  |                 |             |    |                |     |     | 40 |    | 60    | 60 | 50 | 50 | 38 | 9              |
|                                  |                 |             |    |                |     |     | 45 |    | 70    | 70 | 60 | 60 | 45 | 11             |
|                                  |                 |             | 60 | 70             | 100 | 15  |    |    |       |    |    |    |    |                |
|                                  | 20              | +0.030<br>0 | 60 | 55             | 85  |     | 40 |    | 60    | 60 | 50 | 50 | 38 | 9              |
|                                  |                 |             |    |                |     |     | 45 |    | 70    | 70 | 60 | 60 | 45 | 11             |
|                                  |                 |             |    |                |     |     | 50 |    | 80    | 80 | 70 | 70 | 55 | 13             |
|                                  |                 |             | 75 | 85             | 110 | 20  |    |    |       |    |    |    |    |                |
|                                  | 25              | +0.035<br>0 | 75 | 70             | 100 |     | 45 |    | 70    | 70 | 60 | 60 | 45 | 11             |
|                                  |                 |             |    |                |     |     | 50 |    | 80    | 80 | 70 | 70 | 55 | 13             |
|                                  |                 |             |    |                |     |     | 55 |    | 90    | 90 | 80 | 80 | 60 | 15             |
|                                  |                 |             | 90 | 100            | 125 | 25  |    |    |       |    |    |    |    |                |

## 加厚引导型·安装孔通孔

| 代码    | 类型          | 材质    | 表面处理     |        | 附件(2PCS) |
|-------|-------------|-------|----------|--------|----------|
|       |             |       | 国标       | 相当     |          |
| GAE51 | 加厚引导型 安装孔通孔 | 圆法兰型  | 45       | S45C   | 发黑       |
| GAE52 |             |       | 0Cr18Ni9 | SUS304 | 喷细砂无电解镀镍 |
| GAE61 |             | 对边法兰型 | 45       | S45C   | 发黑       |
| GAE62 |             |       | 0Cr18Ni9 | SUS304 | 喷细砂无电解镀镍 |



- ① 由于产品批次不同，发货电镀产品可能存在喷细砂，不影响尺寸及功能。  
② 如对防锈有要求，请优先选用喷细砂无电解镀镍产品。  
③ 特点：由于固定部壁厚较厚，与标准型相比而言，难以倾倒。

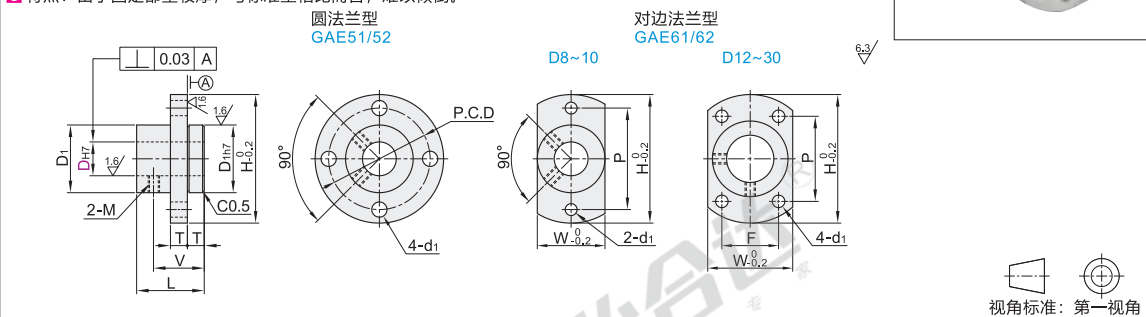

| 型号                      |                 |             | L  | D <sub>1</sub> | H  | T  | V  | M  | P.C.D | W  | P  | F  | d <sub>1</sub> |
|-------------------------|-----------------|-------------|----|----------------|----|----|----|----|-------|----|----|----|----------------|
| 代码                      | D <sub>H7</sub> |             |    |                |    |    |    |    |       |    |    |    |                |
| 圆法兰型<br>GAE51<br>GAE52  | 8               | +0.015<br>0 | 18 | 15             | 32 | 5  | 15 | M3 | 25    | 15 | 25 | —  | 3.5            |
|                         | 8M              |             |    |                |    |    | M4 |    |       |    |    |    |                |
|                         | 10              | +0.018<br>0 | 20 | 20             | 38 |    | 16 | M3 | 30    | 20 | 30 |    | 4.5            |
|                         | 12              |             | 24 | 22             | 40 |    | 19 |    | 32    | 25 | 28 | 16 |                |
| 16                      | 32              |             | 28 | 50             | 6  | 23 | M4 |    | 40    | 32 | 33 | 22 | 5.5            |
| 20                      |                 |             | 35 | 63             |    | 25 |    | 50 | 40    | 42 | 25 |    |                |
| 对边法兰型<br>GAE61<br>GAE62 | 25              | +0.021<br>0 |    | 40             | 68 |    | 28 | M5 | 55    | 45 | 45 | 30 | 6.6            |
|                         | 30              |             | 38 | 45             | 73 | 10 | 30 | M6 | 60    | 50 | 48 | 35 |                |

## 加厚引导型·安装孔通孔

| 代码        | 型号 | D <sub>H7</sub> |
|-----------|----|-----------------|
| GAE51     | 8  | +0.015          |
| GAE52     | 8M | 0               |
| GAE52—D8M | 10 | 0               |



| 优惠价 |            |
|-----|------------|
| 数量  | 1~9    10~ |
| 价格  | 100% 另行报价  |

| 交货期 |
|-----|
| 5   |

