


线槽


PVC方形线槽 标准型

代码	类型	销售方式	材质	颜色	阻燃等级	温度
ZIK04	标准型	根	环保硬质PVC	灰色	UL94V-0	-20℃~+70℃
ZIK10		米				
ZIK09		盒				



特性：开口齿槽，反扣式槽盖与槽体设计组合后绝不脱落，且接合面平滑，不割伤手及擦损附近配线。

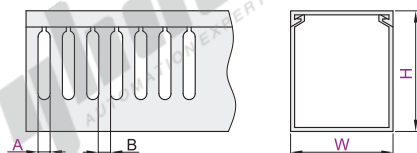

W≤60mm线槽底部孔尺寸



W≥80mm线槽底部孔尺寸

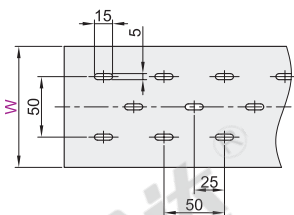

视角标准：第一视角

型号	W	A	B	销售方式：根 长度(米)	销售方式：米 起订数	销售方式：盒 包装方式(根/盒)
代码	H			仅ZIK04	仅ZIK10	仅ZIK09
ZIK04 ZIK10 ZIK09	20	20				130
	25	25				110
		25				90
		30				100
		35				80
		40				70
		25				60
		30				
		35				50
		50				
	25		若A尺寸为4, B尺寸则为6			60
	30					50
	40		若A尺寸为6, B尺寸则为7			40
	25	6		2	按2的倍数起订	60
	33	8	若A尺寸为8, B尺寸则为10			
	45					50
	25		若有区别请以 实物尺寸为准。			
	30					
	35					
	40					
	45					40
	50					
	55					36
	60					24
	80					20
	100					16
	25					12
	30					10
	35					32
	40					28
	45					24
	50					20
	55					16
	60					12

型号	W	A	B	销售方式：根 长度(米)	销售方式：米 起订数	销售方式：盒 包装方式(根/盒)
代码	H			仅ZIK04	仅ZIK10	仅ZIK09
ZIK04 ZIK10 ZIK09		45				40
		50				36
	60	60				30
		80				20
		100				18
		120				12
		25	若A尺寸为4, B尺寸则为6			40
		33				48
	65	35	若A尺寸为6, B尺寸则为7			40
		45				30
		65	若A尺寸为8, B尺寸则为10			40
		25				36
		30				32
		35	若有区别请以 实物尺寸为准。	2	按2的倍数起订	28
		40				
		45				24
	80	50				20
		55				16
		60				12
		80				10
		100				32
		120				28
		35				24
		40				20
		50				16
		60				12



请按图示订货

型号	W	A
代码	H	
ZIK04	40	4
	50	6

ZIK04 — H40 — W40 — A4