


圆皮带用滑轮

梯形槽 开口式夹固定

代码	类型		材质		表面处理
			国标	相当	
ENS71	开口式夹固定	梯形槽	45	S45C	发黑
ENS72			LF2	A5052	喷细砂本色阳极氧化

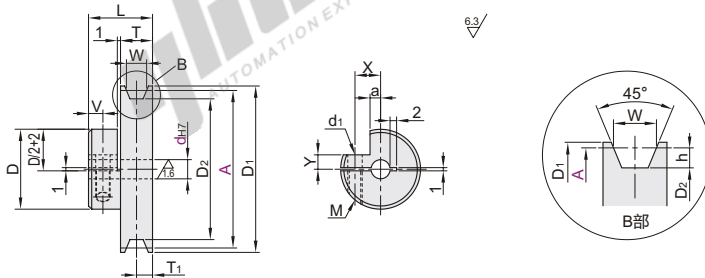

□ M=M3时, d1=Ø3.3
M=M4时, d1=Ø4.3

视角标准: 第一视角

型号		皮带半径	dH7选择	D	D1	D2	h	W	L	T	T1	V	X	Y	a	M	适用皮带直径	
代码	A																	
ENS71	20		4 5	16	22	18							5	4.2	2			
	30	1	4 5 6 6.35 8	20	32	28	1	2.2	11	5	2.5		7	5	4	M3	2	
	40				42	38						2.5						
	30	1.5	4 5 6 6.35 8	20	32	27	1.5	3.3	16				7	5	4	M3		
	40				42	37												
	45		4 5 6 6.35 8 10 11 12	25	47	42						4.5	9	6.2	5.2	M4	3	
	60				62	57			20									
	23				25	19												
	28		4 5 6 6.35 8	20	30	24							2.5	7	5	4	M3	
	30				32	26			16									
	40	2			42	36	2	4.4										
	45				47	41												
	48		4 5 6 6.35 8 10 11 12	25	50	44			20				4.5	9	6.2	5.2	M4	4
	60				62	56												
	80				82	76												
	28	ENS72	4 5 6 6.35 8	20	30	23			16		10	5	2.5	7	5	4	M3	
	40				42	35												
	48				50	43												
	50	2.5	4 5 6 6.35 8 10 11 12	25	52	45	2.5	5.5	20				4.5	9	6.2	5.2	M4	5
	60				62	55												
75				77	70													
80				82	75													
28		4 5 6 6.35 8	20	30	22			16				2.5	7	5	4	M3		
38		4 5 6 6.35		40	32								6.5	4.5	2.5			
48				50	42													
50				52	44													
58	3	4 5 6 6.35 8 10 11 12	25	60	52	3	6.6	20				4.5	9	6.2	5.2	M4	6	
60				62	54													
75				77	69													
95				97	89													
100				102	94													

滑轮

F8



型号		皮带半径	dH7选择
代码	A		
ENS71	20	4 5 6 6.35 8	4 5
ENS72	30		

ENS71—A20—1—d5



优惠价	
数量	价格
1~9	100%
10~	另行报价



7
