




代码	类型		材质	阻燃等级	防护等级	使用温度
ZIL55	快装式通线孔	柔绕型	TPE	UL94HB	IP67	-50°C ~ +125°C

特点:

- 电缆活动时也可保持高度的防水、防尘性能;
- 备有丰富的产品系列, 适用于Ø5~30的各种电缆直径。

RoHS

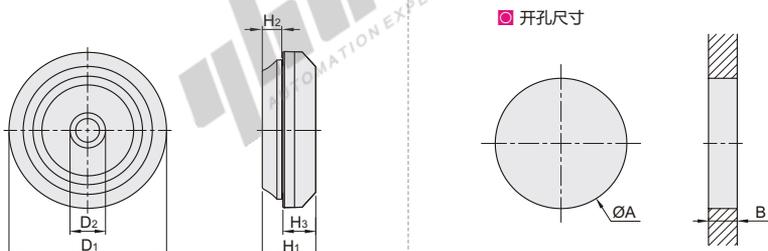

开孔尺寸



型号		颜色	适用电缆直径	D1	D2	H1	H2	H3	开孔尺寸(Ø) A	适用板厚 B	重量 (g)	
代码	规格											
ZIL55	518	GY(浅灰)	Ø5~10	23.5	4	11	4	6.75	16.5	0.5~3	3	
	519		Ø6~13	27.5	5				20.5		4	
	520		Ø8~17	32.5	7				25.5		0.5~3.5	5
	521		Ø12~24	39.5	11				32.5		0.5~4.5	7
	522	B(黑色)	Ø19~30	47.5	18	13.5	4.84	7.41	40.5	1.5~4.5	12	
	523		Ø5~10	23.5	4	16.5	0.5~3	3				
	524		Ø6~13	27.5	5	20.5		4				
	525		Ø8~17	32.5	7	25.5		0.5~3.5	5			
	526	Ø12~24	39.5	11	32.5	0.5~4.5		7				
	527	W(白色)	Ø19~30	47.5	18	13.5	4.84	7.41	40.5	1.5~4.5	12	
	528		Ø5~10	23.5	4	16.5	0.5~3	3				
	529		Ø6~13	27.5	5	20.5		4				
	530		Ø8~17	32.5	7	25.5		0.5~3.5	5			
	531	Ø12~24	39.5	11	32.5	0.5~4.5		7				
	532	Ø19~30	47.5	18	13.5	4.84	7.41	40.5	1.5~4.5	12		




型号		颜色
代码	规格	
ZIL55	518	GY(浅灰)
	519	



ZIL55—518—GY



弹性薄膜紧密贴合于电缆



① 电缆活动时也可保持高度的防水、防尘性能。

固定零件

