


拖链/接头


65系列·内外径打开·带黄点卡扣 一般用 加强型

拖链


代码	类型	开口方向	横梁	腔数	材质	颜色	允许温度	阻燃等级	附件
VBTO1	65系列拖链	内外径打开	桥式	单腔	工程塑料	黑色	-20°C~80°C	UL94-HB	接头
VBTO2		封闭式							

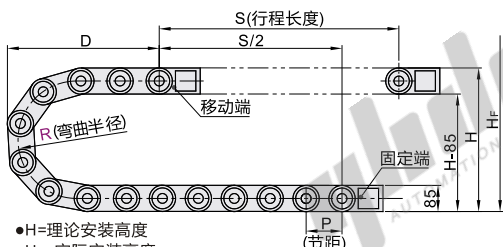

- H=理论安装高度
- Hf=实际安装高度
- D=拖链退回到极限位置时的最小距离
- K=π·R+安全量



- 架空长度:
FLG=直线架空长度
FLB=安全场腰架空长度

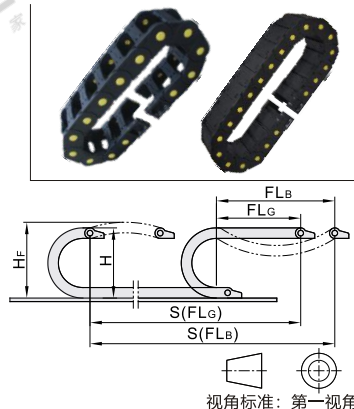


视角标准：第一视角

链节数/m=13

型号		弯曲半径R	链节数N	接头	安装尺寸			实际安装高度H _F	外宽E	节距P	最大电缆直径	最大架空长度(m)	最大允许行程(m)	最大允许垂直悬挂(m)	重量(kg/m)						
代码	内宽F				H	D	K														
VBT01	50	150		VET01-F50	385	285	750	465	84						≈2.78						
		200			485	335	910	565													
		250			585	390	1070	665													
	75	150		VET01-F75	385	285	750	465	109											≈2.93	
		200			485	335	910	565													
		250			585	390	1070	665													
	100	150		VET01-F100	385	285	750	465	134											≈3.04	
		200			485	335	910	565													
		250			585	390	1070	665													
	125	150		VET01-F125	385	285	750	465	160											≈3.20	
		200			485	335	910	565													
		250			585	390	1070	665													
	130	150		VET01-F130	385	285	750	465	164											≈3.25	
		200			485	335	910	565													
		250			585	390	1070	665													
	150	150		VET01-F150	385	285	750	465	184											≈3.29	
		200			485	335	910	565													
		250			585	390	1070	665													
	175	150	1~	VET01-F175	385	285	750	465	209							80	60	4	100	40	≈3.38
		200			485	335	910	565													
		250			585	390	1070	665													
	200	150		VET01-F200	385	285	750	465	234												≈3.55
		200			485	335	910	565													
		250			585	390	1070	665													
	250	150		VET01-F250	385	285	750	465	284												≈3.94
		200			485	335	910	565													
		250			585	390	1070	665													
VBT02	75	150		VET01-F75	385	285	750	465	103						≈3.30						
		200			485	335	910	565													
		250			585	390	1070	665													
	100	150		VET01-F100	385	285	750	465	134						≈3.52						
		200			485	335	910	565													
		250			585	390	1070	665													
	130	150		VET01-F130	385	285	750	465	164						≈3.89						
		200			485	335	910	565													
		250			585	390	1070	665													
	150	150		VET01-F150	385	285	750	465	184						≈4.10						
		200			485	335	910	565													
		250			585	390	1070	665													
	175	150		VET01-F175	385	285	750	465	209						≈4.39						
		200			485	335	910	565													
		250			585	390	1070	665													

接头

代码	类型	材质	颜色	允许温度	阻燃等级
VET01	加强型65系列拖链用 方型	工程塑料	黑色	-20°C~80°C	UL94-HB

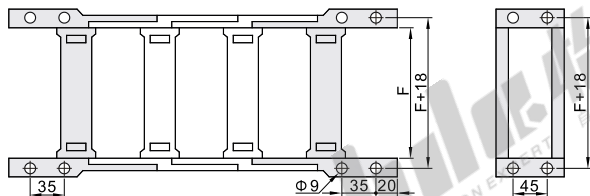

视角标准：第一视角

型号	内宽F
VBTO1	50
	75
	100
	125
	130
	150
	175
	200
	250



请按图示订货

拖链

型号	内宽F	弯曲半径R	链节数N
VBTO1	50	55	1~
	75	75	

VBTO1—F50—R75—N12

接头

型号	内宽F
VET01	50
	75

VET01—F50



未税价(元)

优惠价

数量	1~9	10~
价格	100%	另行报价



交货期

8