
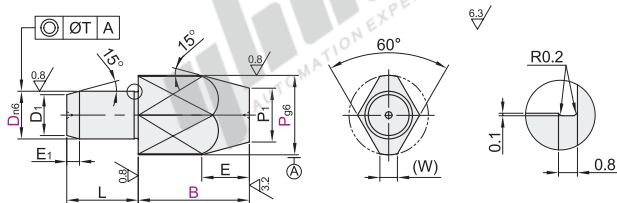


定位销

多棱型·P.B尺寸选择型 大头锥角型 D公差n6

P.B尺寸选择型	材质		硬度	表面处理
Dn6	国标	相当		
YBR92	9CrWMn	SKS3	淬火硬度58HRC~	镀硬铬，镀层厚度3~5μm
YBR97	Cr12MoV	SKD11		—



■ B尺寸公差表

B	公差
7~10	+0.046 +0.010
12~18	+0.055 +0.012
22~25	+0.067 +0.015

① $D_1 = D - E_1 \cdot \tan 15^\circ$; $P_1 = P - E \cdot \tan 15^\circ$

② 工艺孔加工条件: $D \neq P$ 且 $(D \cdot P \cdot L \cdot B) \geq 4$ 。(工艺孔详细尺寸见产品简介)



视角标准：第一视角

型号		P _{g6}		B	L	E	E ₁	T	(W)
代码	D _{n6}								
YBR92 YBR97	4		6	-0.004 -0.012	7 12	6	4	1.2	1
		+0.016 +0.008	8	-0.005 -0.014	10 16			0.02	1.6
	6		10	-0.006 -0.017	10 18	9	6	1.6	2.5
		+0.019 +0.010	12	-0.006 -0.017	10 18				2.5
	8		16	-0.006 -0.017	13 22	12	8	2	3.5
	12	+0.023 +0.012	20	-0.007 -0.020	15 25	18	9	2	5
			25					2.5	



请按图示订货

型号	D	P	B
代码			
YBR92	4	6	7~12
YBR97	6	8	10 16

YBR92—D4—P6—B7



未税价(元)

● 优惠价

数量	1~4	5~
价格	100%	另行报价



交货期

5