


无防尘盖式 ▶
标准型

深沟球轴承

代码	类型	轴承类型 代码	轴承游隙	轴承精度	轴承材质	
					国标	相当
BAR	标准型	6	CO/CN	GB/T 307.1 6级	GCr15	SUJ2
BAR06		16				

- ① 出厂前未封入润滑脂，请在使用前封入。
② 不承诺品牌。

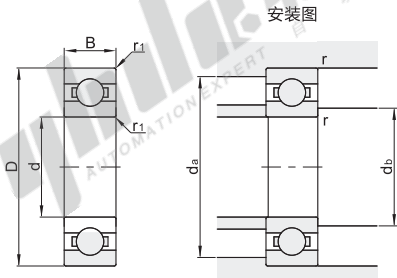

视角标准：第一视角

轴承类型代码6

型号		d	D	B	r ₁ (min)	基本额定负载(KN)		极限转速 rpm (参考)	安装尺寸				重量 (g) (参考)
代码	轴承型号					Cr(动)	Cor(静)		d _b			r (max)	
									(min)	(max)	d _a (max)		
BAR	6700	10	15	3	0.2	0.85	0.43	15000	10.4	11.21	14.2	0.2	5
	6800		19	5		1.83	0.93	24000		12.5	17		9
	6900		22	6	0.3	2.7	1.27	21000	12	13	20	0.3	18
	6000		26	8		4.55	1.97	21000		13.5	24		32
	6200		30	9	0.6	5.1	2.39	18000	14	16	26	0.6	53
	6300	35	11	1.6	8.1	3.45	16000		17	31		2	
	6701	18	4	0.2	1.1	0.7	8300	13.6	13.8	16.4	0.2	6	
	6801	21	5		1.92	1.04	20000		14.5	19		11	
	6901	24	6	0.3	2.89	1.46	19000	14	15	22	0.3	22	
	6001	28	8		5.1	2.37	18000		16	26		37	
	6201	32	10	0.6	6.82	3.08	16000	16	17	28	0.6	60	
	6301	37	12	1	9.7	4.2	15000	17	18.5	32	1	3	
	6702	21	4	0.2	0.94	0.58	6600	16.6	16.8	19.4	0.2	7	
	6802	24	5		2.1	1.25	17000		17.5	22		16	
	6902	28	7	0.3	4.3	2.3	16000	17		26	0.3	30	
	6002	32	9		5.6	2.84	15000		19	30		45	
	6202	35	11	0.6	7.6	3.7	15000	19	20	31	0.6	82	
	6302	42	13	1	11.4	5.45	12000	20	23	37	1	8	
	6803	26	5		2.2	1.5	15000		19.5	24		18	
	6903	30	7	0.3	4.6	2.6	14000	19	20	28	0.3	39	
	6003	35	10		6	3.25	14000		21	33		66	
	6203	40	12	0.6	9.57	4.8	12000	21	23	36	0.6	115	
	6303	47	14	1	13.6	6.6	11000	22	25	42	1	270	
	6403	62	17	1.1	28.8	10.6	14000	23.5	—	55.5		5	
	6704	27	4	0.2	1.04	0.73	5000	21.6	22.3	25.4	0.2	19	
	6804	32	7	0.3	3.5	2.2	13000		22.5	30		36	
	6904	37	9		6.4	3.7	12000	22	24	35	0.3	69	
	6004	42	12	0.6	9.38	5.03	11000		26	38	0.6	106	
	6204	47	14	1	12.8	6.65	10000	25		42		144	
	6304	52	15		15.9	7.8	10000	26.5	28.5	45.5	1	400	
	6404	72	19	1.1	28.5	13.9	12000		—	65.5		22	
	6805	37	7		4.3	2.95	10000	27	28	35		42	
	6905	42	9	0.3	7.02	4.53	9800		29	40	0.3	80	
	6005	47	12	0.6	10.07	5.82	9400	29	30.5	43	0.6	128	
	6205	52	15	1	14	7.88	8900	30	32	47	1	232	
	6305	62	17	1.1	20.6	11.2	8100	31.5	35	55.5		530	
	6405	80	21	1.5	34.5	17.5	10000	33	—	72	1.5	26	
	6806	42	7	0.3	4.96	3.62	8800	32	33	40	0.3	48	
	6906	47	9		7.24	5	8400		34	45		116	
	6006	55	13	1	13.2	8.27	7700	35	37	50	1	199	
	6206	62	16		19.5	11.3	7300		39	57		360	
	6306	72	19	1.1	26.7	15	6600	36.5	43	65.5		735	
	6406	90	23	1.5	43.5	23.9	8800	38	—	82	1.5	29	
	6807	47	7	0.3	4.2	3.5	7600	37	38	45	0.3	74	
	6907	55	10	0.6	9.6	6.8	7100	39	40	51	0.6	155	
	6007	62	14	1	15.9	10.3	6800	40	42	57	1	288	
	6207	72	17	1.1	25.7	15.3	6300	41.5	45	65.5		457	
	6307	80	21		33.5	19.2	6000	43	47	72	1.5	952	
	6407	100	25	1.5	55	31	7800	43	—	92		33	
	6808	52	7	0.3	5.07	4.37	6700	42	43	50	0.3	110	
	6908	62	12	0.6	13.7	9.9	6300	44	45	58	0.6	190	
	6008	68	15	1	16.8	11.5	6100	45	47	63	1	366	
	6208	80	18	1.1	30.8	19.8	5800	46.5	51	73.5		630	
	6308	90	23	1.5	40.7	24	5300	48	54	82	1.5	1230	
	6408	110	27	2	52.5	30.2	7000	50	—	100	2	128	
	6909	68	12	0.6	14.1	10.9	5600	49	51	64	0.6	237	
	6009	75	16	1	19.9	14	5400	50	52.5	70	1	398	
	6209	85	19	1.1	31.2	20.3	5200	51.5	55.5	78.5		814	
	6309	100	25	1.5	52.6	31.8	4700	53	61.5	92	1.5	1530	
	6409	120	29	2	77.4	45.08	6300	55	—	110	2		

1Kg=9.81N

深沟球轴承

无防尘盖式 标准型

轴承类型代码6

代码	型号 轴承型号	d	D	B	r ₁ (min)	基本额定负载(KN)		极限转速 rpm (参考)	安装尺寸				重量 (g) (参考)
						Cr(动)	Cor(静)		d _b		d _a	r	
									(min)	(max)	(max)	(max)	
	6910		72	12	0.6	16.1	13.1	5300	54	55.5	68	0.6	135
	6010		80	16	1	21.8	16.6	4600	55	57.5	75		261
	6210		90	20	1.1	35	23.2	4700	56.5	60	83.5	1	454
	6310		110	27	2	62	38.5	4200	59	68.5	101	2	1060
	6410		130	31	2.1	83	49.5	5700	62	—	118		1880
	6811		72	9	0.3	9.1	8.5	4800	57	59	70	0.3	83
	6911		80	13	1	15.96	13.25	4300	60	61.5	75		180
	6011		90	18	1.1	30.9	22.4	4500	61.5	64	83.5	1	388
	6211		100	21	1.5	43.4	29.2	4300	63	67	92	1.5	601
	6311		120	29	2	71.5	44.6	3900	64	74	111	2	1370
	6411		140	33	2.1	100.7	62.5	5200	67	—	128		2290
	6812		78	10	0.3	9.1	8.7	4400	62	64.5	76	0.3	106
	6912		85	13	1	28.7	17.2	4300	65	66.5	80		193
	6012		95	18	1.1	30.7	22.7	4100	66.5	69	88.5	1	414
	6212		110	22	1.5	52.4	35.9	3800	68	75	102	1.5	783
	6312		130	31	2.1	81.8	51.8	3600	71	80.5	119	2	1730
	6412		150	35		102	64.5	4800	72	—	138		2770
	6813		85	10	0.6	11.9	11.5	4100	69	70	81	0.6	128
	6913		90	13	1	17.4	16.1	4000	70	71.5	85		206
	6013		100	18	1.1	29.2	23.5	3900	71.5	74	93.5	1	421
	6213		120	23	1.5	57.2	40	3600	73	80.5	112	1.5	990
	6313		140	33		92.7	59.8	3300	76	86	129	2	2080
	6413		160	37	2.1	111	72.5	4400	77	—	148		3300
	6814		90	10	0.6	12.2	11.9	3800	74	75.5	86	0.6	137
	6914		100	16	1	23.7	21.1	3700	75	77.5	95		334
	6014		110	20	1.1	38.6	30.4	3600	76.5	80.5	103.5	1	604
	6214		125	24	1.5	62.2	44	3400	78	85	117	1.5	1070
	6314		150	35	2.1	104.1	68	3100	81	92.5	139	2	2520
	6414		180	42	3	128	89.5	4100	84	—	166	2.5	4830
	6815		95	10	0.6	12.5	12.8	3600	79	80	91	0.6	145
	6915		105	16	1	24.3	22.5	3500	80	82.5	100		353
	6015		115	20	1.1	40.1	33.1	3300	81.5	85.5	108.5	1	649
	6215		130	25	1.5	66.2	49.3	3200	83	90.5	122	1.5	1180
	6315		160	37	2.1	114	76.5	2900	86	99	149	2	3020
	6415		190	45	3	153.2	113.7	3800	89	—	176	2.5	5720
	6816		100	10	0.6	12.8	12.7	3400	84	85	96	0.6	154
	6916		110	16	1	25	23.9	3200	85	88	105		373
	6016		125	22	1.1	47.5	39.8	3100	86.5	91.5	118.5	1	854
	6216		140	26	2	72.7	53	3000	89	95.5	131	2	1400
	6316		170	39	2.1	90.4	69.6	2700	91	105	159		3590
	6416		200	48	3	163.2	124.5	3600	94	—	186	2.5	6760
	6817		110	13	1	19.8	19.2	3100	90	91	105		270
	6917		120	18		31.9	29.7	3000		94	113.5	1	536
	6017		130	22	1.1	52.8	44.5	2900	91.5	97	123.5		890
	6217		150	28	2	83.3	63.8	2800	94	103	141	2	1790
	6317		180	41	3	132.7	96.6	2600	98	112	167	2.5	4230
	6417		210	52	4	165	128	3400	103	—	192	3	7950
	6818		115	13	1	19	19.7	3000	95	96	110		285
	6918		125	18	1.1	32.8	31.5	2900	96.5	99	118.5	1	554
	6018		140	24	1.5	61.2	50.6	2800	98	102	132	1.5	1020
	6218		160	30	2	96	71.5	2600	99	109	151	2	2150
	6318		190	43	3	142.6	107.2	2400	103	118	177	2.5	4910
	6819		120	13	1	20.8	19.8	2800	100	101	115		300
	6919		130	18	1.1	33.7	33.4	2800	101.5	104	123.5	1	579
	6019		145	24	1.5	60.8	51	2600	103	109	137	1.5	1080
	6219		170	32	2.1	109	82	2500	106	116	159	2	2620
	6319		200	45	3	156.6	121.8	2300	108	125	187	2.5	5670
	6820		125	13	1	20.1	22	2700	105	106	120		313
	6920		140	20	1.1	42.7	41.9	2600	106.5	110	133.5	1	783
	6020		150	24	1.5	60.2	54.2	2600	108	110	142	1.5	1150
	6220		180	34	2.1	122	92.7	2300	111	122	169	2	3140
	6320		215	47	3	173	140.2	2200	113	133	202	2.5	7000
	6420		250	58	4	206	175	2900	118	—	232	3	15000
	6821		130	13	1	19.8	22	4800	110	110.5	125		330
	6921		145	20	1.1	42.5	42	2500	111.5	115	138.5	1	816
	6021		160	26	2	59.2	61.2	2400	114	119	151		1590
	6221		190	36	2.1	133	105	2300	116	125	179	2	3700
	6321		225	49	3	183.7	153.1	2100	118	134	212	2.5	8050
	6822		140	16	1	28.1	30.7	4300	115	117	135		515
	6922		150	20	1.1	43.5	44.5	2400	116.5	120	143.5	1	849
	6022		170	28	2	82	73	2300	119	126	161		1960
	6222		200	38	2.1	144	117	2200	121	132	189	2	4360
	6322		240	50	3	205	178.3	1900	123	149	227	2.5	9540
	6824		150	16	1	28.9	32.1	4000	125	127	145		555
	6924		165	22	1.1	53	53.9	3800	126.5	132	158.5	1	1150
	6024		180	28	2	88.1	79.7	2100	129	136	171		2070
	6224		215	40	2.1	155.3	131	2000	131	143	204	2	5150
	6324		260	55	3	227.6	207.4	2200	133	161	247	2.5	12400
	6826		165	18	1.1	37.9	42.9	3600	136.5	138	158.5	1	800
	6926		180	24	1.5	65.1	67.2	3400	138	144	172	1.5	1520
	6026		200	33	2	105	96.8	3200	139	148	191	2	3160
	6226		230	40	3	165	148	2600	143	157	217	2.5	5820
	6326		280	58	4	250.9	238.7	2200	146	175	264	3	15300
	6828		175	18	1.1	38.2	44.3	3400	146.5	148.5	168.5	1	850
	6928		190	24	1.5	68.5	71.5	3200	148	153.5	182	1.5	1620
	6028		210	33	2	105.4	101.8	3000	149	158	201	2	3350

1Kg=9.81N

无防尘盖式 标准型

深沟球轴承

轴承类型代码6

型号		d	D	B	r ₁ (min)	基本额定负载(KN)		极限转速 rpm (参考)	安装尺寸				重量 (g) (参考)
代码	轴承型号					d _b			d _a (max)	r (max)			
						Cr(动)	Cor(静)		(min)	(max)			
BAR	6228	140	250	42	3	166	150	2400	153	171.5	237	2.5	7680
	6328		300	62	4	211.4	254	2000	156	187	284	3	18500
	6830		190	20	1.1	47.5	55	3000	156.5	160	183.5	1	1160
	6930		210	28	2	84.7	90.2	2800	159	166	201	2	2470
	6030	150	225	35	2.1	131.7	124.5	2600	161	169	214	2	4080
	6230		270	45	3	176	168	2000	163	186	257	2.5	9410
	6330		320	65	4	221.6	270	1900	166	203	304	3	22000
	6832		200	20	1.1	49.6	59.1	2800	166.5	170.5	193.5	1	1230
	6932		220	28	2	86.9	95.6	2600	169	176	211	2	2610
	6032	160	240	38	2.1	136.6	135.4	2400	171	183	229	2	5050
	6232		290	48	3	215	218	1900	173	202	277	2.5	11700
	6332		340	68	4	301	317	1800	176	215.5	324	3	26000
	6834		215	22	1.1	59.8	70.4	2600	176.5	182	208.5	1	1630
	6934		230	28	2	86	95.5	2400	179	186	221	2	2740
	6034	170	260	42	2.1	168	172	2200	181	194.5	249	2	6760
	6234		310	52	4	212	223	1900	186	215	294	3	14500
	6334		360	72	4	335.5	378.1	1700	186	—	344	3	30700
	6836		225	22	1.1	60.5	73	2400	186.5	192	218.5	1	2030
	6036	180	280	46	2.1	189	199	2000	191	208	269	2	8800
	6236		320	52	4	227	241	1800	196	223	304	3	15100
	6038	190	290	46	2.1	172	187	2000	201	218	279	2	9180
	6238		340	55	4	255	281	1700	206	236	324	3	18200
	6338		400	78	5	378	439	1000	210	—	380	4	41000
	6940	200	280	38	2.1	149	168	2000	211	222	269	2	7100
	6040		310	51	4	218	243	1900	211	299	299	2	11900
	6240		360	58	4	269	310	1700	216	252	344	3	21600
	6340		420	80	5	410	500	1500	220	—	400	4	46300
	6844	220	270	24	1.5	78	110	1900	228	233.5	262	1.5	3000
	6044		340	56	3	247	290	1800	233	254.5	327	2.5	18500
	6244		400	65	4	296	365	1500	236	—	384	3	37000
	6948	240	320	38	2.1	159	200	1800	251	262	309	2	8600
	6952		360	46	4	212	270	1600	271	—	349	2	14500
	6052	260	400	65	4	291	375	1500	276	—	384	3	29500
	6856		350	33	2	138	200	1600	289	—	341	2	7400
	6056	280	420	65	4	302	405	1400	296	—	404	3	31000
	6960	300	380	56	3	270	375	1300	313	—	407	2.5	24500
	6864		400	38	2.1	172	255	1300	331	—	389	2	11000
	6964	320	440	56	3	273	400	1200	333	—	427	2.5	25500
	6072	360	540	82	5	462	735	1000	380	—	520	4	64500
	6076	380	560	82	5	462	750	950	400	—	540	4	67500

1Kg=9.81N

轴承类型代码16

代码	型号 轴承型号	d	D	B	r ₁ (min)	基本额定负载(KN)		极限转速 rpm(参考)	安装尺寸			重量(g) (参考)
						Cr(动)	Cor(静)		d _b (min)	d _a (max)	r(max)	
BAR06	16001	12	28	7	0.3	5.1	2.37	32000	14	26	—	19
	16002	15	32	8	0.3	5.6	2.83	28000	17	30	—	27
	16003	17	35	9	0.3	6	3.25	26000	19	33	—	33
	16004	20	42	10	0.3	7.9	4.45	20000	22	40	—	48
	16005	25	47	11	0.3	8.85	5.6	18000	27	45	—	59
	16006	30	55	12	0.3	11.2	7.35	15000	32	53	—	87
	16007	35	62	14	0.3	11.7	8.2	13000	37	60	—	107
	16008	40	68	15	0.3	12.6	9.65	12000	42	66	—	130
	16009	45	75	16	0.3	14.9	11.4	11000	49	71	—	167
	16010	50	80	17	0.3	15.4	12.4	10000	54	76	—	175
	16011	55	90	18	0.3	19.4	16.3	9000	59	86	—	257
	16012	60	95	19	0.3	20	17.5	8500	64	91	—	281
	16013	65	100	20	0.3	20.5	18.7	8000	69	96	—	300
	16014	70	110	22	0.3	26.8	23.6	7100	74	106	—	441
	16015	75	115	23	0.3	27.6	25.3	6700	79	111	—	463
	16016	80	125	24	0.3	32	29.6	6300	84	121	—	621
	16017	85	130	25	0.3	33	31.5	6000	89	126	—	652
	16018	90	140	26	0.3	41.5	39.5	5600	95	135	—	873
	16019	95	145	27	0.3	43	—	5300	100	140	—	904
	16020	100	150	28	0.3	42.5	42	5300	105	145	—	945
	16021	105	160	18	1	52	50.5	4800	110	155	—	1240
	16022	110	170	19	1	57.5	56.5	4500	115	165	—	1510
	16024	120	180	20	1	56.5	57.5	4300	125	175	—	1600
	16026	130	200	22	1.1	75.5	77.5	3600	136.5	193.5	—	2400
	16028	140	210	23	1.1	77.5	82.5	3400	146.5	203.5	—	2840
	16030	150	225	24	1.1	84	91	3000	156.5	218.5	—	3620
	16032	160	240	25	1.5	99	108	2800	168	232	—	4200
	16034	170	260	28	1.5	114	126	2600	178	252	—	5710
	16036	180	280	31	2	145	157	2400	189	271	—	7500
	16038	190	290	31	2	149	168	2400	199	281	—	7780
	16040	200	310	34	2	161	180	2200	209	301	—	10000

1Kg=9.81N

轴承类型代码6

代码	型号	轴承型号	d
BAR	6200	6800	10

请按图示订货 BAR6700

优惠价	数量 1~9	10~
价格	100%	另行报价

未税价(元)

轴承类型代码16

代码	型号	轴承型号	d
BAR06	16001	16002	12
BAR06	16001	16002	15

交货期 5

EX Example 使用示例

① 深沟球轴承内部装配轴，外部固定块用于固定，起到支撑、传动的作用。

