


# 高度调整块


## 标准滑轨型 微型直线导轨用



基准侧  
ICB01/06

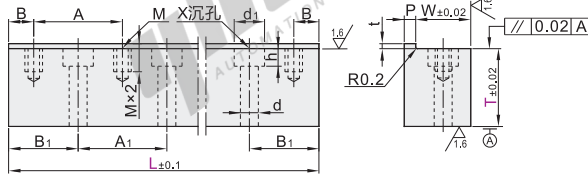

自由侧  
ICB21/26

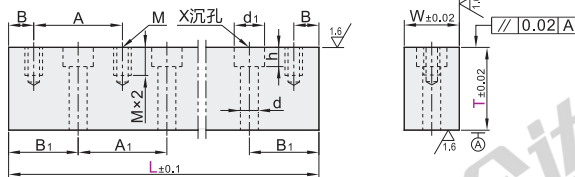

视角标准：第一视角

代码	规格 (直线导轨高度H)	L 选择										T 最小单位1	W	P	t	B	A	B <sub>1</sub>	A <sub>1</sub>	M	X(通孔+沉孔)						
		8	10	13	16	20	d	d <sub>1</sub>	h																		
ICB01	8	40	55	70	85	100	115	130					7	2	1	5	15	12.5	15	M2	3.3	6	3.3				
ICB06	10	55	75	95	115	135	155	175	195	215	235	255	275		9	1.5	7.5	20	17.5	20		4.3	7.5	4.3			
ICB21	13	70	95	120	145	170	195	220	245	270	295	320	345	370	395	10~65	12	3	2	10	25	22.5	25	M3			
ICB26	16	110	150	190	230	270	310	350	390	430	470				15		3	15	40	35	40		5.3	9	5.3		
	20	160	220	280	340	400	460								20		4	20	60	50	60	M5	6.3	11	6.3		

① T≤M×4时，螺纹底孔贯穿。

### 孔数表

规格 直线导轨高度H	L	M 螺孔数	X 沉孔数	规格 直线导轨高度H	L	M 螺孔数	X 沉孔数
8	40	3	2	13	220	9	8
	55	4	3		245	10	9
	70	5	4		270	11	10
	85	6	5		295	12	11
	100	7	6		320	13	12
	115	8	7		345	14	13
	130	9	8		370	15	14
10	55	3	2	16	395	16	15
	75	4	3		110	3	2
	95	5	4		150	4	3
	115	6	5		190	5	4
	135	7	6		230	6	5
	155	8	7		270	7	6
	175	9	8		310	8	7
	195	10	9		350	9	8
	215	11	10		390	10	9
	235	12	11		430	11	10
13	255	13	12	20	470	12	11
	275	14	13		160	3	2
	70	3	2		220	4	3
	95	4	3		280	5	4
	120	5	4		340	6	5
	145	6	5		400	7	6
170	7	6	460	8	7		
195	8	7					



型号	规格	L 选择	T
ICB01	8	40 55 70	10~65
ICB06	10	55 75 95	
ICB21	13	70 95 120	

ICB01—8—L55—T10



数量	1~9	10~
价格	100%	另行报价



① 数量1~49pcs