


# 加强筋

## 螺孔型 弧拱型

代码	类型		材质		表面处理
			国标	相当	
ZGC61	弧拱型	螺孔型	45	S45C	镀铬
ZGC62					发黑
ZGC65			LD30	A6061	本色阳极氧化
ZGC66					黑色阳极氧化

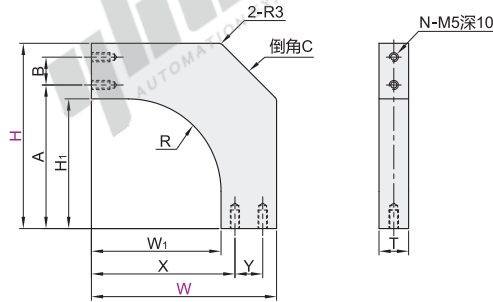

代码	型号		H	T	W <sub>1</sub>	H <sub>1</sub>	X	Y	A	B	N	R	C	
	W													
(S45C) ZGC61 ZGC62	50	50	50			30			40	—	2			
		60			30	40	40		50			25	15	
		80				50			57.5	15	3			
	60	100				70			77.5					
		60				40			50	—	2			
		80		12		40	50	50	57.5	15	3	30	17.5	
		100				70			77.5					
		120				80			90	20				
		80				50	57.5	15	15	77.5	15		40	20
	(A6061) ZGC65 ZGC66	80	100			70			77.5	15				
			120			80			90	20				
			150				100			112.5	25			
100		100				70			77.5	15				
		120				80			90	20				
		150			70	77.5	15	15	112.5	25		50	30	
		180				120			135	30	4			
		120				80			90	20				
		150		16		80	90	20	112.5	25			60	37.5
120		180				120			135	30				
		200				120			140	40				
		150				100			112.5	25				
	180				120	112.5	25	135	30		75	45		
	200				120			140	40					
	150				100	120	112.5	25	135	30		75	45	
					120			140	40					

① W=50、60时，底部安装面为1个安装孔，因此无需指定Y尺寸。  
 ② H=50、60时，侧面安装面为1个安装孔，因此无需指定B尺寸。



型号		H	T
ZGC61	W	60	12
ZGC62	W	60	12

ZGC62—W50—H50



优惠价	
数量	1~9 10~
价格	100% 另行报价

