



旋转抓取模块

旋转摆台

代码	类型	本体材质	表面处理
NIQ55	旋转摆台	航空硬铝	硬质阳极氧化

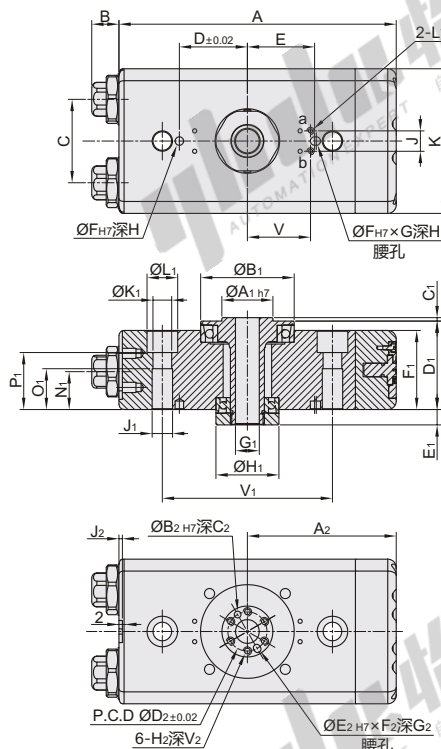

- ① A/a: 顺时针旋转进气口;
- ② B/b: 逆时针旋转进气口。



视角标准：第一视角

型号	6bar气压下的 扭矩(N·m)	旋转角度 (°)	调整角度 (°)	旋转时间 (s)	使用压力范围 (bar)	空气消耗量/ 周期(cm³)	使用环境温度 (°C)	重复精度 (°)	防护等级	重量 (kg)
代码	规格									
NIQ55	3090	10.5	90	1		196		0.05		2.4
	30180		180			196		0.05		2.4
	4090	22	90	1.2		322		0.07		4.36
	40180		180	1.5		322		0.07		4.36
	5090	49.5	90	1.6	3~8	560	5~60	0.07	IP64	9.1
	50180		180	1.8		560		0.07		9.1
	6390	108	90	1.9		990		0.1		26
	63180		180	2.1		990		0.1		26

① 重复精度：连续动作100次后检测值。

② 尺寸表

规格	A	B	C	D	E	F	G	H	V	J	K	L	N	A1	B1	C1	D1	E1	F1	G1	H1	V1	J1	K1	L1
3090	163	16	49	40	39.5	5	6	5	38	12	85	M3	3	30	55	2	52	10	46.5	14	37	100	M12	10.3	18
30180																									
4090	192	17	60	47	46	6	8	6	48	14	115	M4	4	40	68	2.5	63.5	10	57	18	42	120	M14	12.3	20
40180																									
5090	262	20.4	82	60	59	8	10	8	60	18	145	M5	4	52	85	2.5	77	13	70	25	55	150	M16	14.3	24
50180																									
6390	402	20	100	90	89	12	14	12	80	25	180	M6	6	80	110	4	104.5	17	96	30	80	220	M24	21	33
63180																									
规格	N1	O1	P1	A2	B2	C2	D2	E2	F2	G2	H2	V2	J2	A3	B3	C3	D3	E3	F3	G3	H3	V3	J3	K3	
3090	22.3	24	30.5	87.5	4	4	23	4	5	4	M6	10	2	13	6	13	20	M6	8	R5	49	22.3	M5	6	
30180																									
4090	26	28	44	102	5	5	30	5	7	5	M8	14	2.5	16	7.5	17.5	24	M8	12	R5	60	26	G1/8	7	
40180																									
5090	31	25	55	137	8	8	41	8	10	8	M10	15	5	20	8	18	30	M10	15	R5	82	32	G1/8	7	
50180																									
6390	48	48	71	212	10	10	63	10	12	10	M12	24	3.8	25	—	56	25	M12	15	R12.5	100	48	G1/8	7	
63180																									



请按照图示订货 NIQ55—3090

型号	规格
NIQ55	3090
	30180



未税价(元)

优惠价	数量	1~10	11~
	价格	100%	另行报价



交货期
16