


内六角沉头螺钉

| 代码 | 类型 | 螺纹 | 材质 | | 硬度 | 表面处理 | 强度等级 |
|-------|---------|----|--------------|--------|----------|----------|-------|
| | | | 国标 | 相当 | | | |
| TAU01 | 内六角沉头螺钉 | 粗牙 | 35CrMo | SCM435 | 32~39HRC | 发黑 | 10.9 |
| TAU03 | | | — | 10B21 | 37~42HRC | 镀锌 镀镍 | |
| TAU08 | | | 0Cr18Ni9 | SUS304 | — | — | A2-50 |
| TAU02 | | | 0Cr17Ni12Mo2 | SUS316 | — | — | A4-50 |
| TAU05 | | | — | — | — | — | — |
| TAU09 | | | — | — | — | — | — |
| TAU09 | | | — | — | — | — | — |

TAU01



TAU02/05

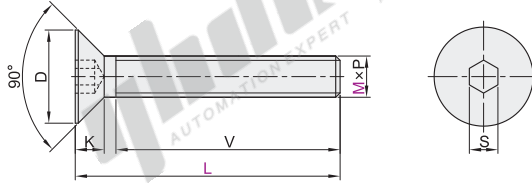

□ 适用标准: DIN 7991-1986

■ SCM435

| 型号 | | L | | | | | | | | | | V | P 螺距 | D (min) | D (max) | K (max) | S (min) | S (max) |
|-------|----|---|------|-------|----|-----|--------|--------|----|-----|-----|---|---------|------------|------------|------------|------------|------------|
| 代码 | M | 2 | 3 | 4 | 5 | 6 | 8 | 10 | 12 | 14 | 16 | | | | | | | |
| TAU01 | 2 | 3 4 5 6 8 10 12 14 16 20 | 0.4 | 3.7 | 4 | 1.3 | 1.32 | 1.36 | 全牙 | 0.5 | 5.7 | 6 | 1.7 | 2.02 | 2.1 | 10.9 | — | — |
| | 3 | 6 8 10 12 16 20 25 30 35 40 45 50 | 0.7 | 7.64 | 8 | 2.3 | 2.52 | 2.6 | | | | | | | | | | |
| | 4 | 6 8 10 12 16 20 25 30 35 40 45 50 | 0.8 | 9.64 | 10 | 2.8 | 3.02 | 3.1 | | | | | | | | | | |
| | 5 | 6 8 10 12 14 16 20 25 30 35 40 45 50 | 1 | 11.57 | 12 | 3.3 | 4.02 | 4.1 | | | | | | | | | | |
| | 6 | 6 8 10 12 16 20 25 30 35 40 45 50 55 60 | 1.25 | 15.57 | 16 | 4.4 | 5.02 | 5.14 | | | | | | | | | | |
| | 8 | 10 12 16 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 100 | 1.5 | 19.48 | 20 | 5.5 | 6.02 | 6.14 | | | | | | | | | | |
| | 10 | 16 20 25 30 35 40 45 50 55 60 65 70 75 80 90 100 | 1.75 | 23.48 | 24 | 6.5 | 8.025 | 8.175 | | | | | | | | | | |
| | 12 | 20 25 30 35 40 45 50 55 60 65 70 75 80 90 100 | 2 | 29.48 | 30 | 7.5 | 10.025 | 10.175 | | | | | | | | | | |
| | 16 | 30 35 40 45 50 55 60 65 70 75 80 90 100 | 2.5 | 35.38 | 36 | 8.5 | 12.032 | 12.212 | | | | | | | | | | |
| | 20 | 40 45 50 55 60 65 70 75 80 90 100 | | | | | | | | | | | | | | | | |

■ 10B21

| 型号 | | L | | | | | | | | | | V | P 螺距 | D (min) | D (max) | K (max) | S (min) | S (max) |
|---------------|-----|--|------|-------|----|-----|--------|--------|----|------|------|---|---------|------------|------------|------------|------------|------------|
| 代码 | M | 3 | 4 | 5 | 6 | 8 | 10 | 12 | 14 | 16 | 20 | | | | | | | |
| TAU03 (镀锌) | 3 | 6 8 10 12 16 20 25 30 | 0.5 | 5.7 | 6 | 1.7 | 2.02 | 2.1 | 全牙 | 0.7 | 7.64 | 8 | 2.3 | 2.52 | 2.6 | 10.9 | — | — |
| | 4 | 6 8 10 12 16 20 25 30 35 | 0.8 | 9.64 | 10 | 2.8 | 3.02 | 3.1 | | | | | | | | | | |
| | 5 | 8 10 12 16 20 25 30 35 40 | 1 | 11.57 | 12 | 3.3 | 4.02 | 4.1 | | | | | | | | | | |
| | 6 | 8 10 12 16 20 25 30 35 40 45 | 1.25 | 15.57 | 16 | 4.4 | 5.02 | 5.14 | | | | | | | | | | |
| | 8 | 10 12 16 20 25 30 35 40 45 50 60 | 1.5 | 19.48 | 20 | 5.5 | 6.02 | 6.14 | | | | | | | | | | |
| TAU08 (镀镍) | 2 | 3 4 5 6 8 10 16 | 0.4 | 3.7 | 4 | 1.3 | 1.32 | 1.36 | 全牙 | 0.45 | 4.7 | 5 | 1.5 | 1.52 | 1.56 | 10.9 | — | — |
| | 2.5 | 5 6 8 10 16 20 | 0.5 | 5.7 | 6 | 1.7 | 2.02 | 2.1 | | | | | | | | | | |
| | 3 | 5 6 8 10 12 16 20 25 30 35 40 45 | 0.7 | 7.64 | 8 | 2.3 | 2.52 | 2.6 | | | | | | | | | | |
| | 4 | 6 8 10 12 16 20 25 30 35 40 45 50 | 0.8 | 9.64 | 10 | 2.8 | 3.02 | 3.1 | | | | | | | | | | |
| | 5 | 6 8 10 12 14 16 20 25 30 35 40 45 50 | 1 | 11.57 | 12 | 3.3 | 4.02 | 4.1 | | | | | | | | | | |
| | 6 | 8 10 12 14 16 20 25 30 35 40 45 50 55 60 | 1.25 | 15.57 | 16 | 4.4 | 5.02 | 5.14 | | | | | | | | | | |
| | 8 | 10 12 14 16 20 25 30 35 40 45 50 55 60 70 80 100 | 1.5 | 19.48 | 20 | 5.5 | 6.02 | 6.14 | | | | | | | | | | |
| | 10 | 16 20 25 30 35 40 45 50 55 60 65 70 80 90 100 | 1.75 | 23.48 | 24 | 6.5 | 8.025 | 8.175 | | | | | | | | | | |
| | 12 | 20 25 30 35 40 45 50 55 60 65 70 75 80 90 100 | 2 | 29.48 | 30 | 7.5 | 10.025 | 10.175 | | | | | | | | | | |
| | 16 | 25 30 35 40 45 50 55 60 65 70 75 80 90 100 | | | | | | | | | | | | | | | | |

■ SUS304


| 型号 | | L | | | | | | | | | | V | P 螺距 | D (min) | D (max) | K (max) | S (min) | S (max) |
|-------|-------------------------------------|-------------------------------------|------|-------|----|-----|------|------|----|------|-----|---|---------|------------|------------|------------|------------|------------|
| 代码 | M | 2 | 3 | 4 | 5 | 6 | 8 | 10 | 12 | 16 | 20 | | | | | | | |
| TAU02 | 2 | 5 6 8 10 12 16 | 0.4 | 3.7 | 4 | 1.3 | 1.32 | 1.36 | 全牙 | 0.45 | 4.7 | 5 | 1.5 | 1.52 | 1.56 | 10.9 | — | — |
| | 2.5 | 5 6 8 10 16 | 0.5 | 5.7 | 6 | 1.7 | 2.02 | 2.1 | | | | | | | | | | |
| | 3 | 6 8 10 12 16 20 25 30 35 | 0.7 | 7.64 | 8 | 2.3 | 2.52 | 2.6 | | | | | | | | | | |
| | 4 | 6 8 10 12 16 18 20 25 30 35 | 0.8 | 9.64 | 10 | 2.8 | 3.02 | 3.1 | | | | | | | | | | |
| | 5 | 8 10 12 14 16 20 25 30 35 40 | 1 | 11.57 | 12 | 3.3 | 4.02 | 4.1 | | | | | | | | | | |
| | 6 | 8 10 12 14 16 20 25 30 35 40 45 | 1.25 | 15.57 | 16 | 4.4 | 5.02 | 5.14 | | | | | | | | | | |
| | 8 | 10 12 14 16 20 25 30 35 40 45 50 60 | 1.5 | 19.48 | 20 | 5.5 | 6.02 | 6.14 | | | | | | | | | | |
| 10 | 16 20 25 30 35 40 45 50 55 60 65 70 | | | | | | | | | | | | | | | | | |

■ SUS316

| 型号 | | L | | | | | | | | | | V | P 螺距 | D (min) | D (max) | K (max) | S (min) | S (max) |
|-------|-------------------------|----------------------------------|------|-------|----|-----|------|------|----|-----|-----|---|---------|------------|------------|------------|------------|------------|
| 代码 | M | 2.5 | 3 | 4 | 5 | 6 | 8 | 10 | 12 | 16 | 20 | | | | | | | |
| TAU05 | 2.5 | 10 12 | 0.45 | 4.7 | 5 | 1.5 | 1.52 | 1.56 | 全牙 | 0.5 | 5.7 | 6 | 1.7 | 2.02 | 2.1 | 10.9 | — | — |
| | 3 | 6 8 10 12 16 20 25 30 | 0.7 | 7.64 | 8 | 2.3 | 2.52 | 2.6 | | | | | | | | | | |
| | 4 | 6 8 10 12 16 20 25 30 35 | 0.8 | 9.64 | 10 | 2.8 | 3.02 | 3.1 | | | | | | | | | | |
| | 5 | 8 10 12 14 16 20 25 30 35 40 | 1 | 11.57 | 12 | 3.3 | 4.02 | 4.1 | | | | | | | | | | |
| | 6 | 8 10 12 14 16 20 25 30 35 40 45 | 1.25 | 15.57 | 16 | 4.4 | 5.02 | 5.14 | | | | | | | | | | |
| | 8 | 10 12 14 16 20 25 30 35 40 45 50 | 1.5 | 19.48 | 20 | 5.5 | 6.02 | 6.14 | | | | | | | | | | |
| 10 | 16 20 25 30 35 40 45 50 | | | | | | | | | | | | | | | | | |

■ 黄铜

| 型号 | | L | | | | | | | | | | V | P 螺距 | D (min) | D (max) | K (max) | S (min) | S (max) |
|-------|----|-------------------|-----|-------|----|-----|------|------|----|------|-------|----|---------|------------|------------|------------|------------|------------|
| 代码 | M | 6 | 8 | 10 | 12 | 14 | 16 | 20 | 25 | 30 | 35 | | | | | | | |
| TAU09 | 6 | 12 16 20 25 30 | 1 | 11.57 | 12 | 3.3 | 4.02 | 4.1 | 全牙 | 1.25 | 15.57 | 16 | 5.5 | 5.02 | 5.14 | 10.9 | — | — |
| | 8 | 20 25 30 35 40 | 1.5 | 19.48 | 20 | 4.4 | 6.02 | 6.14 | | | | | | | | | | |
| | 10 | 20 25 30 35 40 45 | | | | | | | | | | | | | | | | |



请按图示订货

| 型号 | | L | | | | | | | | | | | | | | | | |
|-------|---|-----------------|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|
| 代码 | M | 3 | 4 | 5 | 6 | 8 | 10 | 12 | 14 | 16 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 60 |
| TAU01 | 4 | 6 8 10 12 16 | | | | | | | | | | | | | | | | |
| TAU01 | 5 | 6 8 10 12 14 16 | | | | | | | | | | | | | | | | |

TAU01—M4—L16

优惠价
数量 1~49 50~
价格 100% 另行报价
未税价(元)

交货期
3

□ 内六角沉头螺钉大多用在需要安装后, 零件的表面不能有凹起的地方;
□ 常用于机械上, 主要有便于紧固, 拆卸, 不容易滑角等优势。

垫圈·吊环
螺母·螺帽

C2