


代码	类型	涂装剥离处理	材质	最大压缩量
E-YSWR	高压缩量 经济型	有涂装	油冷回火弹簧钢	L×50%

● L尺寸公差

L	公差
<50	±0.75
≥50	±1.5%



- ① 载荷(±15%)
- ② 直角度(2°以下)
- ③ 负载=弹簧常数(N/mm)×压缩量
- ④ 负载测得是在常温条件下
- ⑤ 1kgf=9.81N
- ⑥ 压紧长度为参考值, 加工时会有少许差异
- ⑦ 弹簧颜色和圈数可能会因生产批次不同而异, 但产品性能均符合标准, 不影响使用!

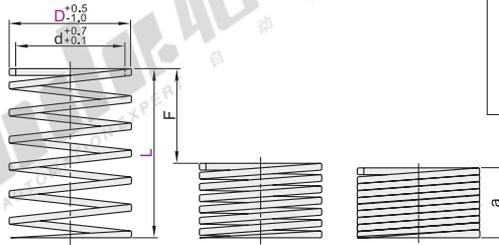

视图标准: 第一视角

E-YSWR					E-YSWR					E-YSWR								
型号	内径	弹簧常数	a	使用方法	型号	内径	弹簧常数	a	使用方法	型号	内径	弹簧常数	a	使用方法				
代码	D	L	d	F=L×50%	代码	D	L	d	F=L×50%	代码	D	L	d	F=L×50%				
E-YSWR	10.5	6	78.5	15	10.46	6	7.5	15	2.84	36	45	25	31.38	10	12.5			
				20	7.84	8	10	14.5	100	8.5	2.54	40	50	30	26.18	12	15	
				25	6.27	10	12.5	125	2.05	50	62.5	35	22.45	14	17.5			
				30	5.19	12	15	150	1.7	60	75	40	19.61	16	20			
				35	4.5	14	17.5	20	19.61	8	10	45	17.45	18	22.5			
				40	3.92	16	20	25	15.69	10	12.5	50	15.69	20	25			
				45	3.53	18	22.5	30	13.04	12	15	55	14.21	22	27.5			
				50	3.14	20	25	35	11.17	14	17.5	60	13.04	24	30			
				55	2.84	22	27.5	40	9.8	16	20	65	12.06	26	32.5			
				60	2.65	24	30	45	8.72	18	22.5	70	11.17	28	35			
E-YSWR	12.5	7	88.2	15	11.77	6	7.5	17	6.08	26	32.5	26	75	10.49	30	37.5		
				20	8.82	8	10	70	5.58	28	35	75	9.8	32	40			
				25	7.06	10	12.5	75	5.19	30	37.5	80	9.8	32	40			
				30	5.88	12	15	80	4.9	32	40	80	8.72	36	45			
				35	5.04	14	17.5	90	4.31	36	45	90	7.84	40	50			
				40	4.41	16	20	100	3.92	40	50	100	7.15	44	55			
				45	3.92	18	22.5	105	3.53	45	56.25	110	6.57	48	60			
				50	3.2	20	27.5	110	3.13	50	62.5	115	6.27	50	62.5			
				55	2.94	24	30	115	2.64	60	75	120	6.08	52	65			
				60	2.71	26	32.5	120	2.24	70	87.5	125	5.58	56	70			
E-YSWR	14.5	8.5	127.5	15	17	6	7.5	175	2.24	70	87.5	130	5.58	56	70			
				20	12.7	8	10	25	23.54	10	12.5	140	5.19	60	75			
				25	10.19	10	12.5	30	19.61	12	15	150	5.19	60	75			
				30	8.53	12	15	35	16.76	14	17.5	160	4.51	70	87.5			
				35	7.25	14	17.5	40	14.7	16	20	170	4.51	70	87.5			
				40	6.37	16	20	45	13.04	18	22.5	180	4.31	36	45			
				45	5.68	18	22.5	50	11.76	20	25	190	4.31	36	45			
				50	5.09	20	25	55	10.68	22	27.5	200	4.1	36	45			
				55	4.6	22	27.5	60	9.8	24	30	210	3.92	40	50			
				60	4.21	24	30	65	9.02	26	32.5	220	3.92	40	50			
E-YSWR	17	10.5	196.1	15	17	6	7.5	70	8.43	28	35	230	3.49	90	112.5			
				20	12.7	8	10	75	7.84	30	37.5	240	3.49	90	112.5			
				25	10.19	10	12.5	80	7.35	32	40	250	3.14	100	125			
				30	8.53	12	15	85	6.76	34	42.5	260	3.14	100	125			
				35	7.25	14	17.5	90	6.27	36	45	270	2.94	110	137.5			
				40	6.37	16	20	95	5.88	38	47.5	280	2.94	110	137.5			
				45	5.68	18	22.5	100	5.39	40	50	290	2.94	110	137.5			
				50	5.09	20	25	105	4.9	42	52.5	300	2.94	110	137.5			
				55	4.6	22	27.5	110	4.41	44	55	310	2.94	110	137.5			
				60	4.21	24	30	115	4.02	46	57.5	320	2.94	110	137.5			
E-YSWR	21	13.5	294.1	15	17	6	7.5	120	4.9	48	60	43	225	31	7.41	90	112.5	
				20	12.7	8	10	125	4.7	50	62.5	46	80	33	26.96	32	40	1079
				25	10.19	10	12.5	130	4.51	52	65							
				30	8.53	12	15	135	4.31	54	67.5							
				35	7.25	14	17.5	140	4.1	56	70							
				40	6.37	16	20	145	3.92	58	72.5							
				45	5.68	18	22.5	150	3.73	60	75							
				50	5.09	20	25	155	3.54	62	77.5							
				55	4.6	22	27.5	160	3.36	64	80							
				60	4.21	24	30	165	3.18	66	82.5							

请按图示订货

型号	内径
E-YSWR	6
E-YSWR-D10.5-L15	

未税价(元)

数量	价格
1~4	100%
5~	另行报价

交货期 3