




X轴·直线导轨式

滚珠丝杠传动 底座宽度145/195 中精度

电动位移台

代码	传动方向	传动方式	精度	主体		导轨	丝杆
				材质	表面处理	材质	材质
EHU01	X轴	滚珠丝杠	中精度	铝合金	黑色阳极氧化	合金钢	SUS303



① 产品不含电机，电机需另行选购。

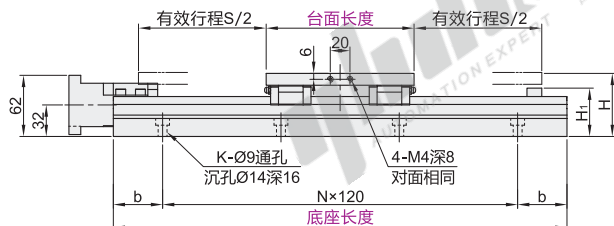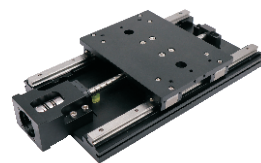

A处放大图

□ C尺寸表

台面长度	C
100	50
150	100
200	150

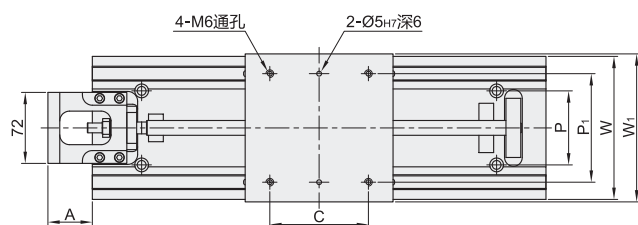

视角标准：第一视角

型号		底座 长度	台面 长度	S	底座 宽度 W	台面 宽度 W ₁	P	P ₁	A	M	H	H ₁	N	K	b	P.C.D	重复 定位 精度	平行度	水平 负载 (kg)	垂直 负载 (kg)	最高 速度 (mm/s)	重量 (kg)	
代码	丝杠 轴径																						导程
EHU01	4	12	340	130									2	6	50			±0.03	0.06			265	5.3
			400	190										80			0.07				5.9		
			460	250									3	8	50			0.08				6.4	
			520	310										80			0.09				7		
			580	370									4	10	50			0.1				7.5	
			640	430										80			0.12				8.1		
		10	340	130						37	M4	55	44	2	6	50	46		0.06		138		5.3
			400	190											80			0.07				5.9	
			460	250										3	8	50			0.08				6.4
			520	310											80			0.09				7	
			580	370										4	10	50		±0.05	0.1			651	7.5
			640	430											80			0.12				8.1	
	5	100	700	490										5	12	50			0.13				8.6
			760	550											80			0.14				9.2	
			340	130										2	6	50			0.06				6.5
			400	190											80			0.07				7.2	
			460	250										3	8	50			0.08				7.8
			520	310											80			0.09				8.5	
		150	580	370										4	10	50		±0.05	0.1			264	9.2
			640	430											80			0.12				9.9	
			700	490	145	150	75	110						5	12	50			0.13	1679			10.6
			760	550											80			0.14				11.3	
			820	610										6	14	50			0.15				11.9
			340	130										2	6	50			0.06				6.5
	10	15	400	190											80			0.07				7.2	
			460	250										3	8	50			0.08				7.8
			520	310											80			0.09				8.5	
			580	370										4	10	50	70	±0.05	0.1		153	527	9.2
			640	430											80			0.12				9.9	
			700	490										5	12	50			0.13				10.6
		20	760	550											80			0.14				11.3	
			820	610										6	14	50			0.15				11.9
			340	130										2	6	50			0.06				6.5
			400	190											80			0.07				7.2	
			460	250										3	8	50			0.08				7.8
			520	310											80			0.09				8.5	
	20	580	370											4	10	50		±0.05	0.1			1055	9.2
		640	430												80			0.12				9.9	
		700	490										5	12	50			0.13				10.6	
		760	550											80			0.14				11.3		
		820	610										6	14	50			0.15				11.9	

电动位移台

X轴·直线导轨式

滚珠丝杠传动 底座宽度145/195 中精度

型号			底座长度	台面长度	S	底座宽度 W	台面宽度 W ₁	P	P ₁	A	M	H	H ₁	N	K	b	P.C.D	重复定位精度	平行度	水平负载 (kg)	垂直负载 (kg)	最高速度 (mm/s)	重量 (kg)
EHU01	20	5	340		130									2	6	50			0.06				11.4
			400		190											20			0.07				12.5
			460		250									3	8	50			0.08				13.6
			520		310											20			0.09				14.7
			580		370							68		4	10	50		±0.05	0.1			200	15.8
			640		430											20			0.12				16.9
		10	700		490									5	12	50			0.13				18
			760		550											20			0.14				19.1
			820		610									6	14	50			0.15				20.2
			400		190											20			0.07				12.5
			460		250									3	8	50			0.08				13.6
	20	10	520	150	310	195	200	120	150	57.5	M8		50	4	10	20	70		0.09	4345	169		14.7
			580	200	370											50		±0.08	0.1			397	15.8
			640		430									5	12	20			0.12				16.9
			700		490											50			0.13				18
			760		550									6	14	20			0.14				19.1
			820		610							79				50			0.15				20.2
		20	460		250									3	8	50			0.08				13.6
			520		310											20			0.09				14.7
			580		370									4	10	50			0.1				15.8
			640		430											20		±0.05	0.12			801	16.9
			700		490									5	12	50			0.13				18
			760		550											20			0.14				19.1
			820		610									6	14	50			0.15				20.2



请按图示订货

型号			底座长度	台面长度
代码	丝杠轴径	导程		
EHU01	12	4	340	150
	12	4	400	200

EHU01—12—4—400—100



未税价(元)

● 优惠价

数量	1~20	21~
价格	100%	另行报价



交货期

15