

电动位移台




X轴·直线导轨式

滚珠丝杠传动 底座宽度145/195 中精度



电动位移台

代码	传动方向	传动方式	精度	主体		导轨	丝杆
				材质	表面处理	材质	材质
EHU01	X轴	滚珠丝杠	中精度	铝合金	黑色阳极氧化	合金钢	SUS303

① 产品不含电机，电机需另行选购。

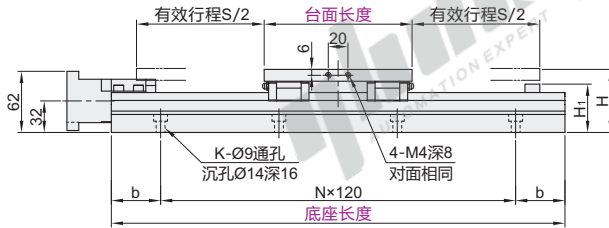

A处放大图

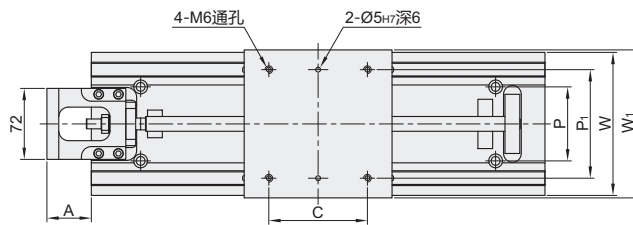

□ C尺寸表

台面长度	C
100	50
150	100
200	150

视角标准：第一视角

型号	底座	台面	S	底座	台面	P	P ₁	A	M	H	H ₁	N	K	b	P.C.D	重复	平行度	水平	垂直	最高	重量
代码	丝杠 轴径	长度	长度	宽度 W	宽度 W ₁											定位 精度		负载 (kg)	负载 (kg)	速度 (mm/s)	(kg)
EHU01	4	340	130											50		±0.03	0.06				5.3
		400	190									2	6	80			0.07				5.9
		460	250											50			0.08				6.4
		520	310									3	8	80			0.09			265	7
		580	370											50			0.1				7.5
		640	430									4	10	80			0.12				8.1
	12	340	130						M4	55	44	2	6	50	46		0.06				5.3
		400	190											80			0.07				5.9
		460	250									3	8	50			0.08				6.4
		520	310											80			0.09				7
		580	370									4	10	50			0.1				7.5
		640	430											80			0.12				8.1
	10	700	490									5	12	50			0.13				8.6
		760	550											80			0.14				9.2
		340	130									2	6	50			0.06				6.5
		400	190											80			0.07				7.2
		460	250									3	8	50			0.08				7.8
		520	310											80			0.09				8.5
	5	580	370									4	10	50			0.1				9.2
		640	430											80			0.12			264	9.9
		700	490			145	150	75	110	45		5	12	50			0.13	1679			10.6
		760	550									6	14	50			0.14				11.3
		820	610											80			0.15				11.9
		340	130									2	6	50			0.06				6.5
	15	400	190											80			0.07				7.2
		460	250									3	8	50			0.08				7.8
		520	310											80			0.09				8.5
		580	370						M5	64	50	4	10	50	70		0.1				9.2
		640	430											80			0.12				9.9
		700	490									5	12	50			0.13				10.6
	20	760	550											80			0.14				11.3
		820	610									6	14	50			0.15				11.9
		340	130									2	6	50			0.06				6.5
		400	190											80			0.07				7.2
		460	250									3	8	50			0.08				7.8
		520	310											80			0.09				8.5
		580	370									4	10	50			0.1			1055	9.2
		640	430											80			0.12				9.9
		700	490									5	12	50			0.13				10.6
		760	550											80			0.14				11.3
		820	610									6	14	50			0.15				11.9

X轴·直线导轨式

滚珠丝杠传动 底座宽度145/195 中精度

电动位移台

电动位移台

型号		底座长度	台面长度	S	底座宽度 W	台面宽度 W ₁	P	P ₁	A	M	H	H ₁	N	K	b	P.C.D	重复定位精度	平行度	水平负载 (kg)	垂直负载 (kg)	最高速度 (mm/s)	重量 (kg)
EHU01	20	340		130									2	6	50			0.06				11.4
		400		190											20			0.07				12.5
		460		250									3	8	50			0.08				13.6
		520		310											20			0.09				14.7
		580		370							68		4	10	50		±0.05	0.1			200	15.8
		640		430									5	12	20			0.12				16.9
		700		490											50			0.13				18
		760		550									6	14	20			0.14				19.1
		820		610											50			0.15				20.2
		400		190									3	8	20			0.07				12.5
		460		250											50			0.08				13.6
	10	520	150	310	195	200	120	150	57.5	M8		50	4	10	20	70		0.09	4345	169		14.7
		580	200	370											50		±0.08	0.1			397	15.8
		640		430									5	12	20			0.12				16.9
		700		490											50			0.13				18
		760		550									6	14	20			0.14				19.1
		820		610							79				50			0.15				20.2
	20	460		250									3	8	50			0.08				13.6
		520		310											20			0.09				14.7
		580		370									4	10	50			0.1				15.8
		640		430									5	12	20		±0.05	0.12			801	16.9
		700		490											50			0.13				18
		760		550									6	14	20			0.14				19.1
		820		610											50			0.15				20.2



请按图示订货

型号			底座长度	台面长度
代码	丝杠轴径	导程		
EHU01	12	4	340	150
	12	4	400	150

EHU01—12—4—400—100



未税价(元)

● 优惠价

数量	1~20	21~
价格	100%	另行报价



交货期

15

怡合达®
AUTOMATION EXPERT 自动化专家