



带挡圈槽型 法兰型

悬臂销

代码	材质	表面处理
圆法兰型	对边法兰型	国标
MGJ01	MGJ11	45
MGJ02	MGJ12	S45C
MGJ06	MGJ13	0Cr18Ni9
		SUS304
		发黑
		无电解镀镍
		—

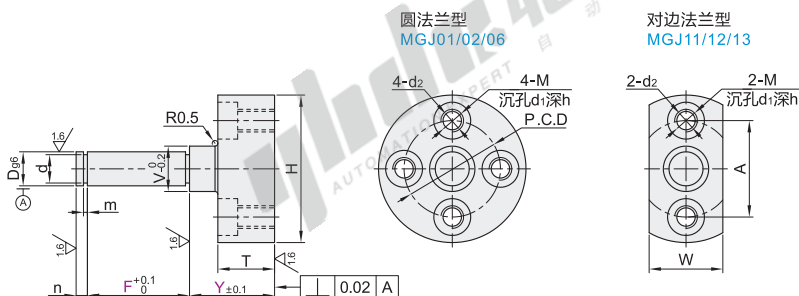

① 工艺孔加工条件：D段长度除以Y尺寸值<2；4≤D≤11且总长度≥70；11<D≤18且总长度≥90；D>18且总长度≥110。（工艺孔详细尺寸见产品简介）



型号		Dg6		最小单位1		V	H	T	M	d ₁	d ₂	h	P.C.D	d	m	n					
代码	规格			Y	F																
圆法兰型 MGJ01 MGJ02 MGJ06	6	6	-0.004 -0.012	5~110	8	26	10	M4	6.5	3.5	3.5	17	5	+0.075 0	0.7	2					
	6A				32	23															
	8	8			28	19															
	8A				36	26															
	10	10	-0.005 -0.014		32	23															
	10A			12~65	13	40	M4	6.5	3.5	3.5	30	9.6	0 -0.09			3					
	12	12			15	36					26	11.5									
	13	13			16	38					27	12.4									
	15	15	-0.006 -0.017		18	40					M5	8	4.3				4.4	30	14.3	0 -0.11	1.15
	16	16			19	42												31	15.2		
	17	17		20	44	32	16.2														
	18	18		10~160	21	46					34	17				4					
	20	20			24	48					36	19									
	22	22	-0.007 -0.020		26	50	M6	9.5	5.2	5.4	39	21					0 -0.21	1.35			
	25	25			29	54					42	23.9									
	30	30			34	62					49	28.6									
	35	35			20~80	39	70	15	M8	11	6.8	6.5					55	33	1.65	5	
	40	40	-0.009 -0.025			44	80										63	38			0 -0.25
	50	50		54		90	M10						14	8.6	9	73	47	2.2			

型号		Dg6		最小单位1		V	H	T	M	d ₁	d ₂	h	d	m	n	W	A	
代码	规格			Y	F													
对边法兰型 MGJ11 MGJ12 MGJ13	6	6	-0.004 -0.012	5~110	F	8	26	10	M4	6.5	3.5	3.5	5	+0.075 0	0.7	2	13	17
	8	8	-0.005 -0.014			10	28						7	+0.09 0	0.9	3	14	19
	10	10				13	32						9.6	-0.09			15	23
	12	12				15	36						11.5				19	26
	13	13	12~65			16	38	15	12.4			21	27					
	15	15				18	40		14.3			23	30					
	16	16				-0.006 -0.017	19		42	15.2	0 -0.11		4	24	31			
	17	17				20	44		16.2			27	32					
	18	18	10~160			21	46	17				30	34					
	20	20				24	48		19			1.35		31	36			
	22	22				26	50		21	0 -0.21			33	39				
	25	25				-0.007 -0.020	29		54		23.9			37	42			
	30	30	17~80			34	62	15	28.6				41	49				
	35	35				39	70		33				1.65	5	49	55		
	40	40				-0.009 -0.025	44		80	M10	14	8.6	9	38	0 -0.25	1.9	55	63
	50	50				54	90		47					2.2		69	73	



代码	技术说明
YC	变更Y尺寸公差 选型方法 YC ① 变更Y尺寸公差为±0.04
AD	增加引导部 选型方法 AD ① 在如左图所示位置增加引导部 D ADg6 6 8 8~30 10 35~50 12
ME	附带挡圈 选型方法 ME ① 规格6~8A:E形挡圈 规格10~50:C形挡圈



型号	规格	Dg6	最小单位1
代码	规格	Y	F
MGJ01	6	1C-B5	5<1D0
MGJ02	8	1C-B5	5<1D0

MGJ01—6—Y20—F15

② 可选加工

型号	规格	Dg6	最小单位1	可选加工代码
代码	规格	Y	F	
MGJ01	6	1C-B5	5<1D0	YC AD ME
MGJ02	8	1C-B5	5<1D0	YC AD ME

MGJ01—6—Y20—F15—YC



数量	1~9	10~
价格	100%	另行报价

未税价(元)



3

① 无表面处理



5

① 有表面处理

悬臂销

A5