


代码	材质	表面处理
AOB02	A6063-T6	碱砂氧化
AOH02	A6005-T6	碱砂氧化
AOB03	A6063-T5	黑色氧化

① 切断面未进行氧化处理。


② 最大使用长度：5800~5850mm；

整条标准长度：6000~6020mm。

③ 可定制表面处理。






■ L长度公差




(当L > 1000mm时，长度尺寸公差±0.5)

■ 槽口详图




I局部放大图


AOB02-H4545
AOB03-H4545




AOH02-4545




AOB02-H4545C




AOB02-H4560




AOB02-H4590
AOB03-H4590




AOH02-4590




AOB02-H4590C

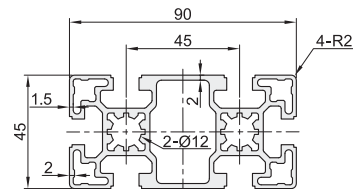


AOB02-H9090
AOB03-H9090

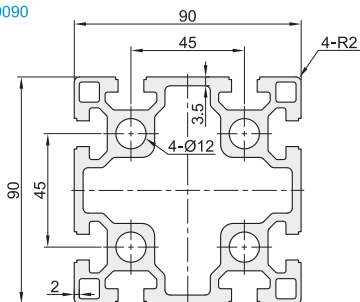

AOB02-H9090C

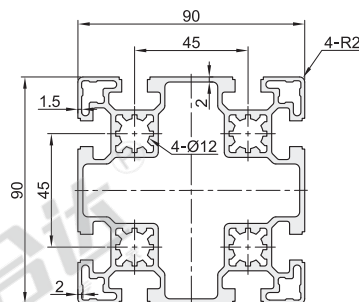

AOB02-H45180

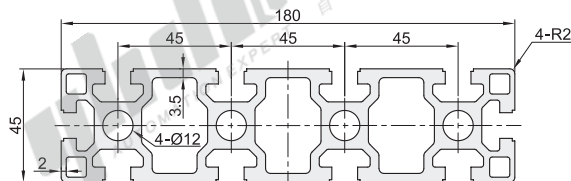

视角标准：第一视角

型号		L 最小单位0.5	截面尺寸	每米重量Kg/m (理论值)	截面积 (mm²)	截面惯性矩		抗弯截面模数	
代码	规格					Ix	Iy	Wxmax (mm³)	Wymax (mm³)
AOB02	H4545		45×45	2.35	852.55	16.30×10⁴	16.30×10⁴	7244.27	7244.27
	H4545C			1.76	638.05	12.07×10⁴	12.07×10⁴	5362.40	5362.40
	H4560		45×60	2.34	850.26	15.99×10⁴	27.30×10⁴	7103.33	9098.00
	H4590			4.28	1556.95	32.26×10⁴	120.53×10⁴	14335.78	26783.56
	H4590C	50~6000	45×90	3.14	1139.72	24.06×10⁴	89.26×10⁴	10695.24	19834.58
	H9090			6.78	2465.69	220.11×10⁴	220.11×10⁴	48913.64	48913.64
	H9090C		90×90	5.01	1821.58	163.00×10⁴	163.00×10⁴	36221.87	36221.87
	H45180			8.14	2957.60	64.54×10⁴	877.03×10⁴	28683.51	97447.49
AOH02	4545		45×45	3.15	1146.22	23.19×10⁴	23.19×10⁴	10305.44	10305.44
	4590		45×90	5.13	1867.07	42.00×10⁴	159.52×10⁴	18667.77	35449.16
AOB03	H4545		45×45	2.35	852.55	16.30×10⁴	16.30×10⁴	7244.27	7244.27
	H4590		45×90	4.28	1556.95	32.26×10⁴	120.53×10⁴	14335.78	26783.56
	H9090		90×90	6.78	2465.69	220.11×10⁴	220.11×10⁴	48913.64	48913.64



请按图示订货

型号		L 最小单位0.5	截面尺寸
代码	规格		
AOB02	H9090	50~6000	90×90
AOB02	H9090C		

AOB02—H9090C—L630

❑ 可选加工


型号		L 最小单位0.5	可选加工代码
代码	规格		
AOB02	H9090	50~6000	LM/RM/DM
AOB02	H9090C		

AOB02—H9090C—L630—RM



可选加工

❑ 端面螺孔加工

代码	技术说明
	变更通孔为螺孔
	选型方法 LM/RM/DM
	
❶ Ø12通孔变更为螺孔M14深36。	

❶ 可选加工见P603~608。