


防水型 圆形连接器

中继公插头 WF系列 威浦品牌

WEIFU 威浦电器



系列	类型	接插方式	材质			防护等级
			外壳	绝缘体	接触体	
WF系列	中继公插头	螺纹连接	锌合金 (镀铬)	热塑塑料PPS (耐高温260°C)	铜 (镀金)	IP65

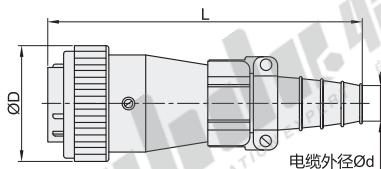


插座与面板 配合直径	16	20	24	28
ØD	21.5	26.4	29.8	34
L	72.3	86.9	92.5	100.6
Ød	7~8	8~10.5	8~10.5	11.5~13.6


单位: mm

孔位排列图(从针的方向看)


WF16系列





WF20系列



WF24系列



WF28系列



视角标准: 第一视角

代码	插座与面板 配合直径	芯数	接插件种类	接线方式	出线方式	适配插孔类型		
						直通母插头	面板安装方型母插座	面板安装螺母型母插座
WF16J2TI	16	2	插针	焊接	电缆护套	WF16K2ZIB	WF16K2Z	WF16K2ZM
WF16J3TI		3				WF16K3ZIB	WF16K3Z	WF16K3ZM
WF16J4TI		4				WF16K4ZIB	WF16K4Z	WF16K4ZM
WF16J5TI		5				WF16K5ZIB	WF16K5Z	WF16K5ZM
WF16J7TI		7				WF16K7ZIB	WF16K7Z	WF16K7ZM
WF16J9TI		9				WF16K9ZIB	WF16K9Z	WF16K9ZM
WF16J10TI		10				WF16K10ZIB	WF16K10Z	WF16K10ZM
WF20J2TI	20	2				WF20K2ZIB	WF20K2Z	WF20K2ZM
WF20J3TI		3				WF20K3ZIB	WF20K3Z	WF20K3ZM
WF20J4TI		4				WF20K4ZIB	WF20K4Z	WF20K4ZM
WF20J5TI		5				WF20K5ZIB	WF20K5Z	WF20K5ZM
WF20J7TI		7				WF20K7ZIB	WF20K7Z	WF20K7ZM
WF20J9TI		9				WF20K9ZIB	WF20K9Z	WF20K9ZM
WF20J12TI		12				WF20K12ZIB	WF20K12Z	WF20K12ZM
WF24J2TI	24	2				WF24K2ZIB	WF24K2Z	WF24K2ZM
WF24J3TI		3				WF24K3ZIB	WF24K3Z	WF24K3ZM
WF24J4TI		4				WF24K4ZIB	WF24K4Z	WF24K4ZM
WF24J9TI		9				WF24K9ZIB	WF24K9Z	WF24K9ZM
WF24J10TI		10				WF24K10ZIB	WF24K10Z	WF24K10ZM
WF24J12TI		12				WF24K12ZIB	WF24K12Z	WF24K12ZM
WF24J19TI		19				WF24K19ZIB	WF24K19Z	WF24K19ZM
WF28J3TI	28	3				WF28K3ZIB	WF28K3Z	WF28K3ZM
WF28J4TI		4				WF28K4ZIB	WF28K4Z	WF28K4ZM
WF28J7TI		7				WF28K7ZIB	WF28K7Z	WF28K7ZM
WF28J8TI		8				WF28K8ZIB	WF28K8Z	WF28K8ZM
WF28J10TI		10				WF28K10ZIB	WF28K10Z	WF28K10ZM
WF28J12TI		12				WF28K12ZIB	WF28K12Z	WF28K12ZM
WF28J16TI		16				WF28K16ZIB	WF28K16Z	WF28K16ZM
WF28J20TI		20				WF28K20ZIB	WF28K20Z	WF28K20ZM
WF28J24TI		24				WF28K24ZIB	WF28K24Z	WF28K24ZM
WF28J26TI		26				WF28K26ZIB	WF28K26Z	WF28K26ZM

① 适配插孔: 直通母插头详见P569, 面板安装方型母插座详见P570, 面板安装螺母型母插座详见P571.

电气技术特性

WF16系列

芯数	2	3	4	5	7	9	10
额定电流(A)	10						
接触件直径	Ø1.5x2	Ø1.5x3	Ø1x4	Ø1x5	Ø1x7	Ø1x9	Ø1x10
工作电压(V)	500			400			
耐压(V)	1500			1200			
接触电阻(mΩ)	2.5			5			
线规(mm²/AWG)	≤2/14			≤0.75/18			

WF20系列

芯数	2	3	4	5	7	9	12
额定电流(A)	25		10		5		
接触件直径	Ø2.5x2	Ø2.5x3	Ø2.5x4	Ø1.5x5	Ø1.5x7	Ø1x9	Ø1x12
工作电压(V)	500			400			
耐压(V)	1500			1200			
接触电阻(mΩ)	1			2.5		5	
线规(mm²/AWG)	≤4/11			≤2/14		≤0.75/18	

WF24系列

芯数	2	3	4	9	10	12	19
额定电流(A)	25		5.25		10		5
接触件直径	Ø2.5x2	Ø2.5x3	Ø2.5x4	Ø1x5	Ø2.5x4	Ø1.5x10	Ø1.5x12
工作电压(V)	500			400			
耐压(V)	1500			1200			
接触电阻(mΩ)	1			5.1		2.5	5
线规(mm²/AWG)	≤4/11			≤0.75/18, 5.4/11		≤2/14	≤0.75/18

WF28系列

芯数	3	4	7	8	10	12	16	20	24	26
额定电流(A)	50		25		10		5			
接触件直径	Ø3.5x3	Ø2.5x4	Ø2.5x7	Ø2.5x8	Ø2.5x10	Ø1.5x12	Ø1.5x16	Ø1x20	Ø1x24	Ø1x26
工作电压(V)	500							400		
耐压(V)	1500							1200		
接触电阻(mΩ)	0.5		1		2.5		5			
线规(mm²/AWG)	≤10/7		≤4/11		≤2/14		≤0.75/18			

技术参数

接插方式	螺纹连接
接线方式	焊接: Ø1, Ø2.5, Ø3.5, Ø5.5
接插次数	500
温度范围	-40°C ~ +85°C
绝缘电阻	2000MΩ



请按图订交货

代码
WF16J2TI
WF16J3TI
WF16J2TI