



定位销

内螺纹型 · P尺寸选择型 小头锥角型

P尺寸选择型 圆型	材质		硬度
	国标	相当	
YCY12	9CrWMn	SKS3	淬火硬度58-61HRC
YCY15	0Cr18Ni9	SUS304	—
YCY17	9Cr18Mo	SUS440C	淬火硬度48-53HRC

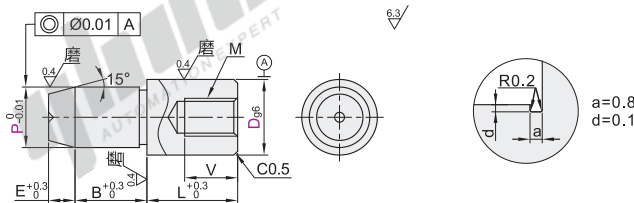

型号		Dg6	P	L	B	E	M	V
代码								
YCY12	6	-0.004 -0.012	4 5	10	5	2	M3	5
YCY15	8	-0.005 -0.014	6 7	15	6	3	M5	8
YCY17	10	-0.006 -0.017	7 8 9 10					
	12		8 9 10 11 12		8			



代码	型号	Dg6	P
YCY12	6	4 5	
YCY15	8	6 7	

请按图示订货

YCY12-D6-P5

可选加工

代码	型号	Dg6	P	可选加工代码
YCY12	6	4 5		RC EC()
YCY15	8	6 7		

YCY12-D6-P5-EC4



数量	1-4	5~
价格	100%	另行报价

未税价(元)



交货期
7



可选加工

代码	技术说明	代码	技术说明										
RC	<p>变更颈部退刀槽为R0.5</p> <p>选型方法 RC ① D-P < 2 不适用</p>	EC()	<p>变更前端锥角部长度 变更E尺寸</p> <p>选型方法 EC4 ① 最小单位1 ② 圆锥小头直径1min ③ B尺寸因EC的变化而变化</p> <table border="1"> <thead> <tr> <th>D</th> <th>EC</th> </tr> </thead> <tbody> <tr> <td>6</td> <td>3~9</td> </tr> <tr> <td>8</td> <td>4~13</td> </tr> <tr> <td>10</td> <td>4~16</td> </tr> <tr> <td>12</td> <td>4~20</td> </tr> </tbody> </table>	D	EC	6	3~9	8	4~13	10	4~16	12	4~20
D	EC												
6	3~9												
8	4~13												
10	4~16												
12	4~20												

