

两端内螺纹型 · 带扳手槽型 一端台阶型



转轴

代码	类型	公差		材质		表面处理
		D	P	国标	相当	
MBK11	两端 内螺纹型 带扳手槽型	g6	g6	45	S45C	发黑
MBK12				0Cr18Ni9	SUS304	无电解镀镍
MBK26				45	S45C	发黑
MBK51		h7	h7	45	S45C	发黑
MBK56				0Cr18Ni9	SUS304	—
MBK91				45	S45C	发黑
MBK92		h9	h7	45	S45C	无电解镀镍
MBK96				0Cr18Ni9	SUS304	—



RoHS

D-P	g6	h7	h9
3.1~6	-0.004 -0.012	0 -0.012	0 -0.030
6.1~10	-0.005 -0.014	0 -0.015	0 -0.036
10.1~18	0 -0.017	0 -0.018	0 -0.043
18.1~30	-0.007 -0.020	0 -0.021	0 -0.052
30.1~50	-0.009 -0.025	0 -0.025	0 -0.062

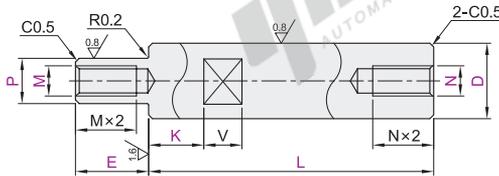

① 圆度·直线度·垂直度·同轴度，请参阅转轴产品简介。



g6

型号	最小单位0.1	最小单位1	M		N		K	W	V
代码	D _{g6}	L	E	P	M	N	最小单位1	W	V
MBK11 MBK12 MBK26	6	18-300	M3-M8时	5	3	3	K=0或 K≥1	5	10
	8	18-400		3 4 5	3 4 5 6	7			
	10	18-500		4 5 6	4 5 6	8			
	12	25-600	M2≤P<D	5 6 8	5 6 8	10	12	14	16
	13	25-700		5 6 8	5 6 8	11			
	15	25-700	M10-M16时	5 6 8 10	5 6 8 10	13	16	18	20
	16	35-600		5 6 8 10 12	5 6 8 10 12	14			
	17	35-600		5 6 8 10 12	5 6 8 10 12	15			
	18	45-800	M20-24时	5 6 8 10 12	5 6 8 10 12	17	20	22	24
	20	45-800		5 6 8 10 12 16	5 6 8 10 12 16	19			
	22	55-800	M30时	8 10 12 16 20	8 10 12 16 20	27	30	32	34
	30	55-800		8 10 12 16 20 24	8 10 12 16 20 24	30			
	35	65-800		12 16 20 24 30	12 16 20 24 30	36			
	40	75-800	M4≤P<D	16 20 24 30	16 20 24 30	41	44	46	48
	50	95-800		16 20 24 30	16 20 24 30	41			

h7

型号	最小单位0.1	最小单位1	M		N		K	W	V
代码	D _{h7}	L	E	P	M	N	最小单位1	W	V
MBK51 MBK56	6	18-300	M3-M8时	5	3	3	K=0或 K≥1	5	10
	8	18-400		3 4 5	3 4 5 6	7			
	10	18-500		4 5 6	4 5 6	8			
	12	25-600	M2≤P<D	5 6 8	5 6 8	10	12	14	16
	13	25-700		5 6 8	5 6 8	11			
	15	25-700	M10-M16时	5 6 8 10	5 6 8 10	13	16	18	20
	16	35-800		5 6 8 10 12	5 6 8 10 12 16	17			
	20	35-800		5 6 8 10 12 16	5 6 8 10 12 16	19			
	22	45-800	M20-24时	8 10 12 16 20	8 10 12 16 20	27	30	32	34
	30	45-800		8 10 12 16 20 24	8 10 12 16 20 24	30			
	35	65-800	M30时	12 16 20 24 30	12 16 20 24 30	36	40	42	44
	40	65-800		12 16 20 24 30	12 16 20 24 30	36			
	50	95-800		16 20 24 30	16 20 24 30	41			

h9

型号	最小单位0.1	最小单位1	M		N		K	W	V
代码	D _{h9}	L	E	P	M	N	最小单位1	W	V
MBK91 MBK92 MBK96	6	18-300	M3-M8时	3	3	3	K=0或 K≥1	5	10
	8	18-400		3 4 5	3 4 5	7			
	10	18-500		4 5 6	4 5 6	8			
	12	25-600	M2≤P<D	5 6 8	5 6 8	10	12	14	16
	13	25-600		5 6 8	5 6 8	11			
	15	25-700	M10-M16时	5 6 8 10	5 6 8 10	13	16	18	20
	16	35-800		5 6 8 10 12	5 6 8 10 12 16	17			
	20	35-800		5 6 8 10 12 16	5 6 8 10 12 16	19			
	22	45-800	M20-24时	8 10 12 16 20	8 10 12 16 20	27	30	32	34
	30	45-800		8 10 12 16 20 24	8 10 12 16 20 24	30			
	35	65-800	M4≤P<D	12 16 20 24 30	12 16 20 24 30	36	40	42	44
	40	65-800		12 16 20 24 30	12 16 20 24 30	36			

可选加工

型号	D	L	E	P	M	N	K	可选加工代码
MBK11	6	18-300	1≤E≤P×6	5	3	3	K=0或 K≥1	LA() ...
MBK12	8	18-400	1≤E≤P×6	M2≤P<D	3 4 3 4	3 4 3 4	K=0或 K≥1	LA() ...

请按图示订货



● 优惠价
数量 1~19 20~
价格 100% 另行报价



交货期
3



交货期
5

① 无表面处理

② 有表面处理