

线对板型尼龙连接器

◀ 胶壳/插针座/端头 2.50mm间距

ZKY25



ZKY26-R



ZKY26-V




ZKY27



SGS


代码	类型	绝缘体材质	触点材质	端头材质
ZKY25	胶壳	尼龙-66	—	—
ZKY26	插针座	尼龙-66	黄铜	—
ZKY27	端头	—	—	磷青铜

胶壳
ZKY25

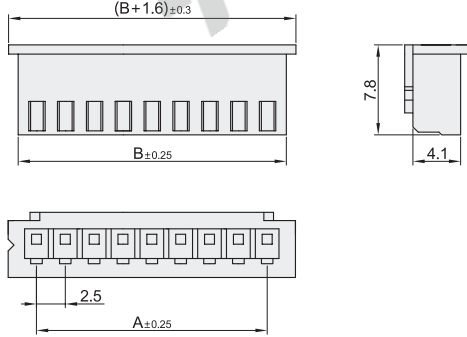


芯数	A	B
2	2.5	5.75
4	7.5	10.75
6	12.5	15.75
8	17.5	20.75
10	22.5	25.75
12	27.5	30.75

插针座
ZKY26(水平安装)

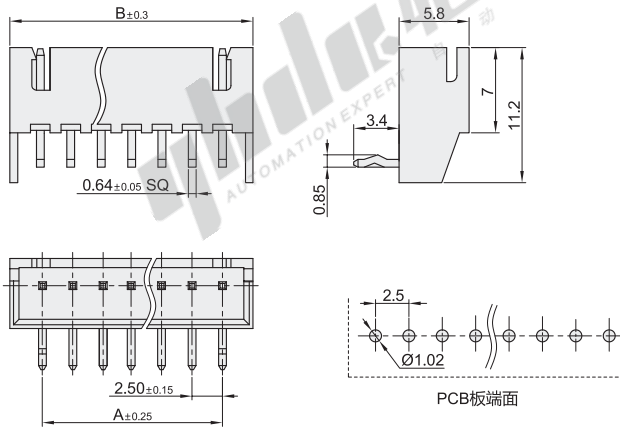




针数	A	B
2	2.5	7.5
4	7.5	12.5
6	12.5	17.5
8	17.5	22.5
10	22.5	27.5
12	27.5	32.5

插针座
ZKY26(垂直安装)

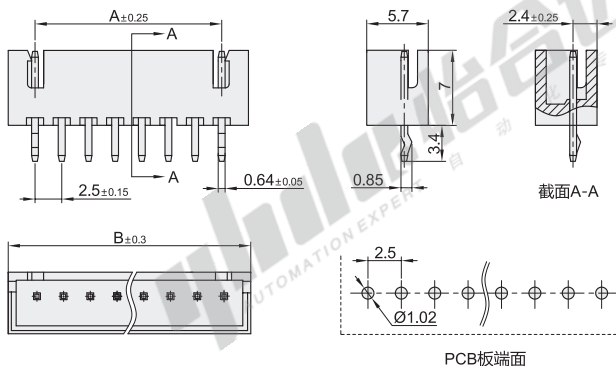

针数	A	B
2	2.5	7.5
4	7.5	12.5
6	12.5	17.5
8	17.5	22.5
10	22.5	27.5
12	27.5	32.5


端头
ZKY27

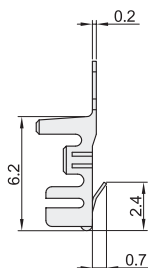

截面A-A



截面B-B



截面C-C



销售方式
见参数表

胶壳

型号		销售方式	胶壳孔间距	适配插针座	适配端头
代码	胶壳芯数				
ZKY25	02 (单行, 2芯)	100PCS起订	2.5	ZKY26-02	ZKY27
	04 (单行, 4芯)			ZKY26-04	
	06 (单行, 6芯)			ZKY26-06	
	08 (单行, 8芯)			ZKY26-08	
	10 (单行, 10芯)			ZKY26-10	
	12 (单行, 12芯)			ZKY26-12	

端头

型号	适配线规	销售方式	适配胶壳
代码 ZKY27	AWG22~28	盘(7000PCS/盘)	ZKY25

插针座

型号		针数	销售方式	适配胶壳
代码	安装方式			
ZKY26	R(水平安装) V(垂直安装)	02 (单行, 2针)	100PCS起订	ZKY25-02
		04 (单行, 4针)		ZKY25-04
		06 (单行, 6针)		ZKY25-06
		08 (单行, 8针)		ZKY25-08
		10 (单行, 10针)		ZKY25-10
		12 (单行, 12针)		ZKY25-12

技术参数

额定电流	3A AC,DC
额定电压	250V AC,DC
温度范围	-25°C~+85°C
绝缘阻抗	1000MΩ Min
耐电压	1000V AC/minute
接触电阻	20mΩ Max
阻燃等级	UL94V-2



请按图示订货

胶壳

型号	
代码	胶壳芯数
ZKY25	02 04

ZKY25-02

插针座

型号		
代码	安装方式	针数
ZKY26	R V	02 04

ZKY26-R-02

端头

代码
ZKY27