

气动密封圈


◀ DYP型
◀ MYA型

代码	类型	材质	硬度(肖氏)	颜色	使用温度范围	用途
XTG40	DYP型	丁腈橡胶	HS75	黑色	-20~120°C	适用于小气缸、快速缸
XTG41		氟橡胶		棕色	-20~250°C	
XTG42	MYA型	丁腈橡胶	HS75	黑色	-20~120°C	孔轴两用型
XTG43		氟橡胶		棕色	-20~250°C	




DYP型
XTG40/41

安装方式


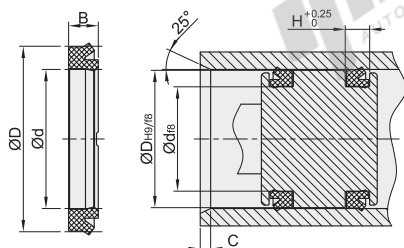


MYA型
XTG42/43

安装尺寸图a

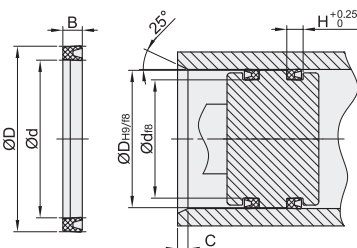

安装尺寸图b



□ DYP型

型号		d	D	B	H	C
代码	规格					
XTG40	01	3	6	2.1	2.5	
	02	5	7.7	1.2	1.5	
	03		8			
	04	6	9	2.1	2.5	
	05	6.5	10			2
	06	7				
XTG41	07	8	10.4	1.2	1.5	
	08	9	12	2.1	2.5	
	09	9.5	12.5	1.6	1.9	
	10	10	13	2.1	2.5	
	11		14			
	12	12	16			
	13	14	18	2.8	3.2	2.5
	14	16	20			
	15	16	22			

□ MAY型

型号		d	D	B	H	C
代码	规格					
XTG42	01	3	6			
	02	4	7			
	03	5	8			
	04	6	9	2.1	2.5	2
	05	7	10			
	06	8	11			
XTG43	07	9	12			
	08		13			
	09	10	14			
	10	11	15			
	11	12	16			
	12	13.6	18			
	13	14				
	14	15	19	2.8	3.2	2.5
	15	16	20			
	16	18	22			
	17	20	24			
	18	21	25			
	19	22	26			
	20	24	30			
	21	34	40	4.2	4.7	3

□ DYP型

型号	
代码	规格
XTG40	05
XTG41	06
XTG41-06	

□ MAY型

型号	
代码	规格
XTG42	01
XTG43	02
XTG42-01	



● 优惠价	
数量	1~50 51~
价格	100% 另行报价

