


圆皮带用滑轮

夹紧型 · U形槽

代码	类型	U形槽	材质		表面处理
			国标	相当	
ENS21	夹紧型	U形槽	45	S45C	发黑
ENS31			LF2	A5052	喷细砂本色阳极氧化

① 3D模型仅供参考，具体尺寸请以参数表为准，注意选型。

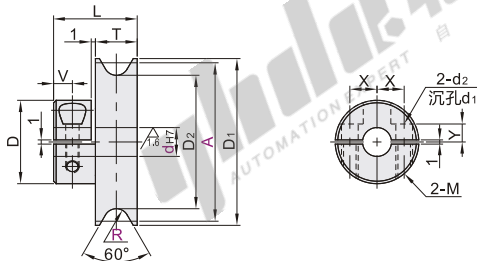

① M=M3时， $d_1=\varnothing 6.5$ $d_2=\varnothing 3.5$
M=M4时， $d_1=\varnothing 8$ $d_2=\varnothing 4.5$



视角标准：第一视角

型号		R	dH7选择	D	D ₁	D ₂	L	T	V	X	Y	M	适用皮带直径
代码	A												
ENS21 ENS31	20	1	4 5	16	22	18				5	3	M3	2
	30		4 5 6 6.35 8	20	32	28	11	5		7	3.5		
	40				42	38			2.5				
	30	1.5	4 5 6 6.35 8	20	32	27	16			7	3.5	M3	3
	40				42	37							
	45		4 5 6 6.35 8 10 11 12	25	47	42	20		4.5	9	4.5	M4	
	60				62	57							
	23				25	19							
	28	2	4 5 6 6.35 8	20	30	24	16		2.5	7	3.5	M3	
	30				32	26							
	40				42	36							4
	45				47	41							
	48		4 5 6 6.35 8 10 11 12	25	50	44	20		4.5	9	4.5	M4	
	60				62	56							
	80				82	76							
	28	2.5	4 5 6 6.35 8	20	30	23	16	10	2.5	7	3.5	M3	
	40				42	35							
	48				50	43							
	50		4 5 6 6.35 8 10 11 12	25	52	45	20		4.5	9	4.5	M4	5
	60				62	55							
	75				77	70							
	80				82	75							
	28	3	4 5 6 6.35 8	20	30	22	16		2.5	7	3.5	M3	
	38		4 5 6 6.35		40	32				6.5			
	48				50	42							
	50				52	44							
	58				60	52	20		4.5	9	4.5	M4	6
	60		4 5 6 6.35 8 10 11 12	25	62	54							
	75				77	69							
	95				97	89							
	100				102	94							

② 可选加工



型号	代码	A	R	dH7选择
ENS21	20	30	4 5	4 5 6 6.35 8
ENS31	30	4 5 6 6.35 8		

ENS21-A20-R1-d5


型号	代码	A	R	dH7选择	可选加工代码
ENS21	20	30	4 5	4 5 6 6.35 8	DC
ENS31	30	4 5 6 6.35 8			

ENS21-A20-R1-d5-DC



优惠价	数量	1~9	10~
价格	100%	另行报价	



代码	技术说明											
DC	切割D ₁ 尺寸	选型方法 DC ① 切割D₁尺寸，减小外径； ② 外径切割的加工面可能不进行表面处理； ③ 适用皮带半径3.0以下规格； ④ 仅适用标准型产品。										
		<table><tr><th>适用皮带半径</th><th>DC</th></tr><tr><td>1</td><td>A+0.8</td></tr><tr><td>1.5</td><td>A+1.2</td></tr><tr><td>2</td><td>A+1.6</td></tr><tr><td>2.5</td><td>A+1.8</td></tr></table>	适用皮带半径	DC	1	A+0.8	1.5	A+1.2	2	A+1.6	2.5	A+1.8
	适用皮带半径	DC										
1	A+0.8											
1.5	A+1.2											
2	A+1.6											
2.5	A+1.8											