

# 欧标40槽宽8.2系列型材(实用型)


◀ 边长40/80mm




代码	材质	表面处理
AOB05	A6063-T5	喷砂氧化

- ① 切断面未进行氧化处理。
- ② 最大使用长度：5880~6000mm。
- ③ 可定制表面处理。

❶ L长度公差




❷ 槽口详图

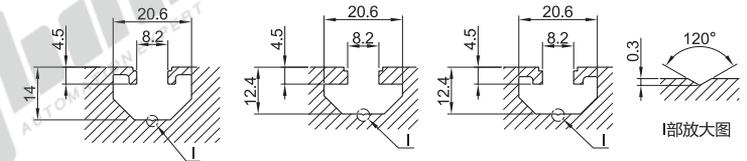


AOB05-J4040E

重量:1.5Kg/m




AOB05-J4040C

重量:1.18Kg/m




AOB05-J4040GE

重量:1.36Kg/m




AOB05-J4040J

重量:1.94Kg/m




AOB05-J4040A

重量:1.44Kg/m




AOB05-J4040B

重量:1.42Kg/m




AOB05-J4040T

重量:1.42Kg/m




AOB05-J4040H

重量:1.39Kg/m




AOB05-J4040R

重量:1.25Kg/m




AOB05-J4080E

重量:2.7Kg/m




AOB05-J4080C

重量:2.04Kg/m




AOB05-J4080GE

重量:2.3Kg/m




AOB05-J4080J

重量:3.67Kg/m




AOB05-J4080A

重量:2.03Kg/m



AOB05-J4080B

重量:2.03Kg/m




槽宽8.2系列  
欧标40

边长80mm ▶

# 欧标40槽宽8.2系列型材(实用型)


AOB05-J8840R

重量:3.23Kg/m

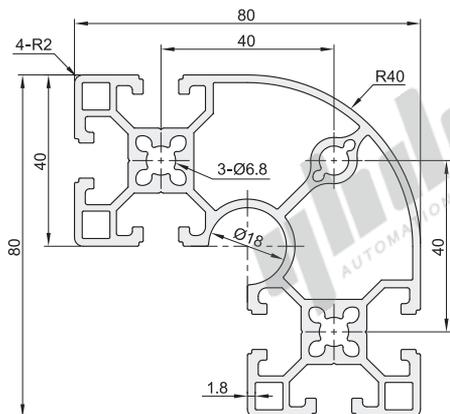


AOB05-J8840RA

重量:3.22Kg/m

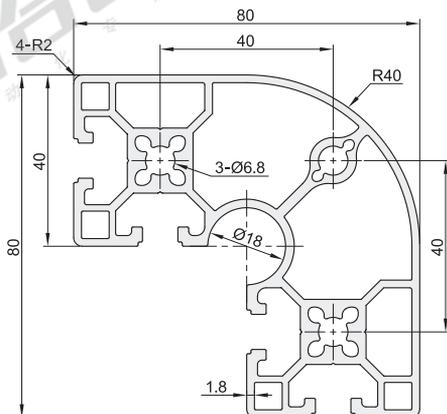


AOB05-J8080

重量:3.81Kg/m

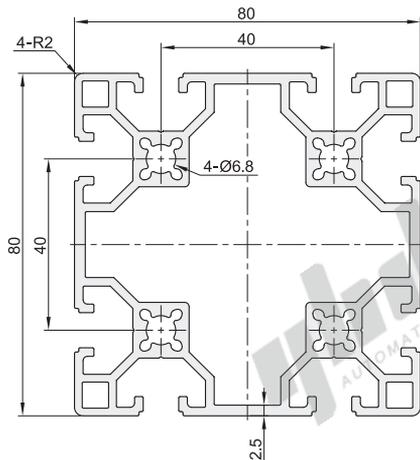

AOB05-J8080J

重量:5.53Kg/m

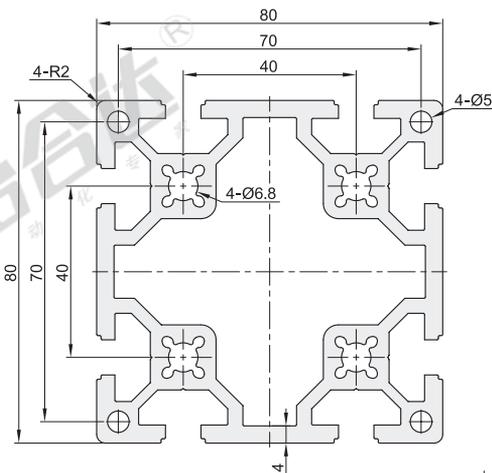

视角标准: 第一视角

代码	型号 规格	L 最小单位0.5	截面尺寸	每米重量Kg/m (理论值)	截面积 (mm <sup>2</sup> )	截面惯性矩		抗弯截面模数	
						Ix	Iy	Wxmax (mm <sup>3</sup> )	Wymax (mm <sup>3</sup> )
AOB05	J4040R	50~6000	40×40	1.25	451.95	5.751×10 <sup>4</sup>	5.751×10 <sup>4</sup>	3301.38	3301.38
	J4040C			1.18	426.50	6.861×10 <sup>4</sup>	6.861×10 <sup>4</sup>	3430.50	3430.50
	J4040GE			1.36	493.92	7.82×10 <sup>4</sup>	7.82×10 <sup>4</sup>	3912.90	3912.90
	J4040E			1.50	544.45	8.534×10 <sup>4</sup>	8.534×10 <sup>4</sup>	4267.00	4267.00
	J4040J			1.94	704.55	11.758×10 <sup>4</sup>	11.758×10 <sup>4</sup>	5879.00	5879.00
	J4040A			1.44	523.75	8.010×10 <sup>4</sup>	8.284×10 <sup>4</sup>	3890.26	4142.00
	J4040B			1.42	515.74	8.021×10 <sup>4</sup>	8.042×10 <sup>4</sup>	3983.59	3961.23
	J4040H			1.39	505.32	7.578×10 <sup>4</sup>	8.126×10 <sup>4</sup>	3789.00	4063.00
	J4040T			1.42	513.91	7.891×10 <sup>4</sup>	8.165×10 <sup>4</sup>	3945.50	4082.50
	J4080E			2.70	981.29	16.834×10 <sup>4</sup>	63.014×10 <sup>4</sup>	8416.84	15753.39
	J4080C			2.04	742.91	12.973×10 <sup>4</sup>	47.865×10 <sup>4</sup>	6486.60	11966.32
	J4080GE			2.30	837.11	14.05×10 <sup>4</sup>	52.87×10 <sup>4</sup>	7023.56	13217.70
	J4080J			3.67	1333.57	23.165×10 <sup>4</sup>	81.866×10 <sup>4</sup>	11582.53	20466.62
	J4080A			2.03	738.80	13.043×10 <sup>4</sup>	47.60×10 <sup>4</sup>	6513.04	11899.79
J4080B	2.03	736.74	12.992×10 <sup>4</sup>	47.599×10 <sup>4</sup>	6487.66	11857.84			
J8840R	3.23	1174.21	68.46×10 <sup>4</sup>	68.46×10 <sup>4</sup>	16014.04	16014.04			
J8840RA	3.22	1169.74	68.254×10 <sup>4</sup>	68.254×10 <sup>4</sup>	15962.11	15962.11			
J8080	3.81	1383.29	102.196×10 <sup>4</sup>	102.196×10 <sup>4</sup>	25549.00	25549.00			
J8080J	5.53	2010.02	145.328×10 <sup>4</sup>	145.328×10 <sup>4</sup>	36332.00	36332.00			

实际重量与理论重量之间存在轻微差异, 这主要源于生产工艺、包装材料等因素的影响。



型号		L
代码	规格	最小单位0.5
AOB05	J4040R	50~6000
	J4040C	

请按图示订货

AOB05 - J4040R - L50

槽宽8.2系列  
欧标40