

代码	类型		材质	内径公差	外径公差
OFK01	直柱型	标准型	高力黄铜(SP2)	F7	m6
OFL01		薄壁型	镶嵌固体润滑剂		




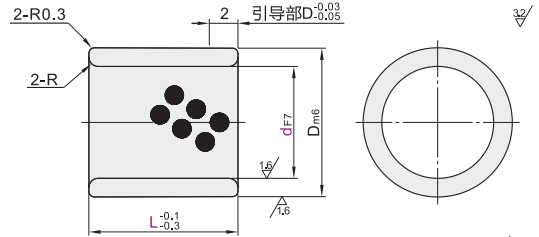
特点

- 自润滑、免维护，适用于重载、低速运动；
- 耐磨性优异，适用于直线、旋转、摇摆运动；
- 耐高温、低温，抗冲击性强。

① 与本产品相配轴径公差：d8重载、e7轻载、g6高精度(仅供参考)。

② 产品压入座孔时在座孔端部或者内壁涂抹少许润滑油，利用油压机或台钳将其慢慢压入座孔，请勿用力敲击产品，以免引起产品变形。

A部(两端)放大图

标准型
OFK01薄壁型
OFL01

③ 与本产品相配固定座直径公差：H7(仅供参考)。

视角标准：第一视角

代码		型号	L										OFK01		OFL01			
		dF7											Dm6	R	Dm6	R		
标准型 OFK01	5	+0.022 +0.010	8	10	12	15	16	20					9	0.5	7	0.3		
	6		8	10	12	15	16	20	25						+0.015 +0.006		8	+0.015 +0.006
	8		8	10	12	15	16	20	25	30					10			
	10	+0.028 +0.013	8	10	12	15	16	20	25	30	35						12	
	12		8	10	12	15	16	20	25	30	35	40	18	1	15	0.4		
	13	+0.034 +0.016	10	12	15	16	20	25	30	35	40	19	16		+0.018 +0.007			
	15		10	12	15	16	20	25	30	35	40	50	21		18			
	16		10	12	15	16	20	25	30	35	40	50	22		20			
	18		10	12	15	16	20	25	30	35	40	50	24	22	+0.021 +0.008			
	20		10	12	15	16	20	25	30	35	40	50	60	70	28	1.5	24	
薄壁型 OFL01	20A	+0.041 +0.020	10	12	15	16	20	25	30	35	40	50	60	70	30	2	—	—
	25		12	15	16	20	25	30	35	40	50	60	70	33	1.5	29	+0.021 +0.008	
	25A		12	15	16	20	25	30	35	40	50	60	70	80	35	2	—	—
	30		12	15	16	20	25	30	35	40	50	60	70	80	38	1.5	34	
	35		16	20	25	30	35	40	50	60	70	80	44	+0.025 +0.009	1.5	40	+0.025 +0.009	
	40	+0.050 +0.025	20	25	30	35	40	50	60	70	80	50	2	45				
	50		25	30	35	40	50	60	70	80	62	+0.030 +0.011	2.5	55	+0.030 +0.011			
	60	+0.060 +0.030	40	50	60	70	80	75	3	—	—	—						
	80		50	60	70	80	96	+0.035 +0.013										
	100	+0.071 +0.036	70	80	100	120												



请按图示订货

代码	型号	d	L
OFK01		8 10	8 10
OFL01		6	8 10

OFL01—d5—L10



未税价(元)

优惠价

数量	1~9	10~
价格	100%	另行报价



交货期

7