



带橡胶密封圈型

标准型 接触角30°

双列角接触球轴承

代码	类型	后置代码	轴承精度	轴承材质		接触角 (°)
				国标	相当	
BBS	标准型	2RS(双面带橡胶密封圈接触式)	GB/T 307.1 0级	GCr15	SUJ2	30

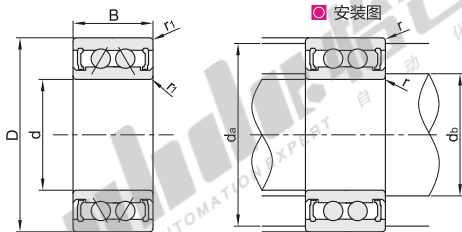

视角标准：第一视角

型号		d	D	B	r1(min)	基本额定负载		容许转速rpm (参考)	安装尺寸			重量(kg) 参考
代码	轴承型号					Cr(动)KN	Cor(静)KN		db (min)	da (max)	r (max)	
BBS	3800-2RS	10	19	7	0.3	2.58	1.56	13000	12	17	0.3	0.015
	3900-2RS		22	10		4.08	2.36	12400		—		0.022
	3000-2RS		26	12		5.5	3.2	13600		24		0.052
	3200-2RS		30	14.3		7	3.8	15000		25.5		0.112
	3300-2RS	12	35	19	0.6	9.2	5.1	14200	16	31.5	0.6	0.018
	3801-2RS		21	7		2.89	1.92	12000		19		0.026
	3901-2RS		24	10		4.36	2.72	11400		—		0.025
	3001-2RS		28	12		6.1	3.7	12600		26		0.063
	3201-2RS	15	32	15.9	0.6	9.2	5.1	14000	18	27.5	0.6	0.123
	3301-2RS		37	19		10	6.1	13200		33.5		0.022
	3802-2RS		24	7		3.09	2.31	9200		22		0.036
	3902-2RS		28	10		4.55	3.12	8800		—		0.072
	3002-2RS	17	32	13	0.6	8.5	5.4	9600	19	30	0.6	0.132
	3202-2RS		35	15.9		10	6.1	12000		30.5		0.240
	3302-2RS		42	19		12.8	7.9	10000		36.5		0.027
	3803-2RS		26	7		3.17	2.52	8600		24		0.042
	3903-2RS	20	30	10	0.3	4.99	3.79	8200	21	—	0.3	0.100
	3003-2RS		35	14		9	6	9000		33		0.190
	3203-2RS		40	17.5		12.8	7.9	11000		35.5		0.369
	3303-2RS		47	22.2		20.4	12.1	9400		41.5		0.030
	3804-2RS	25	32	10	0.3	4.9	3.9	7400	22	30	0.3	0.095
	3904-2RS		37	13		9.3	6.6	7000		—		0.160
	3004-2RS		42	16		14.2	9.6	7800		38.8		0.320
	3204-2RS		47	20.6		19	12.1	9000		41.5		0.585
	3304-2RS	30	52	22.2	1.1	20.6	12.7	8200	27	45	0.3	0.035
	3805-2RS		37	10		5.5	4.9	6000		35		0.138
	3905-2RS		42	13		9.6	7.5	5600		—		0.240
	3005-2RS		47	16		15.2	11	6400		43.8		0.480
	3205-2RS	35	52	20.6	1	20.6	14.3	7800	30.5	46.5	1.5	0.816
	3305-2RS		62	25.4		30.5	20.5	6800		55		0.040
	3806-2RS		42	10		5.7	5.6	5000		40		0.158
	3906-2RS		47	13		9.9	8.3	4600		—		0.279
	3006-2RS	40	55	19	1	20.3	15.5	5400	34.6	50.4	1	0.650
	3206-2RS		62	23.8		28.6	20.4	6500		56.5		1.070
	3306-2RS		72	30.2		39.5	27.5	5800		65		0.055
	3807-2RS		47	10		6.1	6.2	4400		45		0.183
	3907-2RS	45	55	15	0.3	12.9	11.3	4000	36	—	0.3	0.364
	3007-2RS		62	20		24.2	20.4	4800		57.4		0.710
	3207-2RS		72	27		38	27.8	5600		65		1.420
	3307-2RS		80	34.9		49.5	35	5200		71.5		0.075
	3808-2RS	50	52	10	0.3	6.4	6.9	3800	42	50	0.3	0.189
	3908-2RS		62	16		17.4	15.8	3400		—		0.395
	3008-2RS		68	21		24.5	20.8	4200		63.4		0.760
	3208-2RS		80	30.2		42.5	32.5	5000		73		1.950
	3308-2RS	55	90	36.5	1.5	60.5	44	4600	48.5	81.5	0.3	0.010
	3809-2RS		58	10		6.7	7.7	3300		56		0.282
	3909-2RS		68	16		17.9	17.2	2900		—		0.581
	3009-2RS		75	23		39.3	36.4	3700		66		1.050
	3209-2RS	60	85	30.2	1.1	48	37.0	4600	52	78	1.5	2.530
	3309-2RS		100	39.7		72.5	54	4100		91.5		0.140
	3810-2RS		65	12		7.0	8.4	3000		63		0.303
	3910-2RS		72	16		19.1	19.6	2600		—		0.621
	3010-2RS	65	80	23	1.5	42.3	41.9	3400	53	73	1.5	1.400
	3210-2RS		90	30.2		51	42.0	4300		83		3.240
	3310-2RS		110	44.4		85.5	64.5	3800		100		—
	3811-2RS		72	13		12.8	15.4	3000		70		0.010
	3911-2RS	70	80	19	0.3	20	21.7	2600	56	—	0.3	0.282
	3011-2RS		90	26		43.7	44.7	3400		80		0.581
	3211-2RS		100	33.3		63	53.0	3900		91.5		1.050
	3311-2RS		120	49.2		106	82	3400		110		2.530
	3812-2RS	75	78	14	0.3	13.6	16.2	2300	62	76	0.3	0.140
	3912-2RS		85	19		21	23.8	1900		—		0.303
	3012-2RS		95	26		47.2	53.4	2700		86		0.621
	3212-2RS		110	36.5		71.5	58.5	3500		101.5		1.400
	3312-2RS	80	130	54	2.1	122	95.5	3100	72	118	2	3.240



请按图示订货

型号		d	D
代码	轴承型号		
(BBS)	3800-2RS	10	19
	3900-2RS		22

BBS3800-2RS



未税价(元)

● 优惠价

数量	1~19	20~
价格	100%	另行报价



交货期

6

1 Kg f=9.81 N