


# 间隙密封型 内螺纹

# 精密型 旋转接头


代码	类型	材质	表面处理	使用流体	使用压力范围 (Mpa)	使用温度范围 (°C)
J-XYH61	回转接头 间隙密封型	铝合金	阳极氧化	空气	-0.1~1	-10~80




规格: 02M5

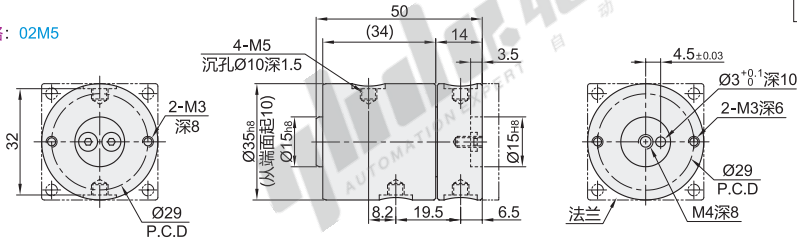


法兰尺寸




规格: 04M5

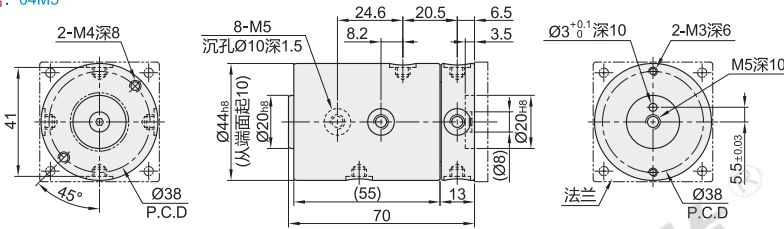


法兰尺寸




规格: 08M5

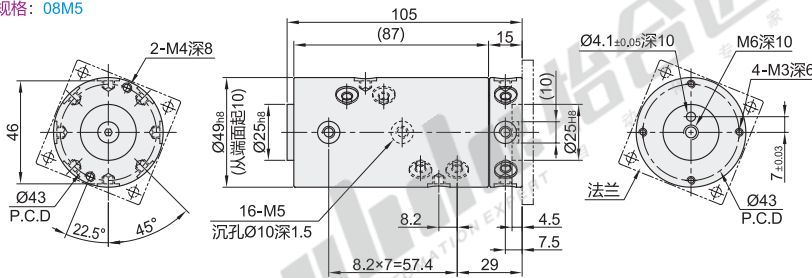


法兰尺寸




规格: 12M5

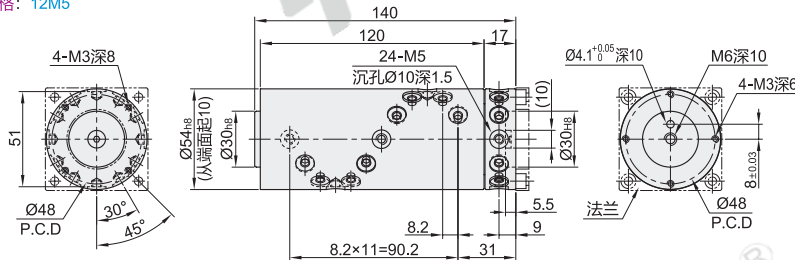


法兰尺寸



规格: 16M5

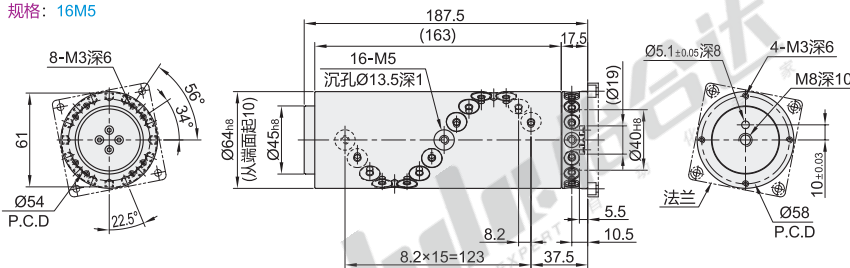

法兰尺寸



视角标准: 第一视角

型号	规格	法兰选择	回路数	接管口径	容许回转数 (min <sup>-1</sup> )	回转扭矩 (N·m)	重量 (kg)
J-XYH61	02M5	无指定	2	M5	2000	0.003	0.16
	04M5	(无法兰)	4		1500	0.05	0.39
	08M5	F (带法兰)	8		900	0.1	0.76
	12M5		12		600	0.2	1.26
	16M5		16		200	0.5	2.8



型号	规格	法兰选择
代码	规格	法兰选择
J-XYH61	02M5	无指定(无法兰)
	04M5	(带法兰)



数量	1~19	20~
优惠价	100%	另行报价

