





0301 KSS 尼龍紮線帶 NYLON CABLE TIE

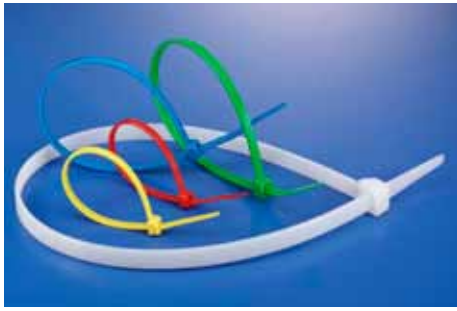

材質：UL合格之NYLON 66，防火等級94V-2。
 顏色：標準色為本色（白色），另備有黑色，特殊顏色歡迎訂做。
 用法：將紮線帶尾巴穿過頭部，即可束緊。




型號 Item No.				長 L		寬 W	最大束線徑 Max.Bundle Dia.	承受力 Min Loop Tensile Strength		
本色(白色)		黑色		mm	inch	mm	mm	lbs	kgs	
100pcs	1000pcs	100pcs	1000pcs							
CV-060	CV-060K	CV-060B	CV-060KB	63.7	2 1/2"	2.4	11	18	8	
※1	CVT-070	CVT-070K	CVT-070B	CVT-070KB	71	2 13/16"	1.6	11	7	3
	CV-075	CV-075K	CV-075B	CV-075KB	75	3"	2.4	15	18	8
	CV-080	CV-080K	CV-080B	CV-080KB	80	3 1/8"	2.5	16	18	8
	CV-094	CV-094K	CV-094B	CV-094KB	96	3 3/4"	2.5	21	18	8
	CV-100	CV-100K	CV-100B	CV-100KB	100	4"	2.5	22	18	8
※1	CVT-100	CVT-100K	CVT-100B	CVT-100KB	103	4"	1.95	22	11	5
	CV-120S	CV-120SK	CV-120SB	CV-120SKB	120	4 3/4"	2.5	28	18	8
	CV-120	CV-120K	CV-120B	CV-120KB	120	4 3/4"	3.2	27	40	18
	CV-120L	CV-120LK	CV-120LB	CV-120LKB	120	4 3/4"	4.8	27	50	22
	CV-120LL	CV-120LLK	CV-120LLB	CV-120LLKB	120	4 3/4"	7.6	22	120	55
	CV-140S	CV-140SK	CV-140SB	CV-140SKB	142	5 1/2"	2.5	35	18	8
	CV-140	CV-140K	CV-140B	CV-140KB	142	5 1/2"	3.2	34	40	18
	CV-150S	CV-150SK	CV-150SB	CV-150SKB	155	6 1/8"	2.5	39	18	8
	CV-150	CV-150K	CV-150B	CV-150KB	150	6"	3.6	36	40	18
	CV-150L	CV-150LK	CV-150LB	CV-150LKB	150	6"	7.6	32	120	55
	CV-160L	CV-160LK	CV-160LB	CV-160LKB	160	6 1/4"	4.8	39	50	22
	CV-165	CV-165K	CV-165B	CV-165KB	165	6 1/2"	2.5	43	18	8
	CV-180	CV-180K	CV-180B	CV-180KB	180	7"	3.6	46	40	18
※2	CV-180T	CV-180TK	CV-180TB	CV-180TKB	180	7"	3.6	46	40	18
	CV-190	CV-190K	CV-190B	CV-190KB	190	7 1/2"	4.8	49	50	22
※2	CV-190T	CV-190TK	CV-190TB	CV-190TKB	190	7 1/2"	4.8	49	50	22
	CV-200M	CV-200MK	CV-200MB	CV-200MKB	203	8"	2.5	55	18	8
	CV-200S	CV-200SK	CV-200SB	CV-200SKB	203	8"	3.2	53	40	18
	CV-200A	CV-200AK	CV-200AB	CV-200AKB	203	8"	3.6	52	40	18
	CV-200	CV-200K	CV-200B	CV-200KB	203	8"	4.6	52	50	22
※3	CV-200T	CV-200TK	CV-200TB	CV-200TKB	203	8"	4.6	52	50	22
	CV-200D	CV-200DK	CV-200DB	CV-200DKB	203	8"	4.8	52	50	22
	CV-200L	CV-200LK	CV-200LB	CV-200LKB	203	8"	7.6	52	120	55
	CV-240L	CV-240LK	CV-240LB	CV-240LKB	240	9 7/16"	7.6	61	120	55
	CV-250S	CV-250SK	CV-250SB	CV-250SKB	250	10"	2.5	68	18	8
	CV-250M	CV-250MK	CV-250MB	CV-250MKB	250	10"	3.6	68	40	18
	CV-250	CV-250K	CV-250B	CV-250KB	250	10"	4.8	68	50	22
NEW	CV-250L		CV-250LB		250	10"	7.6	64	120	55
	CV-265	CV-265K	CV-265B	CV-265KB	265	10 1/2"	3.6	73	40	18
	CV-280	CV-280K	CV-280B	CV-280KB	280	11"	4.8	77	50	22

(接下頁) ※1 CVT-070 無最小束線徑 CVT-100

※2 CV-180T 尾巴、CV-190T 尾巴

※3 CV-200T 尾巴




型號 Item No.				長 L		寬 W	最大束線徑 Max.Bundle Dia.	承受力	
本色(白色)		黑色						Min Loop	Tensile Strength
100pcs	1000pcs	100pcs	1000pcs	mm	inch	mm	mm		
CV-280L	CV-280LK	CV-280LB	CV-280LKB	280	11"	7.6	74	120	55
CV-292	CV-292K	CV-292B	CV-292KB	292	11 1/2"	3.6	82	40	18
CV-300M		CV-300MB		300	11 7/8"	2.5	80	18	8
CV-300S		CV-300SB		300	11 7/8"	4.8	83	50	22
CV-300		CV-300B		300	11 7/8"	7.6	80	120	55
CV-310		CV-310B		310	12"	4.8	86	50	22
CV-330		CV-330B		330	13"	3.6	93	40	18
CV-340		CV-340B		340	13 1/2"	7.6	92	120	55
CV-350		CV-350B		350	13 3/4"	4.6	98	50	22
CV-360		CV-360B		360	14 3/16"	7.6	99	120	55
CV-368S		CV-368SB		368	14 1/2"	3.6	105	40	18
CV-368		CV-368B		368	14 1/2"	4.8	105	50	22
CV-370		CV-370B		370	14 9/16"	7.6	101	120	55
CV-380S		CV-380SB		380	15"	6.4	108	100	45
CV-380		CV-380B		380	15"	7.6	105	120	55
CV-380L		CV-380LB		380	15"	8.0	105	120	55
CV-385		CV-385B		385	15 3/16"	4.8	110	50	22
CV-400S		CV-400SB		400	15 3/4"	2.5	116	18	8
CV-400		CV-400B		400	15 3/4"	4.6	116	50	22
CV-432		CV-432B		432	17"	4.8	125	50	22
CV-450M		CV-450MB		450	17 3/4"	4.8	131	50	22
CV-450		CV-450B		450	17 3/4"	8.0	128	120	55
CV-450L		CV-450LB		450	17 3/4"	9.0	128	175	80
CV-500		CV-500B		500	19 11/16"	4.8	147	50	22
CV-500L		CV-500LB		500	19 11/16"	8.0	143	120	55
CV-550S		CV-550SB		550	21 11/16"	4.8	162	50	22
CV-550		CV-550B		550	21 11/16"	8.0	160	120	55
CV-550D		CV-550DB		550	21 11/16"	9.0	160	175	80
CV-550L		CV-550LB		550	21 11/16"	12.7	159	250	114
CV-610S		CV-610SB		610	24"	4.8	181	50	22
CV-610M		CV-610MB		610	24"	7.6	177	120	55
CV-610		CV-610B		610	24"	9.0	177	175	80
CV-635S		CV-635SB		635	25"	4.8	189	50	22
CV-685		CV-685B		685	27"	9.0	202	175	80
CV-710		CV-710B		710	28"	9.0	209	175	80
NEW CV-730S		CV-730SB		730	28 3/4"	4.8	219	50	22
CV-750		CV-750B		750	29 1/2"	7.5	223	120	55
CV-762		CV-762B		762	30"	9.0	227	175	80
CV-812		CV-812B		812	32"	9.0	243	175	80
CV-914S		CV-914SB		914	36"	4.8	278	50	22
CV-914		CV-914B		914	36"	9.0	275	175	80
CV-940		CV-940B		940	37"	9.0	284	175	80
CV-1168		CV-1168B		1168	46"	9.0	356	175	80
CV-1219		CV-1219B		1219	48"	9.0	372	175	80
CV-1500		CV-1500B		1500	59"	9.0	462	175	80



0301 KSS 抗UV紮線帶 UV RESISTANT NYLON CABLE TIE




材質：UL合格之NYLON 66，防火等級94V-2。
 顏色：黑色。
 特點：抗UV原料（抗紫外線），適合戶外使用。
 用法：將紮線帶尾巴穿過頭部，即可束緊。



型號 Item No.		長 L		寬 W	最大束線徑 Max.Bundle Dia.	承受力 Min LoopTensile Strength	
100pcs	1000pcs	mm	inch	mm	mm	lbs	kgs
CV-060W	CV-060KW	63.7	2 1/2"	2.4	11	18	8
※1 CVT-070W	CVT-070KW	71	2 13/16"	1.6	16	7	3
CV-075W	CV-075KW	75	3"	2.4	15	18	8
CV-080W	CV-080KW	80	3 1/8"	2.5	16	18	8
CV-094W	CV-094KW	96	3 3/4"	2.5	21	18	8
CV-100W	CV-100KW	100	4"	2.5	22	18	8
※1 CVT-100W	CVT-100KW	103	4"	1.95	22	18	8
CV-120SW	CV-120SKW	120	4 3/4"	2.5	28	18	8
CV-120W	CV-120KW	120	4 3/4"	3.2	27	40	18
CV-120LW	CV-120LKW	120	4 3/4"	4.8	27	50	22
CV-120LLW	CV-120LLKW	120	4 3/4"	7.6	22	120	55
CV-140SW	CV-140SKW	142	5 1/2"	2.5	35	18	8
CV-140W	CV-140KW	142	5 1/2"	3.2	34	40	18
CV-150SW	CV-150SKW	155	6 1/8"	2.5	39	18	8
CV-150W	CV-150KW	150	6"	3.6	36	40	18
CV-150LW	CV-150LKW	150	6"	7.6	32	120	55
CV-160LW	CV-160LKW	160	6 1/4"	4.8	39	50	22
CV-165W	CV-165KW	165	6 1/2"	2.5	43	18	8
CV-180W	CV-180KW	180	7"	3.6	46	40	18
※2 CV-180TW	CV-180TKW	180	7"	3.6	46	40	18
CV-190W	CV-190KW	190	7 1/2"	4.8	49	50	22
※2 CV-190TW	CV-190TKW	190	7 1/2"	4.8	49	50	22
CV-200MW	CV-200MKW	203	8"	2.5	55	18	8
CV-200SW	CV-200SKW	203	8"	3.2	53	40	18
CV-200AW	CV-200AKW	203	8"	3.6	52	40	18
CV-200W	CV-200KW	203	8"	4.6	52	50	22
※3 CV-200TW	CV-200TKW	203	8"	4.6	52	50	22
CV-200DW	CV-200DKW	203	8"	4.8	52	50	22
CV-200LW	CV-200LKW	203	8"	7.6	52	120	55
CV-240LW	CV-240LKW	240	9 7/16"	7.6	61	120	55

(接下頁) ※1 CVT-070W 無最小束線徑 ※2 CV-180TW 尾巴、CV-190TW 尾巴 ※3 CV-200TW 尾巴



配線槽

配線標誌

紮線帶

結束帶

固定座

固定頭、浪管

保護部品

接線頭

套管

固定夾

PC板部品

扣具

型號 Item No.		長 L		寬 W	最大束線徑 Max.Bundle Dia.	承受力 Min LoopTensile Strength	
100pcs	1000pcs	mm	inch	mm	mm	lbs	kgs
CV-250SW	CV-250SKW	250	10"	2.5	68	18	8
CV-250MW	CV-250MKW	250	10"	3.6	68	40	18
CV-250W	CV-250KW	250	10"	4.8	68	50	22
NEW CV-250LW		250	10"	7.6	64	120	55
CV-265W	CV-265KW	265	10 1/2"	3.6	73	40	18
CV-280W	CV-280KW	280	11"	4.8	77	50	22
CV-292W	CV-292KW	292	11 1/2"	3.6	82	40	18
CV-300MW		300	11 7/8"	2.5	80	18	8
CV-300SW		300	11 7/8"	4.8	83	50	22
CV-300W		300	11 7/8"	7.6	80	120	55
CV-310W		310	12"	4.8	86	50	22
CV-330W		330	13"	3.6	93	40	18
CV-340W		340	13 1/2"	7.6	92	120	55
CV-350W		350	13 3/4"	4.6	98	50	22
CV-360W		360	14 3/16"	7.6	99	120	55
CV-368SW		368	14 1/2"	3.6	105	40	18
CV-368W		368	14 1/2"	4.8	105	50	22
CV-370W		370	14 9/16"	7.6	101	120	55
CV-380SW		380	15"	6.4	108	100	45
CV-380W		380	15"	7.6	105	120	55
CV-380LW		380	15"	8.0	105	120	55
CV-385W		385	15 3/16"	4.8	110	50	22
CV-400SW		400	15 3/4"	2.5	116	18	8
CV-400W		400	15 3/4"	4.6	116	50	22
CV-432W		432	17"	4.8	125	50	22
CV-450MW		450	17 3/4"	4.8	131	50	22
CV-450W		450	17 3/4"	8.0	128	120	55
CV-450LW		450	17 3/4"	9.0	128	175	80
CV-500W		500	19 11/16"	4.8	147	50	22
CV-500LW		500	19 11/16"	8.0	143	120	55
CV-550SW		550	21 11/16"	4.8	162	50	22
CV-550W		550	21 11/16"	8.0	160	120	55
CV-550DW		550	21 11/16"	9.0	160	175	80
CV-550LW		550	21 11/16"	12.7	159	250	114
CV-610SW		610	24"	4.8	181	50	22
CV-610MW		610	24"	7.6	177	120	55
CV-610W		610	24"	9.0	177	175	80
CV-635SW		635	25"	4.8	189	50	22
CV-685W		685	27"	9.0	202	175	80
CV-710W		710	28"	9.0	209	175	80
NEW CV-730SW		730	28 3/4"	4.8	219	50	22
CV-750W		750	29 1/2"	7.5	223	120	55
CV-762W		762	30"	9.0	227	175	80
CV-812W		812	32"	9.0	243	175	80
CV-914SW		914	36"	4.8	278	50	22
CV-914W		914	36"	9.0	275	175	80
CV-940W		940	37"	9.0	284	175	80
CV-1168W		1168	46"	9.0	356	175	80
CV-1219W		1219	48"	9.0	372	175	80
CV-1500W		1500	59"	9.0	462	175	80