

角接触球轴承



单列
不配对



C&U



安装图

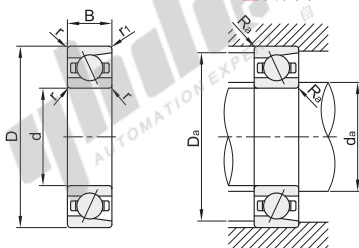

视角标准：第一视角

型号	主要尺寸(mm)					基本额定载荷(KN)		极限转速(rpm)		安装相关尺寸(mm)			重量(g) 参考
	d	D	B	r (min)	r ₁ (min)	Cr(动)	Cor(静)	脂润滑	油润滑	d _a (min)	D _a	R _a	
7200AC/P5-C&U	10	30	9	0.6	0.3	6.22	2.85	33000	46000	15	25	0.6	29
7200B/P5-C&U		28	8	0.3	0.15	4.98	2.49	22000	30000	14.5	25.5	0.3	29
7001AC/P5-C&U	12	32	10	0.6	0.3	5.58	2.79	32000	45000	17	27	0.6	25
7201AC/P5-C&U		32	10	0.6	0.3	7.66	3.73	30000	42000	17	27	0.6	35
7201B/P5-C&U	15	35	12	0.6	0.3	7.43	4.31	20000	27000	17.5	29.5	0.3	36
7002C/P5-C&U		35	12	0.6	0.3	6.24	3.39	32000	45000	17.5	29.5	0.3	35
7202AC/P5-C&U	17	40	12	0.6	0.3	5.97	3.24	27000	38000	20	30	0.6	35
7202AC/P5-C&U		40	12	0.6	0.3	7.39	3.9	26000	37000	20	30	0.6	46
7003C/P5-C&U	20	47	14	1	0.6	6.61	3.81	28000	40000	19.5	32.5	0.3	45
7203AC/P5-C&U		47	14	1	0.6	6.3	3.65	25000	35000	22	35	0.6	46
7203B/P5-C&U	25	52	16	1	0.6	10.5	5.61	23000	32000	22	35	0.6	64
7203B/P5-C&U		52	16	1	0.6	9.03	5.54	16000	21000	23	41	1	66
7303AC/P5-C&U	30	60	19	1	0.6	15.2	7.99	19000	27000	23	41	1	107
7303B/P5-C&U		60	19	1	0.6	14.8	8.02	15000	20000	25	41	1	109
7004C/P5-C&U	35	68	21	1	0.6	11.1	6.56	24000	34000	25	41	1	79
7204AC/P5-C&U		68	21	1	0.6	10.6	6.27	21000	29000	26	41	1	80
7204C/P5-C&U	40	75	24	1	0.6	14.5	8.05	23000	32000	26	41	1	98
7204AC/P5-C&U		75	24	1	0.6	14	7.77	20000	27000	26	41	1	100
7204B/P5-C&U	45	82	27	1	0.6	13.3	7.63	13000	18000				102



请按图示订货

型号

7204B/P5-C&U



未税价(元)

优惠价

数量 1~9 10~
价格 100% 另行报价



交货期

7

怡合达
AUTOMATION EXPERT
自动化专家