

直柱型 · 内径F7外径m6/内径E7外径r6
 肩型 · 内径E7外径r6
 特殊铜合金


无油衬套

直柱型 · 内径F7外径m6/内径E7外径r6

| 代码 | 类型 | 材质 | 内径公差 | 外径公差 | 耐热温度 |
|-------|-----|-------|------|------|-------------|
| OFG01 | 直柱型 | 特殊铜合金 | F7 | m6 | -30 ~ 150°C |
| OFG02 | | | E7 | r6 | |



① 请在使用时定期润滑。

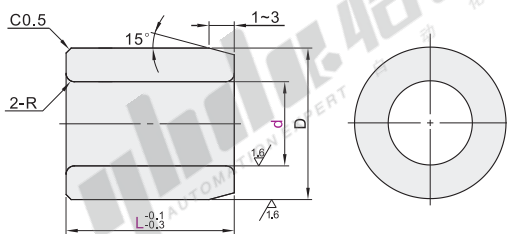

② 与本产品相配固定座直径公差：H7(仅供参考)。



| 代码 | 型号 | | L | | | | | | D _{m6} | | R | |
|-------|-----------------|--------|----|----|----|----|----|----|-----------------|--------|--------|-----|
| | d _{F7} | | 8 | 10 | 12 | 15 | 20 | 25 | 9 | | | |
| OFG01 | 5 | +0.022 | 8 | 10 | 12 | 15 | 20 | | 9 | +0.015 | 0.5 | |
| | 6 | +0.010 | 8 | 10 | 12 | 15 | 20 | 25 | 10 | +0.006 | | |
| | 8 | +0.028 | 8 | 10 | 12 | 15 | 20 | 25 | 12 | | | |
| | 10 | +0.013 | 8 | 10 | 12 | 15 | 20 | 25 | 30 | 14 | +0.018 | 1 |
| | 12 | | 10 | 12 | 15 | 20 | 25 | 30 | 18 | +0.007 | | |
| | 13 | +0.034 | 10 | 12 | 15 | 20 | 25 | 30 | 40 | 19 | | |
| | 15 | +0.016 | 10 | 12 | 15 | 20 | 25 | 30 | 40 | 50 | +0.021 | |
| | 16 | | 10 | 12 | 15 | 20 | 25 | 30 | 40 | 50 | +0.008 | 1.5 |
| | 20 | | 15 | 20 | 25 | 30 | 40 | 50 | 28 | | | |
| | 25 | +0.041 | 15 | 20 | 25 | 30 | 40 | 50 | 60 | 33 | +0.025 | |
| 30 | +0.020 | 20 | 25 | 30 | 40 | 50 | 60 | 38 | +0.009 | | | |


| 代码 | 型号 | | L | | | | | | D _{r6} | | R | |
|-------|-----------------|--------|----|----|----|----|----|----|-----------------|--------|--------|--------|
| | d _{E7} | | 8 | 10 | 12 | 15 | 20 | 25 | 9 | | | |
| OFG02 | 5 | +0.032 | 8 | 10 | 12 | 15 | 20 | 25 | 9 | +0.028 | 0.5 | |
| | 6 | +0.020 | 8 | 10 | 12 | 15 | 20 | 25 | 10 | +0.019 | | |
| | 8 | +0.040 | 8 | 10 | 12 | 15 | 20 | 25 | 12 | | | |
| | 10 | +0.025 | 8 | 10 | 12 | 15 | 20 | 25 | 14 | +0.034 | 1 | |
| | 12 | | 10 | 12 | 15 | 20 | 25 | 30 | 18 | +0.023 | | |
| | 13 | +0.050 | 10 | 12 | 15 | 20 | 25 | 30 | 19 | | | |
| | 15 | +0.032 | 10 | 12 | 15 | 20 | 25 | 30 | 40 | 21 | | +0.041 |
| | 16 | | 10 | 12 | 15 | 20 | 25 | 30 | 40 | 50 | +0.028 | 1.5 |
| | 20 | | 12 | 15 | 20 | 25 | 30 | 40 | 50 | 60 | 28 | |
| | 25 | +0.061 | 15 | 20 | 25 | 30 | 40 | 50 | 60 | 33 | +0.050 | |
| 30 | +0.040 | 20 | 25 | 30 | 40 | 50 | 60 | 38 | +0.034 | | | |

肩型 · 内径E7外径r6


| 代码 | 类型 | 材质 | 内径公差 | 外径公差 | 耐热温度 |
|-------|----|-------|------|------|-------------|
| OFG31 | 肩型 | 特殊铜合金 | E7 | r6 | -30 ~ 150°C |



① 请在使用时定期润滑。

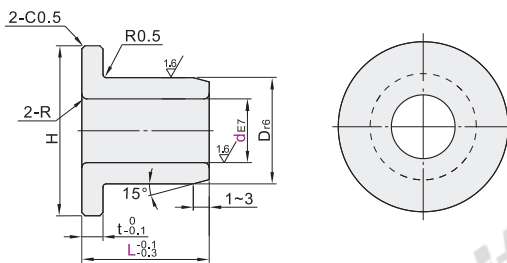

② 与本产品相配固定座直径公差：H7(仅供参考)。



| 代码 | 型号 | | L | | | | | | D _{r6} | | H | t | R |
|-------|-----------------|--------|----|----|----|----|--------|---|-----------------|--------|----|---|-----|
| | d _{E7} | | 10 | 12 | 15 | 20 | 25 | 30 <th>9</th> <th></th> <th>14</th> <th></th> <th></th> | 9 | | 14 | | |
| OFG31 | 5 | +0.032 | 10 | 12 | 15 | | | | 9 | +0.028 | 14 | | 0.5 |
| | 6 | +0.020 | 10 | 12 | 15 | 20 | | | 10 | +0.019 | 16 | | |
| | 8 | +0.040 | 10 | 12 | 15 | 20 | | | 12 | | 20 | | |
| | 10 | +0.025 | 10 | 12 | 15 | 20 | 25 | 30 | 14 | +0.034 | 22 | | 1 |
| | 12 | | 10 | 12 | 15 | 20 | 25 | 30 | 18 | +0.023 | 25 | | |
| | 13 | +0.050 | 10 | 12 | 15 | 20 | 25 | 30 | 19 | | 26 | | |
| | 15 | +0.032 | 10 | 12 | 15 | 20 | 25 | 30 | 21 | +0.041 | 28 | | |
| | 16 | | 12 | 15 | 20 | 25 | 30 | 40 | 22 | +0.028 | 29 | | 1.5 |
| | 20 | | 12 | 15 | 20 | 25 | 30 | 40 | 50 | 30 | 40 | | |
| | 25 | +0.061 | 20 | 25 | 30 | 40 | 50 | 35 | +0.050 | 45 | 5 | 2 | |
| 30 | +0.040 | 25 | 30 | 40 | 50 | 40 | +0.034 | 50 | | | | | |

直柱型

| 代码 | 型号 | d | L |
|-------|----|--------|-------------|
| OFG31 | 6 | ∅12 15 | 10 12 15 20 |

OFG31 — d5 — L10



| 数量 | 1~9 | 10~ |
|----|------|------|
| 价格 | 100% | 另行报价 |



7



无油衬套

E1