


卡扣式圆形连接器

后螺母插座
防水型 锌合金

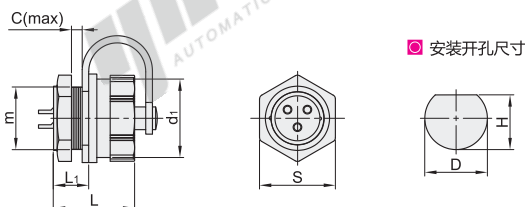

视角标准：第一视角

型号		规格	芯数	端头	m	d ₁	C	L ₁	L	S	D	H	适配插头 代码
代码	外壳形状												
ZIX76	ZM (后螺母插座)		2										ZIX49
			3										
			4										
		16	5		M16×1	18		9.7	22	21.2	15.9	15.3	
			7										
			9										
			10										
			2										
			3										
			4										
		20	5		M20×1	22		9.9		25.5	19.9	19.3	
			6	J(插针)									
			7	K(插孔)			5						
			9										
			12										
			10										
		24	12		M24×1	26		10	23	29.2	23.9	23.2	
			19										
			7										
			12										
			16										
		28	17		M28×1	30		10.2		33.3	27.7	26.9	
			20										
			24										
			26										

请按图示订货

型号		规格	芯数	端头
代码	外壳形状			
ZIX76	ZM	16	4	J(插针)
			5	K(插孔)

ZIX76-ZM-16-4-K

性能表

连接方式	卡扣连接
接线方式	焊接
接插次数	500次
温度范围	-40℃~+85℃
防护等级	IP67