



直管接头型

代码	类型	材质
J-XZF03	直管接头型	PBT
J-XZF04		PP

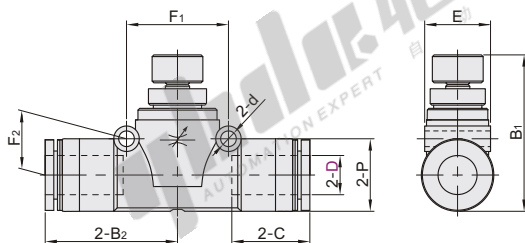

视角标准：第一视角

PBT

型号		B ₁		B ₂	P	E	C	d	F ₁	F ₂	重量 (g)
代码	D	min	max								
J-XZF03	4	18.1	20.5	21	10	10.5	14.9		12.7	4.8	8.9
	6	21.6	25.4	24.4	12.5	13.1	17	3.2	14.8	6.2	14
	8	24.6	28.3	28	14.8	15.4	18.1		18.2	7.2	25
	10	28.9	32.8	31.8	18.2	19.7	20.2	4.2	22.2	8.7	45
	12	31.5	35.4	36.9	21.2	22.7	23.4		25.7	10.2	65

PP

型号		B ₁		B ₂	P	E	C	d	F ₁	F ₂	重量 (g)
代码	D	min	max								
J-XZF04	4	18.1	20.6	21.1	10	10.5	15		12.7	4.8	7.9
	6	21.5	25.3	24.6	12.5	13.1	17.1	3.2	14.8	6.2	13
	8	24.6	28.4	28	14.8	15.4	18.1		18.2	7.2	23
	10	28.9	32.9	32	18.2	19.7	20.4	4.2	22.2	8.7	41
	12	31.5	35.4	37.1	21.2	22.7	23.6		25.7	10.2	58

PBT

型号		B ₁	
代码	D	min	max
J-XZF03	6	21.6	25.4
	8	24.6	28.3

J-XZF03-D6

PP

型号		B ₁	
代码	D	min	max
J-XZF04	6	21.5	25.3
	8	24.6	28.4

J-XZF04-D6



请按图示订货





未税价(元)

优惠价	数量	1~29	30~
价格	100%	另行报价	

交货期	9
-----	---

外螺纹·弯接头·标准型

代码	类型		材质			表面处理
			主体	螺纹部	脱离环部	
J-XZE01	弯接头	标准型	PBT	黄铜	POM	镀镍

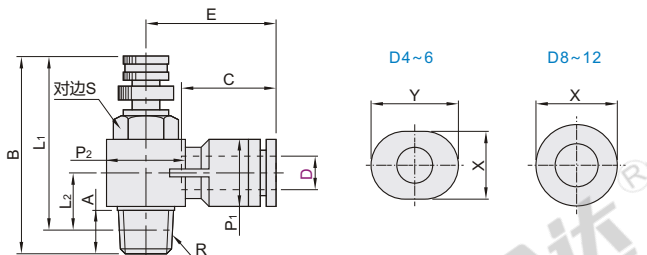

视角标准：第一视角

型号		公称型号	R	A	B		L ₁		L ₂	P ₁	P ₂	C	E	对边 S	X	Y	重量 (g)
代码	D				min	max	min	max									
J-XZE01	4	M5	M5	2.9	29.7	27	26.8	24.1	6.7	8	9.8	11	15.4	8	7.8	9.8	7.9
		1	R1/8	8	41.3	35.2	37.3	31.2	10.7		14.4		17.7	10			18
		M5	M5	2.9	29.7	27	26.8	24.1	7.5		9.8		17.5	8			8.6
	6	1	R1/8	8	41.3	35.2	37.3	31.2	10.7	10.5	14.4	11.6	18.3	10	9.8	11.8	19
		2	R1/4	11.1	48.7	41.9	42.7	35.9	11.9		18.4		20.2	14			37
		M5	M5	2.9	29.7	27	26.8	24.1	7.5		9.8		17.5	8			8.6
	8	1	R1/8	8	41.3	35.2	37.3	31.2	10.7	14.4	14.4		26.9	10			22
		2	R1/4	11.1	48.7	41.9	42.7	35.9	13.2		18.4	18.1	28.4	14	13.8		40
		3	R3/8	13.2	55	47.1	48.6	40.7	15.4				28.9	19			71
	10	2	R1/4	11.1	48.7	41.9	42.7	35.9	14.8	17.6			30.9	14			44
		3	R3/8	13.2	55	47.1	48.6	40.7	15.4		22	20.2	31.2	19	16.8		74
		12	R3/8	13.2	55	47.1	48.6	40.7	16.7			23.4	36.9		19.8		78



请按图示订货

型号		公称型号	R
代码	D		
J-XZE01	4	M5	M5
	1	R1/8	R1/8

J-XZE01-D4-M5



未税价(元)

优惠价	数量	1~29	30~
价格	100%	另行报价	

交货期	1
-----	---