


气压用连接块

- T形·端面贯穿
- T形·端面无孔

T形端面贯穿

代码	类型	边长	材质		表面处理	常压
KBC01	T形端面贯穿 间距固定型	30×40	国标	相当	本色阳极氧化	1MPa(≈10.2Kgf/cm ²)以下

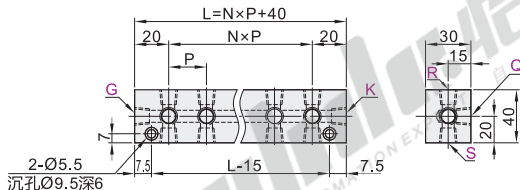

型号		Rc (PT) /M/NPT选择		间距P	N	螺孔数
代码	侧面孔数	Q·R·S·G·K				
KBC01	1K	1	(1/8)	30	0	5
	2K	2	(1/4)		1	8
	3K	5	(M5)		2	11
	4K				3	14
	5K	1N	(NPT1/8)		4	17
	6K	2N	(NPT1/4)		5	20



请按图示订货

型号	Rc(PT)/M/NPT选择
代码	侧面孔数 Q·R·S·G·K
KBC01	1K (1/8)
	2K (1/4)

KBC01-1K-Q1-R1-S2-G2-K2



未税价(元)

优惠价	数量	1~4	5~
价格	100%	另行报价	

交货期	5
-----	---


① 当侧面孔数为"6K"时, 在L/2的位置上会增多一个M5的安装孔。

T形端面无孔


代码	类型	边长	材质		表面处理	常压
KBF01	T形端面无孔 标准型	25×25	国标	相当	本色阳极氧化	1MPa(≈10.2Kgf/cm ²)以下
KBF02		35×35	LF2	A5052		




KBF01-1K
KBF02-1K




KBF01-4K
KBF02-4K

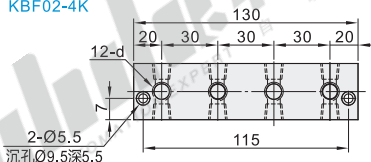


KBF01-2K
KBF02-2K




KBF01-5K
KBF02-5K

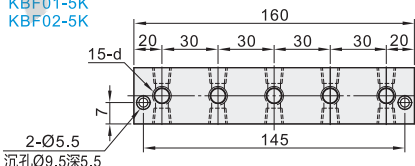


KBF01-3K
KBF02-3K




KBF01-6K
KBF02-6K

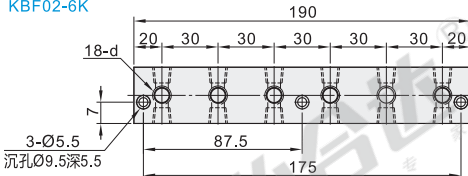


适用规格
— 11
— 55




适用规格
— 22N




适用规格
— 11
— 55




适用规格
— 22N



适用规格
— 11
— 55



适用规格
— 22N



视角标准: 第一视角

型号	侧面孔数	螺纹代号	Rc (PT) / M
边长25×25 KBF01	1K	11	1/8
		55	M5
	2K	11	1/8
		55	M5
	3K	11	1/8
		55	M5
	4K	11	1/8
		55	M5
	5K	11	1/8
		55	M5
	6K	11	1/8
		55	M5

型号	侧面孔数	螺纹代号	Rc (PT) / M
边长35×35 KBF02	1K	22N	1/4
	2K		
	3K		
	4K		
	5K		
	6K		



请按图示订货

型号	侧面孔数	螺纹代号
代码		
KBF01	1K	11
		55

KBF01-1K-55



未税价(元)

优惠价	数量	1~4	5~
价格	100%	另行报价	

交货期	5
-----	---

① 螺纹代号: 如11, 表示d为1/8管螺纹。