


标准型

代码	类型	材质		表面处理	附件
		国标	相当		
GEL01	标准型	45	S45C	发黑	1个内六角紧固螺钉
GEL02				喷细砂无电解镀镍	1个内六角紧固螺钉(不锈钢)



❗ 如对防锈有要求，请优先选用不锈钢材质或喷细砂无电解镀镍产品。

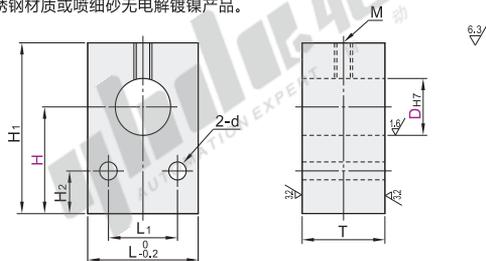

视角标准：第一视角

型号		H			L	H ₁	H ₂	T	L ₁	d	M	
代码	D _{H7}											
GEL01	8	+0.015 0	25	30	22	H+8.8	5	12	10	4.5	4	
	10		25	30		H+9.8						
	12		25	30		H+10.8						
	13	25	30	H+11.8								
	15	+0.018 0	25	30	40	H+14.8						
GEL02	16		25	30	40	28		16				
GEL02	18	+0.021 0	25	30	40	50	32	7	18	6.6	6	
	20		25	30	40	50						H+17.8
	25		30	40	50	H+19.8						
	30	30	40	50	60	H+22.8						
	35	+0.025 0	40	50	60	50	H+24.8		10			22
	40		40	50	60	H+29.8						



型号		H	
代码	D _{H7}		
GEL01	8	25	30
GEL02	10	25	30
	12	25	30

GEL02—D8—H25



优惠价	
数量	价格
1~9	100% 另行报价
10~	



交货期
5


开口型

代码	类型	材质		表面处理	附件	
		国标	相当			
GEP01	开口型	45	S45C	发黑	1个内六角圆柱头螺钉	
GEP02				喷细砂无电解镀镍		
GEP06				0Cr18Ni9	SUS304	1个内六角圆柱头螺钉(不锈钢)
GEP08				LD31	A6063	喷细砂本色阳极氧化



❗ 开口型，安装孔D的公差H7为开口加工前的公差，开口加工后由于有内部应力释放，公差有可能增至H8左右，不影响客户使用。

❗ 如对防锈有要求，请优先选用不锈钢、铝合金材质或喷细砂无电解镀镍产品。

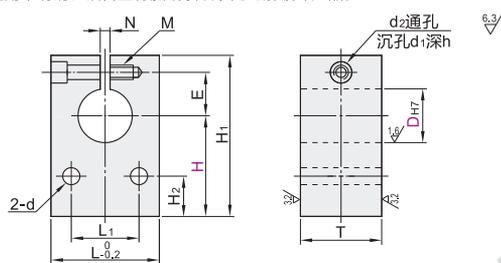

视角标准：第一视角

型号		H			L	H ₁	H ₂	T	L ₁	E	d	M	d ₂	d ₁	h	N	
代码	D _{H7}																
GEP01	8	20	25	30	22	H+15.8	5	12	10	11	4.5	M4深8	4.5	8	4.7		
	10	20	25	30		H+17.8											
	12	20	25	30		H+19.8											
	13	20	25	30		H+25.8											
	15	25	30	40		H+27.8											
GEP02	16	25	30	40	28	H+19.8		16	15						1.2~2.3		
GEP06	18	25	30	40	32	H+25.8	7	16	18	18	6.6	M6深12	6.6	11	6.7		
	20	25	30	40		50											H+27.8
	25	30	40	50		H+32.8											
	30	30	40	50		60											H+35.8
	35	40	50	60		50											H+37.8
	40	40	50	60	H+37.8					29							



型号		H	
代码	D _{H7}		
GEP01	8	20	30
GEP02	10	20	30
	12	20	30

GEP02—D8—H25



优惠价	
数量	价格
1~9	100% 另行报价
10~	



交货期
5