


压轧滚珠丝杠螺帽支架

通用型 圆孔型




代码	类型	材质	表面处理
LFF31			发黑
LFF32	通用型	S45C	无电解镀镍
LFF36		A6061	本色阳极氧化


规格: 16L/20L/32S

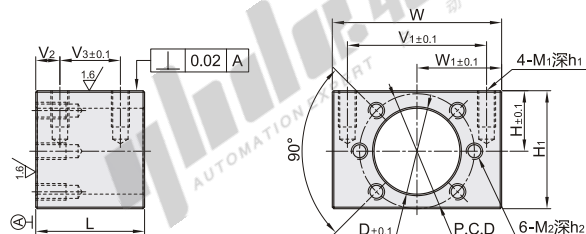

规格: 16/20/25/32

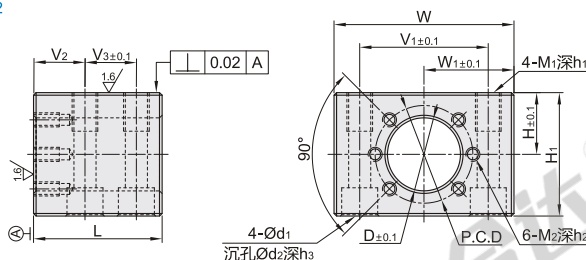

规格: 40

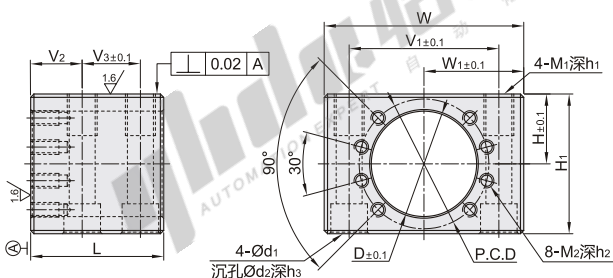

视角标准: 第一视角

型号		H	W	H ₁	P.C.D	D	V ₁	W ₁	L	V ₂	V ₃	M ₁ 深h ₁	M ₂ 深h ₂	d ₁	d ₂	h ₃	适用滚珠丝杠	
代码	规格																丝杠轴径	丝杠导程
LFF31 LFF32 LFF36	16L	20	56	39	38	28.4	46	28	36	8	20	M6深12	M5深10	—	—	—	16	5/10/16
	16	24	70	48	38	28.4	50	35	50	20	20	M10深15	M5深10	8.4	13.5	8.5	16	5/10/16
	20L	23	75	48	47	36.4	55	37.5	55	22	23	M8深14	M6深11	—	—	—	20	5/20
	20	28	75	54	47	36.4	55	37.5	55	22	23	M10深15	M6深11	8.4	13.5	8.5	20	5/20
	25	30	80	58	51	40.4	60	40	55	22	23	M10深15	M6深11	8.4	13.5	8.5	25	5/10/25
	32S	35	90	68	65	50.4	70	45	70	12.5	45	M12深20	M8深14	—	—	—	32	5/10/20/32
	32	35	100	68	65	50.4	75	50	70	27	30	M16深20	M8深14	13	18.5	12.5	32	5/10/20/32
	40	42	120	84	78	63.4	90	60	80	31	35	M18深25	M8深17	15	21.5	14.5	40	5/10/12/16/20/40



请按图示订货

型号	
代码	规格
LFF31	16
LFF32	20L
LFF36	—

LFF31 — 16



未税价(元)

● 优惠价

数量	1~4	5~
价格	100%	另行报价



交货期
7