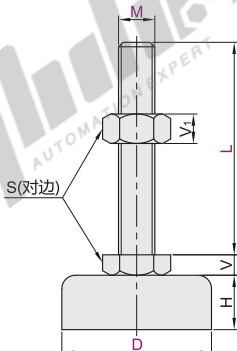


防震脚杯

固定调节型・NBR底座型 轻载型

代码	类型	材质		表面处理/颜色	
		螺杆	底座	螺杆	底座
WAC16	NBR底座型	S45C	NBR	镀锌	黑色



视角标准：第一视角

型号		M	L	螺距	S	H	V	V1	承载(Kg)	参考重量 (Kg/pcs)
代码	D									
WAC16	33	8	30	1.25	13	12	6	6.5	59	0.04
			50							0.05
		10	30	1.5	17	15	7	8	88	0.06
			50							0.07
	40	10	75	1.75	19	15	8	10		0.08
			30							0.09
		12	50							0.10
			75							0.11
	40	12	50	1.75	19	15	8	10		0.12
			75							0.13
		12	100							0.14
			100							0.14



请按图示订货

型号			
代码	D	M	L
WAC16	40	12	50
			75

WAC16—D40—M12—L50

可选加工

型号				
代码	D	M	L	可选加工代码
WAC16	40	12	50	WS WL BS
			75	

WAC16—D40—M12—L50—WS



未税价(元)

优惠价

数量	1~9	10~
价格	100%	另行报价



交货期
1



可选加工

代码

技术说明

WS

螺杆末端加工外四角

选型方法

WS

M	n	e
10	6	
12	8	10
14		
16	10	12
20	12	13.5
24	14	15
30	18	22

WL

螺杆末端加工外六角

选型方法

WL

M	n1	e1
10	6	
12	8	
14	9	10
16	10	
20	13	14
24	16	18
30	20	21



BS

螺杆末端加工扳手槽

选型方法

BS

M	n2	ee	e2
10	8	8	
12	10		
14	12		12
16	13	10	
20	17		
24	20		18
30	26	15	

代码	技术说明																									
NS	螺杆末端加工内四角 	选型方法 NS <table> <tr> <th>M</th><th>n3</th><th>e3</th></tr> <tr> <td>10</td><td>5</td><td></td></tr> <tr> <td>12</td><td>6</td><td>10</td></tr> <tr> <td>14</td><td></td><td></td></tr> <tr> <td>16</td><td>8</td><td>12</td></tr> <tr> <td>20</td><td></td><td>13.5</td></tr> <tr> <td>24</td><td>10</td><td>15</td></tr> <tr> <td>30</td><td></td><td>20</td></tr> </table>	M	n3	e3	10	5		12	6	10	14			16	8	12	20		13.5	24	10	15	30		20
M	n3	e3																								
10	5																									
12	6	10																								
14																										
16	8	12																								
20		13.5																								
24	10	15																								
30		20																								
NL	螺杆末端加工内六角 	选型方法 NL <table> <tr> <th>M</th><th>n4</th><th>e4</th></tr> <tr> <td>10</td><td>4</td><td>5</td></tr> <tr> <td>12</td><td>6</td><td></td></tr> <tr> <td>14</td><td></td><td>8</td></tr> <tr> <td>16</td><td>8</td><td>10</td></tr> <tr> <td>20</td><td>10</td><td>12</td></tr> <tr> <td>24</td><td>12</td><td>15</td></tr> <tr> <td>30</td><td>16</td><td>18</td></tr> </table>	M	n4	e4	10	4	5	12	6		14		8	16	8	10	20	10	12	24	12	15	30	16	18
M	n4	e4																								
10	4	5																								
12	6																									
14		8																								
16	8	10																								
20	10	12																								
24	12	15																								
30	16	18																								

- ① 请根据脚杯螺杆尺寸M进行加工参数的选择;
- ② 加工部不带镀层, 有防锈漆;
- ③ 工具可根据不同加工类型进行选择, 可选用开口扳手、活动扳手、内四角扳手、内六角扳手等。