


标准型
开口型

侧边安装型导向轴支座

标准型

代码	类型	材质		表面处理	附件
		国标	相当		
GEL01	标准型	45	S45C	发黑	1个内六角紧定螺钉
GEL02				喷细砂无电解镀镍	1个内六角紧定螺钉(不锈钢)

❗ 如对防锈有要求, 请优先选用不锈钢材质或喷细砂无电解镀镍产品。

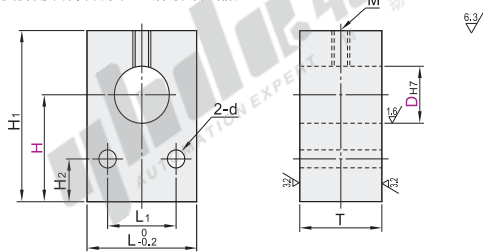

型号			H		L	H ₁	H ₂	T	L ₁	d	M		
代码	D _{H7}												
GEL01 GEL02	8	+0.015 0	25	30	22	H+8.8	5	12	10	4.5	4		
	10		25	30		H+9.8							
	12		25	30		H+10.8							
	13		25	30		H+11.8							
	15	+0.018 0	25	30	40	28			H+14.8			16	
	16		25	30	40								
	18		25	30	40				50	32	H+17.8		18
	20		25	30	40			50					
	25		+0.021 0	30	40			50	38		H+19.8		
	30	30		40	50	60		H+22.8					
	35	+0.025 0		40	50	60		50		H+24.8	32	9	
	40		40	50	60	H+29.8							



型号		H
代码	D _{H7}	
GEL01	8	25 30
GEL02	10	
	12	

GEL02—D8—H25





数量	1~9	10~
价格	100%	另行报价



开口型

代码	类型	材质		表面处理	附件
		国标	相当		
GEP01	开口型	45	S45C	发黑	1个内六角圆柱头螺钉
GEP02				喷细砂无电解镀镍	
GEP06		0Cr18Ni9	SUS304	喷细砂本色阳极氧化	1个内六角圆柱头螺钉(不锈钢)
GEP08		LD31	A6063		

❗ 开口型, 安装孔D的公差H7为开口加工前的公差, 开口加工后由于有内部应力释放, 公差有可能增至H8左右, 不影响客户使用。

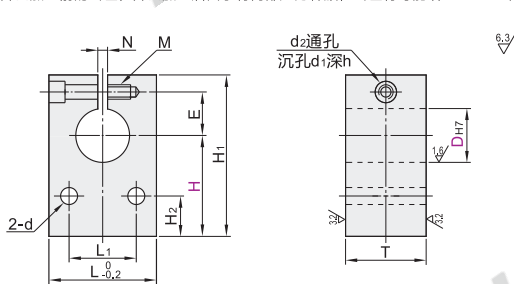

❗ 如对防锈有要求, 请优先选用不锈钢材质、铝合金材质或喷细砂无电解镀镍产品。



型号		H		L	H ₁	H ₂	T	L ₁	E	d	M	d ₂	d ₁	h	N
代码	D _{H7}														
GEP01 GEP02 GEP06 GEP08	8	20 25 30		22	H+15.8	5	12	10	11		M4深8	4.5	8	4.7	1.2~2.3
	10	20 25 30			H+17.8										
	12	20 25 30			H+19.8										
	13	20 25 30													
	15	25 30 40		28	H+25.8	7	16	18	18	6.6	M6深12	6.6	11	6.7	
	16	25 30 40			H+27.8										
	18	25 30 40 50			H+32.8										
	20	25 30 40 50			H+35.8										
	25	30 40 50		38	H+37.8			24	21	9	M8深16	9	14	9.2	1.2~3.5
	30	30 40 50 60													
	35	40 50 60													
	40	40 50 60													



型号		H
代码	D _{H7}	
GEP01	8	20 25 30
GEP02	10	
	12	

GEP02—D8—H25



数量	1~9	10~
价格	100%	另行报价

