


圆皮带用滑轮

U形槽 开口式夹紧固定

代码	类型		材质		表面处理
			国标	相当	
ENS81	开口式夹紧固定	U形槽	45	S45C	发黑
ENS82			铝合金	喷细砂本色阳极氧化	

① 3D模型仅供参考，具体尺寸请以参数表为准，注意选型。

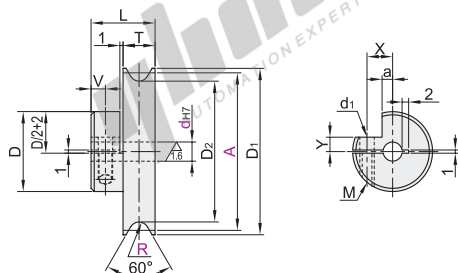

RoHS

① M=M3时, $d_1 = \varnothing 3.3$
M=M4时, $d_1 = \varnothing 4.3$

视图标准：第一视角

型号		R	dH7选择	D	D1	D2	L	T	V	X	Y	a	M	适用 皮带直径
代码	A													
ENS81	20	1	4 5	16	22	18	11	5	2.5	7	5	4	M3	2
	30		4 5 6 6.35 8	20	32 28	42 38								
	40		4 5 6 6.35 8	20	32 27	42 37								
	45		4 5 6 6.35 8	20	47 42	62 57								
	60	1.5	4 5 6 6.35 8 10 11 12	25	62 57	77 70	20	4.5	9	6.2	5.2	M4	3	
	23		25 19	42 36										
	28		30 24	47 41										
	30		32 26	50 44										
	40	2	4 5 6 6.35 8	20	42 36	50 44	20	4.5	9	6.2	5.2	M4	4	
	45		4 5 6 6.35 8 10 11 12	25	62 56	82 76								
	48		4 5 6 6.35 8 10 11 12	25	82 76	97 89								
	60		4 5 6 6.35 8 10 11 12	25	97 89	102 94								
	80	2.5	4 5 6 6.35 8	20	30 23	42 35	10	2.5	7	5	4	M3	5	
	28		4 5 6 6.35 8	20	52 45	62 55								
	30		4 5 6 6.35 8	20	62 55	77 70								
	40		4 5 6 6.35 8	20	82 75	97 89								
	48	3	4 5 6 6.35 8	20	50 42	60 52	20	4.5	9	6.2	5.2	M4	6	
	50		4 5 6 6.35 8	20	62 54	77 69								
	58		4 5 6 6.35 8 10 11 12	25	97 89	102 94								
	60		4 5 6 6.35 8 10 11 12	25	102 94									
75	3	4 5 6 6.35 8	20	30 22	40 32	16	2.5	7	5	4	M3	6		
38		4 5 6 6.35	20	52 44	60 52									
48		4 5 6 6.35	20	62 54	77 69									
50		4 5 6 6.35	20	77 69	97 89									
58	3	4 5 6 6.35 8	20	50 42	60 52	20	4.5	9	6.2	5.2	M4	6		
60		4 5 6 6.35 8 10 11 12	25	62 54	77 69									
75		4 5 6 6.35 8 10 11 12	25	97 89	102 94									
95		4 5 6 6.35 8 10 11 12	25	102 94										
100	3	4 5 6 6.35 8	20	30 22	40 32	16	2.5	7	5	4	M3	6		
28		4 5 6 6.35 8	20	52 44	60 52									
38		4 5 6 6.35	20	62 54	77 69									
48		4 5 6 6.35	20	77 69	97 89									

滑
惰
轮
轮

F8



型号		R	dH7选择
代码	A		
ENS81	20	1	4 5 6 6.35 8
ENS82	30		

ENS81—A20—R1—d5



● 优惠价	
数量	1~9 10~
价格	100% 另行报价



交货期	7
-----	---