

方形丝杠支座组件

支撑侧

低肩型 精密型

代码	类型	材质	表面处理
LEB31		①	① ③
LED31	精密型	支撑侧	S45C
LEG31			发黑
			无电解镀镍
			镀铬

构成零件




编号	零件名称	数量
①	轴承座本体	1
②	径向轴承 6级	1
③	C型挡圈	1




- ① 轴承已经封入适量锂皂基抗极压润滑脂。
- ② 轴承为双铁盖。
- ③ 使用JIS 6级的径向轴承、最适用于高精度、高速旋转用途。

d6

d3~4
d8~25

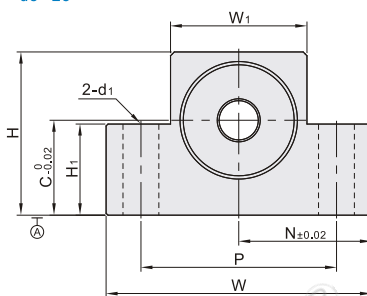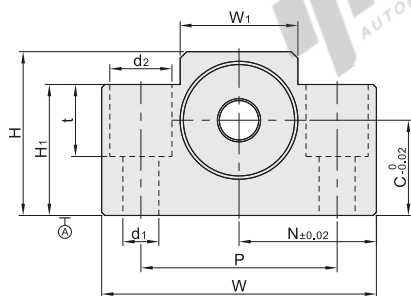

建议轴端加工尺寸

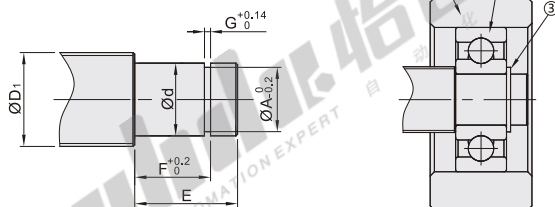

型号		Ød	T	W	H	C	W ₁	H ₁	P	Ød ₁	Ød ₂	t	N	建议轴端加工尺寸						使用C型挡圈	
代码	规格													搭配丝杠外径	轴端部外径	挡圈沟槽尺寸				LEB31	LED31/LEG31
														ØD ₁	Ød	ØA	E	F	G		
发黑 LEB31 无电解镀镍 LED31 镀铬 LEG31	4*	3	10	34	19	10	18	7	26	4.5	—	—	17	4	3 ^{-0.002 -0.010}	2.7	7	4.35	0.5	TBP01-3	TBP03-3
	5*	4		36	21	11	20	8	28				18	5	4 ^{-0.002 -0.010}	3.7	8	5.35		TBP01-4	TBP03-4
	6	6	12	42	25	13	18	20	30	5.5	9.5	11	21	8	6 ^{-0.005 -0.012}	5.7	9	6.8	0.8	TBP01-6	TBP03-6
	8		14	52	32	17	25	26	38	6.6	11	12	26	10						TBP01-6	TBP03-6
	1022*	8		40	22	36	21	52	9				35	12/14/15	8 ^{-0.005 -0.012}	7.6	10	7.9	0.9	TBP01-8	TBP03-8
	10			43	25		24														
	1223*	10		41	23	24	22	14/15/16	10 ^{-0.005 -0.012}	9.6	11	9.15		TBP01-10	TBP03-10						
	12			43	25		24														
	镀铬 LEG31	1526*	20		46	26	41	21	60	11	—	—	40	18/20	15 ^{-0.005 -0.014}	14.3	13	10.15	1.15		
		1528*			48	28		23													
		15	15	80	49	30	25	75	11	47.5	25/28/30	20 ^{-0.005 -0.014}	19	19	15.35	1.35	TBP01-15	TBP03-15			
		15B																			
		20	20	26	95	58	56	30	85	52.5	32/36	25 ^{-0.005 -0.014}	23.9	20	16.35		TBP01-20	TBP03-20			
20B																					
25	25	30	105	68	35	66	25	85					52.5	32/36	25 ^{-0.005 -0.014}	23.9	20	16.35		TBP01-25	TBP03-25

① 带 * 规格无镀镍、镀铬产品。



型号	代码	规格	Ød	T
LEB31	LEB31	6	6	12
LED31	LED31	8	6	14

LEB31 — 6



优惠价	数量	1~4	5~
价格	100%	另行报价	



① LEG31



① 其余