

# 圆弧齿同步带

# S2M/S3M/S5M/S8M型 标准型

同步带

F2


代码	类型	齿距	材质		颜色	使用温度
			主体	芯线		
ECE21	S2M	2.0	氯丁橡胶	玻璃纤维线	黑色	-30~90°C
	S3M	3.0				
	S5M	5.0				
	S8M	8.0				

### ◎ 皮带宽度公差

皮带宽度(mm)	公差
3~30	±0.5
31~50	±0.8
51~100	±1.0



- ① 为减少橡胶屑飞散，橡胶同步带部分齿形齿面布为茶棕色，对强度及使用性能无影响；
- ② 橡胶同步带芯线采用螺旋缠绕的方式排布，分切后会看到芯线层，不影响使用；
- ③ 表格中所有代码的皮带周长为芯线长度；
- ④ 重量为理论值，与实物可能存在差异，仅供参考。

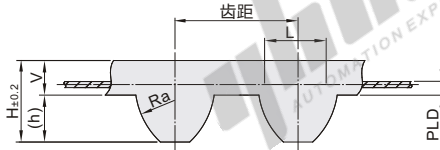

代码	齿形	齿距	L	h	H	V	Ra	PLD	单位重量(g/10mm*1m)
ECE21	S2M	2	1.3	0.76	1.31	0.55	1.3	0.254	0.013
	S3M	3	1.95	1.14	2.1	0.96	1.95	0.381	0.019
	S5M	5	3.25	1.91	3.61	1.7	3.25	0.480	0.034
	S8M	8	5.2	3.05	5	1.95	5.2	0.686	0.052

视角标准：第一视角

### ◎ ECE21-S2M(齿距: 2)

型号	代码	皮带公称宽度	齿数
ECE21-S2M	76	38	76
	78	39	78
	80	40	80
	86	43	86
	88	44	88
	90	45	90
	92	46	92
	94	47	94
	98	49	98
	100	50	100
	102	51	102
	104	52	104
	106	53	106
	108	54	108
	110	55	110
	112	56	112
	114	57	114
	116	58	116
	118	59	118
	120	60	120
122	61	122	
124	62	124	
126	63	126	
128	64	128	
130	65	130	
132	66	132	
134	67	134	
136	68	136	
138	69	138	
140	70	140	
142	71	142	
144	72	144	
146	73	146	
148	74	148	
150	75	150	
152	76	152	
156	78	156	
158	79	158	
160	80	160	
162	81	162	
164	82	164	
166	83	166	
168	84	168	
170	85	170	
172	86	172	
174	87	174	
176	88	176	
178	89	178	
180	90	180	
182	91	182	
184	92	184	
186	93	186	
188	94	188	
190	95	190	
192	96	192	
194	97	194	
196	98	196	
198	99	198	
200	100	200	
202	101	202	
204	102	204	
206	103	206	
208	104	208	
210	105	210	
212	106	212	
214	107	214	
216	108	216	
218	109	218	
220	110	220	
222	111	222	
224	112	224	
226	113	226	
230	115	230	
232	116	232	
234	117	234	
236	118	236	
238	119	238	
240	120	240	
242	121	242	
244	122	244	
248	124	248	
250	125	250	
252	126	252	

### ◎ ECE21-S2M(齿距: 2)

型号	代码	皮带公称宽度	齿数
ECE21-S2M	254	127	254
	256	128	256
	258	129	258
	260	130	260
	262	131	262
	264	132	264
	266	133	266
	268	134	268
	270	135	270
	272	136	272
	274	137	274
	276	138	276
	278	139	278
	280	140	280
	282	141	282
	284	142	284
	286	143	286
	288	144	288
	290	145	290
	292	146	292
294	147	294	
296	148	296	
300	150	300	
302	151	302	
304	152	304	
306	153	306	
308	154	308	
310	155	310	
312	156	312	
314	157	314	
316	158	316	
318	159	318	
320	160	320	
322	161	322	
324	162	324	
326	163	326	
328	164	328	
330	165	330	
332	166	332	
334	167	334	
336	168	336	
338	169	338	
340	170	340	
342	171	342	
344	172	344	
350	175	350	
354	177	354	
360	180	360	
364	182	364	
370	185	370	
372	186	372	
374	187	374	
376	188	376	
380	190	380	
386	193	386	
390	195	390	
396	198	396	
400	200	400	
406	203	406	
408	204	408	
410	205	410	
416	208	416	
420	210	420	
426	213	426	
428	214	428	
434	217	434	
436	218	436	
438	219	438	
440	220	440	
448	224	448	
452	226	452	
454	227	454	
456	228	456	
460	230	460	
468	234	468	
474	237	474	
480	240	480	
486	243	486	
490	245	490	
494	247	494	
500	250	500	
506	253	506	
520	260	520	

### ◎ ECE21-S2M(齿距: 2)

型号	代码	皮带公称宽度	齿数
ECE21-S2M	524	262	524
	530	265	530
	532	266	532
	540	270	540
	550	275	550
	558	279	558
	560	280	560
	572	286	572
	580	290	580
	594	297	594
	596	298	596
	600	300	600
	604	302	604
	606	303	606
	620	310	620
	630	315	630
	632	316	632
	650	325	650
	652	326	652
	654	327	654
656	328	656	
660	330	660	
668	334	668	
676	338	676	
692	346	692	
700	350	700	
710	355	710	
726	363	726	
742	371	742	
752	376	752	
766	383	766	
796	398	796	
800	400	800	
810	405	810	
826	413	826	
828	414	828	
848	424	848	
856	428	856	
864	432	864	
898	449	898	
900	450	900	
940	470	940	
946	473	946	
950	475	950	
984	492	984	
1000	500	1000	
1020	510	1020	
1024	512	1024	
1032	516	1032	
1036	518	1036	
1042	521	1042	
1064	532	1064	
1066	533	1066	
1074	537	1074	
1086	543	1086	
1094	547	1094	
1100	550	1100	
1110	555	1110	
1136	568	1136	
1154	577	1154	
1166	583	1166	
1196	598	1196	
1200	600	1200	
1224	612	1224	
1228	614	1228	
1250	625	1250	
1274	637	1274	
1290	645	1290	

### ◎ ECE21-S3M(齿距: 3)

型号	代码	皮带公称宽度	齿数
ECE21-S3M	93	31	93
	99	33	99
	108	36	108
	120	40	120
	123	41	123
	129	43	129
	132	44	132
	141	47	141
	144	48	144
	147	49	147
	150	50	150
	156	52	156
	159	53	159
	162	54	162
	168	56	168
	171	57	171
	174	58	174
	177	59	177
	180	60	180
	183	61	183
186	62	186	
189	63	189	
192	64	192	
195	65	195	
198	66	198	
201	67	201	
204	68	204	
207	69	207	
210	70	210	
213	71	213	
219	73	219	
222	74	222	
225	75	225	
228	76	228	
234	78	234	
237	79	237	
240	80	240	
243	81	243	
246	82	246	
249	83	249	
252	84	252	
255	85	255	
258	86	258	
261	87	261	
264	88	264	
267	89	267	
270	90	270	
273	91	273	
276	92	276	
279	93	279	
282	94	282	
285	95	285	
288	96	288	
291	97	291	
294	98	294	
297	99	297	
300	100	300	
303	101	303	
306	102	306	
309	103	309	
312	104	312	
315	105	315	
318	106	318	
324	108	324	
327	109	327	
330	110	330	
333	111	333	
336	112	336	
339	113	339	
342	114	342	
348	116	348	
351	117	351	
354	118	354	
360	120	360	
363	121	363	
366	122	366	
369	123	369	
372	124	372	
375	125	375	
378	126	378	
384	128	384	
387	129	387	
390	130	390	
396	132	396	

### ◎ ECE21-S3M(齿距: 3)

型号	代码	皮带公称宽度	齿数
ECE21-S3M	399	133	399
	402	134	402
	405	135	405
	408	136	408
	414	138	414
	417	139	417
	420	140	420
	423	141	423
	426	142	426
	432	144	432
	438	146	438
	444	148	444
	447	149	447
	453	151	453
	456	152	456
	459	153	459
	468	156	468
	471	157	471
	474	158	474
	480	160	480
483	161	483	
486	162	486	
489	163	489	
492	164	492	
498	166	498	
501	167	501	
504	168	504	
507	169	507	
513	171	513	
516	172	516	

同步带

F2

同步带

F2

☑ ECE21-S3M(齿距: 3)

型号	皮带公称宽度	皮带周长	齿数
1050		350	
1080		360	
1119		373	
1134		378	
1146		382	
1170		390	
1176		392	
1188		396	
1203		401	
1221		407	
1236		412	
1245		415	
1260		420	
1290		430	
1299		433	
1332		444	
1401		467	
1419		473	
1530		510	
1587		529	
1596		532	
1680		560	
1788		596	

☑ ECE21-S5M(齿距: 5)

型号	皮带公称宽度	皮带周长	齿数
225		45	
230		46	
255		51	
260		52	
275		55	
295		59	
300		60	
305		61	
320		64	
325		65	
340		68	
350		70	
360		72	
370		74	
375		75	
380		76	
390		78	
400		80	
410		82	
415		83	
420		84	
425		85	
435		87	
440		88	
445		89	
450		90	
475		95	
490		98	
500		100	
520		104	
525		105	
530		106	
545		109	
550		110	
560		112	
565		113	
570		114	
575		115	
590		118	
595		119	
600		120	
625		125	
635		127	
640		128	
645		129	
650		130	
665		133	
670		134	
675		135	
690		138	
695		139	
700		140	
710		142	
720		144	
725		145	
730		146	
740		148	
750		150	
765		153	

☑ ECE21-S5M(齿距: 5)

型号	皮带公称宽度	皮带周长	齿数
770		154	
775		155	
780		156	
800		160	
810		162	
830		166	
845		169	
850		170	
860		172	
870		174	
890		178	
900		180	
920		184	
930		186	
940		188	
950		190	
965		193	
975		195	
1000		200	
1025		205	
1050		210	
1055		211	
1085		217	
1090		218	
1100		220	
1105		221	
1115		223	
1120		224	
1125		225	
1135		227	
1145		229	
1160		232	
1165		233	
1195		239	
1225		245	
1250		250	
1260		252	
1270		254	
1295		259	
1350		270	
1420		284	
1475		295	
1500		300	
1505		301	
1530		306	
1595		319	
1605		321	
1680		336	
1715		343	
1800		360	
2000		400	

☑ ECE21-S8M(齿距: 8)

型号	皮带公称宽度	皮带周长	齿数
352		44	
384		48	
408		51	
424		53	
440		55	
456		57	
480		60	
512		64	
520		65	
528		66	
560		70	
584		73	
600		75	
632		79	
640		80	
656		82	
672		84	
680		85	
712		89	
720		90	
728		91	
760		95	
800		100	
824		103	
840		105	
848		106	
880		110	
888		111	
896		112	
920		115	
944		118	
960		120	
976		122	
984		123	
1000		125	
1032		129	
1040		130	
1056		132	
1080		135	
1096		137	
1120		140	
1136		142	
1152		144	
1160		145	
1184		148	
1192		149	
1200		150	
1216		152	

☑ ECE21-S8M(齿距: 8)

型号	皮带公称宽度	皮带周长	齿数
1224		153	
1240		155	
1248		156	
1272		159	
1280		160	
1296		162	
1304		163	
1312		164	
1344		168	
1352		169	
1360		170	
1384		173	
1392		174	
1400		175	
1424		178	
1440		180	
1480		185	
1520		190	
1562		194	
1600		200	
1680		210	
1728		216	
1760		220	
1776		222	
1800		225	
1808		226	
1880		235	
1912		239	
1952		244	
2000		250	
2120		265	
2160		270	
2240		280	
2304		288	
2400		300	
2496		312	
2560		320	
2600		325	
2800		350	
2880		360	
2944		368	
3200		400	
3600		450	
3720		465	
3904		488	
4400		550	

☑ ECE21-S5M(齿距: 5)

型号	皮带公称宽度	皮带周长
ECE21-S5M	100	225
	150	230

ECE21-S5M-150-225



请按图示订货



未税价(元)

● 优惠价

数量	1~4	5~
价格	100%	另行报价



交货期

4