

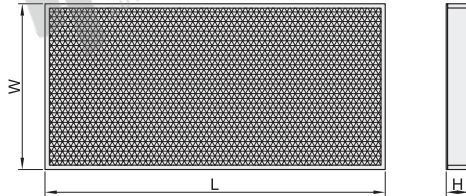


过滤器

代码	类型
ZHJ14	过滤器

特点

- 容尘量大，低阻力，过滤效率高；
- 密封性好，结构紧凑，安装方便。



视角标准：第一视角

代码	型号 滤网类型	规格	过滤等级 (≥0.3μm颗粒)	L×W×H (mm)	初始阻力 (pa)	最终阻力 (pa)	常规风量 (CFM)	使用环境	
ZHJ14	A (耐高温过滤器)	3203	H13(99.99%)	320×320×220	25~120	200~450	650	工作温度 200~250°C	
		4844	H14(99.995%)						
		4844	H13(99.99%)						
		4844	H14(99.995%)						
		6306	H13(99.99%)	630×630×220					
		9456	H13(99.99%)	945×630×220					
	B (耐高温折叠式过滤器)	4939			495×395×96			500	工作温度 >200°C
		5922			592×287×21			2350	
		5924			592×287×46			750	
		5939			595×395×96			1000	
		5942	G4(90.00%)		592×490×21	25~120	200~450	2200	
		5944			592×490×46			1300	
		5944			592×490×46			1800	
		5952			592×592×21			1600	
		5954			592×592×46			2150	
	5959			592×592×96			2600		
	C (折叠式过滤器)	5922			592×287×21			750	工作温度 ≤50°C
		5924			592×287×46			400	
5942		G3(80.00%)		592×490×21	60~200	300~400	1300		
5944				592×490×46			650		
		5952		592×592×21			1550	工作湿度 100%	



请按图示订货

型号		规格	过滤等级 (≥0.3μm颗粒)
代码	滤网类型		
ZHJ14	A (耐高温过滤器)	4844	H13(99.99%)
			H14(99.995%)

ZHJ14 - A - 4844 - H13

