



代码	材质	硬度(邵氏)	颜色	使用温度范围	用途
XTC01	丁腈橡胶	HA70±5	黑色	-20~100℃	耐矿物油用
XTC02		HA90±5		-15~100℃	
XTC11	硅橡胶	HA50±5	半透明色	-40~200℃	耐高温用
XTC12		HA70±5	红褐色		
XTC21	氟橡胶	HA90±5		-10~200℃	
XTC22		HA90±5			
XTC31	乙丙橡胶		黑色	-40~120℃	
XTC51	防静电丁腈橡胶	HA70±5		-20~100℃	防静电用
XTC52	防静电硅橡胶			-40~200℃	(防静电值10 ⁹ ~10 ¹⁰ Ω)
XTC53	防静电氟橡胶				
XTC41	氟树脂	—	白色	-10~200℃	耐高压用



XTC01/02/11/12/21/22/31
XTC51/52/53

XTC41

① 截面放大图

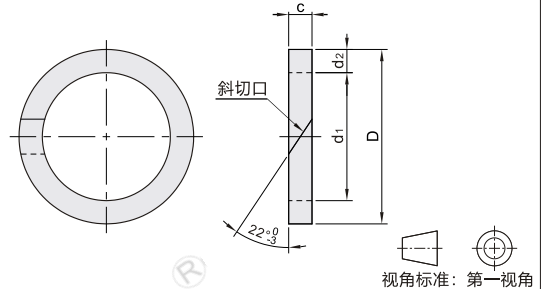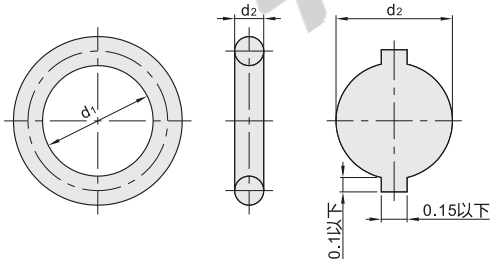

视角标准：第一视角

■ P系列O型圈 (JIS B 2401)

型号	公称 编号	d2	尺寸	d1	配合尺寸
代码	规格				d1 D
3	P3		2.8		3 6
4	P4		3.8	±0.13	4 7
5	P5		4.8	±0.14	5 8
6	P6	1.9±0.07	5.8	±0.21	6 9
7	P7		6.8	±0.15	7 10
8	P8		7.8	±0.23	8 11
9	P9		8.8	±0.18	9 12
10	P10		9.8	±0.16	10 13
10A	P10A			±0.24	10 14
11	P11		10.8	±0.17	11 15
11.2	P11.2		11.0	±0.26	11 15.2
12	P12		11.8	±0.20	12 16
12.5	P12.5		12.3	±0.18	12.5 16.5
14	P14	2.4±0.08	13.8	±0.27	14 18
15	P15		14.8	±0.21	15 19
16	P16		15.8	±0.29	16 20
18	P18		17.8	±0.23	18 22
20	P20		19.8	±0.30	20 24
21	P21		20.8	±0.25	21 25
22	P22		21.8	±0.33	22 26
XTC01					
XTC02					
XTC11					
XTC12					
XTC21					
XTC22					
XTC31					
XTC51					
XTC52					
XTC53					
22A	P22A		21.7	±0.23	22 28
22.4	P22.4		22.1	±0.35	22.4 28.4
24	P24		23.7	±0.27	24 30
25	P25		24.7	±0.33	25 31
25.5	P25.5		25.2	±0.24	25.5 31.5
26	P26		25.7	±0.36	26 32
28	P28		27.7	±0.25	28 34
29	P29		28.7	±0.41	29 35
29.5	P29.5		29.2	±0.32	29.5 35.5
30	P30		29.7	±0.43	30 36
31	P31		30.7	±0.28	31 37
31.5	P31.5		31.2	±0.44	31.5 37.5
32	P32		31.7	±0.30	32 38
34	P34	3.5±0.09	33.7	±0.45	34 40
35	P35		34.7	±0.38	35 41
35.5	P35.5		35.2	±0.48	35.5 41.5
36	P36		35.7	±0.39	36 42
38	P38		37.7	±0.50	38 44
39	P39		38.7	±0.36	39 45
40	P40		39.7	±0.54	40 46
41	P41		40.7	±0.43	41 47
42	P42		41.7	±0.56	42 48
44	P44		43.7	±0.57	44 50
45	P45		44.7	±0.40	45 51
46	P46		45.7	±0.60	46 52
48	P48		47.7	±0.41	48 54
50	P50		49.7	±0.62	50 56

■ P系列O型圈 (JIS B 2401)

型号	公称 编号	d2	尺寸	d1	配合尺寸
代码	规格				d1 D
50A	P50A		49.7	±0.44	50 60
52	P52		51.6	±0.66	52 62
53	P53		52.6	±0.69	53 63
55	P55		54.6	±0.47	55 65
56	P56		55.6	±0.71	56 66
XTC01					
XTC02					
XTC11					
XTC12					
XTC21					
XTC22					
XTC31					
XTC51					
XTC52					
XTC53					
58	P58		57.6	±0.51	58 68
60	P60		59.6	±0.72	60 70
62	P62	5.7±0.12	61.6	±0.52	62 72
63	P63		62.6	±0.61	63 73
65	P65		64.6	±0.56	65 75
67	P67		66.6	±0.83	67 77
70	P70		69.6	±0.67	70 80
71	P71		70.6	±0.90	71 81
75	P75		74.6	±0.61	75 85
80	P80		79.6	±0.96	80 90

■ P系列O型圈·斜切 (JIS B 2407)

型号	公称 编号	d2	尺寸	d1	D	c
代码	规格					
15	P15		15		19	
16	P16		16		20	
18	P18		18	±0.15	22	
20	P20	2.0	20		24	±0.15
21	P21		21		25	
22	P22		22		26	
22A	P22A				28	
24	P24		24		30	
25	P25		25		31	
26	P26		26	±0.03	32	
28	P28		28	±0.05	34	
30	P30		30		36	
32	P32	3.0	32	±0.20	38	±0.20
34	P34		34		40	
38	P38		38		44	
40	P40		40		46	
42	P42		42		48	
48	P48		48		54	
50	P50		50		56	

■ JIS B 2401

型号	代码	规格	公称编号
XTC01	30	P30	
XTC02	32	P32	

请按图示订货

XTC01~32



● 优惠价

数量	1~9	10~
价格	100%	另行报价

未标价(元)



交货期

5