


精密型 橡皮管用快拧接头

- ◀ 直接头/弯接头
- ◀ T型接头
- 外螺纹


直接头/弯接头

代码	类型	材质
J-XYS01	外螺纹 直接头	SUS316
J-XYS21	外螺纹 弯接头	SUS316

直接头
J-XYS01

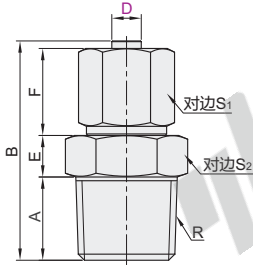

弯接头
J-XYS21



视角标准：第一视角

直接头


代码	型号 管外径D	公称型号	接管内径	R	A	B	E	F	S1	S2
J-XYS01	4	1	2.5	R1/8	8	25.2	5.5	11	10	11
		2		R1/4	11	28	5			14
	6	1	4	R1/8	8	26	5.5	11.5	11	11
		2		R1/4	11	29				14
	8	1	6	R1/8	8	27.5	5.5	12.5	13	13
		2		R1/4	11	30.5				14
		3		R3/8	11	31.5				17
	10	1	8	R1/8	8	28.5	6	13.8	15	15
		2		R1/4	11	31.5				17
		3		R3/8	11	36				22
		4		R1/2	15	36				27
	12	2	10	R1/4	11	31.5	5.5	14	17	17
3		R3/8		11	36	22				
4		R1/2		15	36	27				

弯接头

代码	型号 管外径D	公称型号	接管内径	R	A	E	F	S1	S2	L1	L2
J-XYS21	6	1	4	R1/8	8	8.1	11.5	11	9	21.5	16.5
		2		R1/4	11						19.4
	8	1	6	R1/8	8	9.6	12.5	13	11	24	18
		2		R1/4	11						22
		3		R3/8	11						26
	10	2	8	R1/4	11	11.6	13.8	15	13	27	23.5
		3		R3/8	11						28.2
		4		R1/2	15						29.1
		2		R1/4	11						24.5
	12	3	10	R3/8	11	14.2	14	17	16	29	24.7
		4		R1/2	15						29.1

T型接头

代码	类型	材质
J-XYS41	外螺纹 T型接头	SUS316

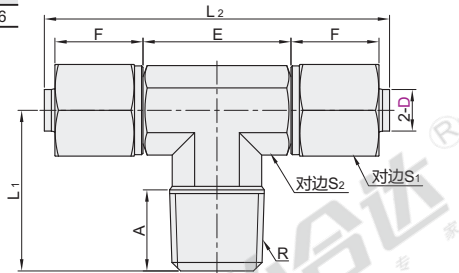

视角标准：第一视角

型号 代码	管外径D	公称型号	接管内径	R	A	E	F	S1	S2	L1	L2	
J-XYS41	6	1	4	R1/8	8	18.6	11.5	11	9	16.9	43.6	
		2		R1/4	11							19.2
	8	1	5	R1/8	8	21	12.5	13	11	18.7	49	
		2		R1/4	11							22.8
		3		R3/8	11							23.5
	10	2	8	R1/4	11	23	13.8	15	13	24	53	
3		R3/8		11	23.7							
3		R1/4		11	24.6							
12	2	10	R1/4	11	27	14	17	16	23.7	57		
	3		R3/8	11							24.6	



型号	管外径D	公称型号	适用软管内径
J-XYS41	6	2	4

J-XYS41-D6-1



● 优惠价
数量 1~29 30~
价格 100% 另行报价



9