


内六角沉头螺钉

代码	类型	螺纹	材质		硬度	表面处理	强度等级
			国标	相当			
TAU01	内六角沉头螺钉	粗牙	35CrMo	SCM435	32~39HRC	发黑	10.9
TAU08			—	10B21	37~42HRC	镀锌	—
TAU02			0Cr18Ni9	SUS304	—	—	A2-50
TAU05			0Cr17Ni12Mo2	SUS316	—	—	A4-50
TAU09			—	黄铜	—	—	—

TAU01



TAU02/05

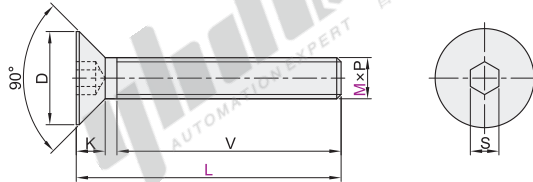

① 适用标准: DIN 7991-1986



SCM435

型号		L																V	P	D	D	K	S				
代码	M																		螺距	(min)	(max)	(max)					
TAU01	2	3	4	5	6	8	10	12	14	16	20											全牙	0.4	3.7	4	1.3	1.3
	3	6			8	10	12	16			20	25	30	35	40	45	50	0.5	5.7	6	1.7		2				
	4	6			8	10	12	16			20	25	30	35	40	45	50	0.7	7.64	8	2.3		2.5				
	5	6			8	10	12	14	16			20	25	30	35	40	45	50	0.8	9.64	10		2.8	3			
	6	6			8	10	12	16			20	25	30	35	40	45	50	55	60	1	11.57		12	3.3	4		
	8	10			12	16			20	25	30	35	40	45	50	55	60	65	70	75	80		85	90	100		
	10	16			20	25	30	35	40	45	50	55	60	65	70	75	80	90	100	1.25	15.57		16	4.4	5		
	12	20			25	30	35	40	45	50	55	60	65	70	75	80	90	100	1.5	19.48	20		5.5	6			
	16	30			35	40	45	50	55	60	65	70	75	80	90	100			1.75	23.48	24		6.5	8			
	20	40			45	50	55	60	65	70	75	80	90	100					2	29.48	30		7.5	10			
		40 45 50 55 60 65 70 75 80 90 100																				2.5	35.38	36	8.5	12	

10B21

型号		L															V	P	D	D	K	S			
代码	M																	螺距	(min)	(max)	(max)				
(镀锌) TAU08	2	3	4	5	6	8	10	16									0.4	3.7	4	1.3	1.3				
	2.5	5					6	8	10	16							20	0.45	4.7	5	1.5	1.5			
	3	5			6	8	10	12	16			20	25	30	35	40	45	0.5	5.7	6	1.7	2			
	4	6			8	10	12	16			20	25	30	35	40	45	50	0.7	7.64	8	2.3	2.5			
	5	6			8	10	12	14	16	20	25	30	35	40	45	50	0.8	9.64	10	2.8	3				
	6	8			10	12	14	16	20	25	30	35	40	45	50	55	60	1	11.57	12	3.3	4			
	8	10			12	14	16	20	25	30	35	40	45	50	55	60	65	70	80	100	1.25	15.57	16	4.4	5
	10	16			20	25	30	35	40	45	50	55	60	65	70	80	90	100	1.5	19.48	20	5.5	6		
	12	20			25	30	35	40	45	50	55	60	65	70	75	80	90	100	1.75	23.48	24	6.5	8		
16	25			30	35	40	45	50	55	60	65	70	75	80	90	100	2	29.48	30	7.5	10				

SUS304

型号		L										V	P	D	D	K	S
代码	M												螺距	(min)	(max)	(max)	
TAU02	2	5 6 8 10 12		16						全牙	0.4	3.7	4	1.3	1.32		
	2.5	5 6 8 10									0.45	4.7	5	1.5	1.5		
	3	6 8 10 12		16		20 25 30 35					0.5	5.7	6	1.7	2		
	4	6 8 10 12		16 18		20 25 30 35					0.7	7.64	8	2.3	2.5		
	5	8 10 12 14		16		20 25 30 35 40					0.8	9.64	10	2.8	3		
	6	8 10 12 14		16		20 25 30 35 40 45					1	11.57	12	3.3	4		
	8	10 12		15 16		20 25 30 35 40 45 50 60					1.25	15.57	16	4.4	5		
	10			16		20 25 30 35 40 45 50 55 60 65 70					1.5	19.48	20	5.5	6		


SUS316

型号		L										V	P 螺距	D (min)	D (max)	K (max)	S
代码	M																
TAU05	2.5	10 12										0.45	4.7	5	1.5	1.5	
	3	6 8 10 12	16 20 25 30									0.5	5.7	6	1.7	2	
	4	6 8 10 12	16 20 25 30 35									0.7	7.64	8	2.3	2.5	
	5	8 10 12 14	16 20 25 30 35 40								全牙	0.8	9.64	10	2.8	3	
	6	10 12 14	16 20 25 30 35 40 45									1	11.57	12	3.3	4	
	8	16 20 25 30 35 40 45 50											1.25	15.57	16	4.4	5
	10	16 20 25 30 35 40 45 50											1.5	19.48	20	5.5	6

黄铜

型号		L									V	P	D	D	K	
代码	M											螺距	(min)	(max)	(max)	S
TAU09	6	12	16	20	25	30					1	11.57	12	3.3	4	
	8	20 25 30 35 40									1.25	15.57	16	5.5	5	
	10	20 25 30 35 40 45									1.5	19.48	20	4.4	6	

EX Example 使用示例



请按图示订货

型号	L									
代码	M									
(TAU01)	3	6 8 10 12 16								
	4	6 8 10 12 16								
	5	6 8 10 12 14 16								

TAU01 — M4 — L16



未税价(元)

优惠价

数量	1~49	50~
价格	100% 另行报价	



交货期

3

- ① 内六角沉头螺钉大多用在需要安装后, 零件的表面不能有凸起的地方;
- ② 常用于机械上, 主要有便于紧固, 拆卸, 不容易滑角等优势。