

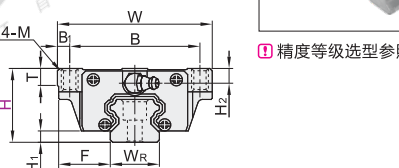
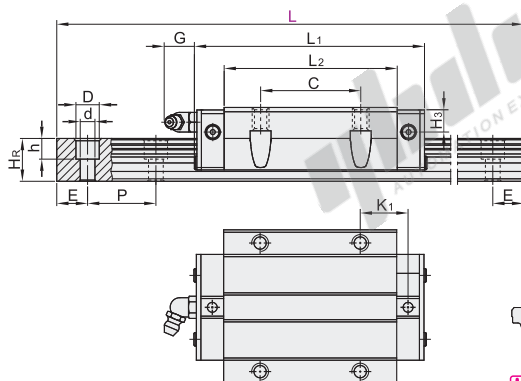


经济型高组装高型直线导轨

重载型·滑块法兰型·可互换

普通级 轻预压(ZA)0.05~0.07C

代码	类型	精度等级	滑块固定方式	滑块数量	导轨固定方式	材质	
IBJ21 IBJ23	组件	普通级	上锁式	单滑块 双滑块	上锁式	S55C	20CrMoH



① 静态容许力矩, $M_R/M_P/M_Y$ 的数值请参考下表。



① 精度等级选型参照P1375页。


型号		L	H ₁	F	滑块尺寸											
代码	H				W	B	B ₁	C	L ₁	L ₂	K ₁	G	M	T	H ₂	H ₃
IBJ21 IBJ23	24	100~1480	4.4	16	47	38	4.5	30	60.5	39.5	8.1	5.3	M5	6	4	4
	30	100~1480	4.3	21.5	63	53	5	40	76.7	50.5	10.25		M6	8	6	6
	36	100~1480	5.6	23.5	70	57	6.5	45	84	58	11.5	12	M8			5.5
	42	200~1480	6	31	90	72	9	52	98.4	70	15.5		M10	8.5	7	6
	48	200(300)~2655	7.4	33	100	82	9	62	112.4	80	14.5		M10	10.1	9	8
	60	255(400)~3486	9.5	37.5	120	100	10	80	137.4	97	13.3	13	M12	15.1	11	10
	70	300(500)~3865	13	43.5	140	116	12	95	166.7	117.7	17.35		M14	17.5	12	19

① () 内的L尺寸为双滑块IBJ23的最短滑轨长度。 ② L尺寸的最小值由滑块长度与滑块数量而定。 ③ 每个规格滑轨长度L最大可做到4000mm/条。

滑轨尺寸						基本额定负载(KN)			静态容许力矩(KN·m)			重量	
W _R	H _R	D	h	d	P	固定螺钉	C(动)	Co(静)	M _R	M _P	M _Y	滑块(Kg)	滑轨(Kg/m)
15	15	7.5	5.3	4.5	60	M4×16	10.59	16.19	0.11	0.09	0.09	0.2	1.42
20	17.5	9.5	8.5	6		M5×16	17.2	25.6	0.25	0.18	0.18	0.33	2.2
23	22	11	9	7		M6×20	25.11	36.42	0.41	0.32	0.32	0.53	3.25
28	26	14	12	9	80	M8×25	34.93	49.58	0.58	0.5	0.5	0.9	4.49
34	29	14	12	9		M8×25	48.5	57.6	1.08	0.78	0.78	1.5	6.36
45	38	20	17	14		105	M12×35	75.26	100.2	1.8	1.35	1.35	2.75
53	44	23	20	16	120	M14×45	112.33	145.64	3.59	2.5	2.5	4.2	15.12

④ E(螺钉中心孔至端面距离)=[L-(N-1)×P]/2

H	24	30	36	42	48	60	70	N (安装孔数)
100~131	100~139	100~141	—	—	—	—	—	2
132~191	140~199	142~201	200~263	200~255	255~336	300~385	—	3
192~251	200~259	202~261	264~343	264~335	337~441	386~505	—	4
252~311	260~319	262~321	344~423	346~415	442~546	506~625	—	5
312~371	320~379	322~381	424~503	416~495	547~651	626~745	—	6
372~431	380~439	382~441	504~583	496~575	652~756	746~865	—	7
432~491	440~499	442~501	584~663	576~655	757~861	866~985	—	8
492~551	500~559	502~561	664~743	656~735	862~966	986~1105	—	9
552~611	560~619	562~621	744~823	736~815	967~1071	1106~1225	—	10
612~671	620~679	622~681	824~903	816~895	1072~1176	1226~1345	—	11
672~731	680~739	682~741	904~983	896~975	1177~1281	1346~1465	—	12
732~791	740~799	742~801	984~1063	976~1055	1282~1386	1466~1585	—	13
792~851	800~859	802~861	1064~1143	1056~1135	1387~1491	1586~1705	—	14
852~911	860~919	862~921	1144~1223	1136~1215	1492~1596	1706~1825	—	15
912~971	920~979	922~981	1224~1303	1216~1295	1597~1701	1826~1945	—	16
972~1031	980~1039	982~1041	1304~1383	1296~1375	1702~1806	1946~2065	—	17
1032~1091	1040~1099	1042~1101	1384~1463	1376~1455	1807~1911	2066~2185	—	18
1092~1151	1100~1159	1102~1161	1464~1480	1456~1535	1912~2016	2186~2305	—	19
1152~1211	1160~1219	1162~1221	—	1536~1615	2017~2121	2306~2425	—	20
1212~1271	1220~1279	1222~1281	—	1616~1695	2122~2226	2426~2545	—	21
1272~1331	1280~1339	1282~1341	—	1696~1775	2227~2331	2546~2665	—	22
1332~1391	1340~1399	1342~1401	—	1776~1855	2332~2436	2666~2785	—	23
1392~1451	1400~1459	1402~1461	—	1856~1935	2437~2541	2786~2905	—	24
1452~1480	1460~1480	1462~1480	—	1936~2015	2542~2646	2906~3025	—	25
			—	2016~2095	2647~2751	3026~3145	—	26
			—	2096~2175	2752~2856	3146~3265	—	27
			—	2176~2255	2857~2961	3266~3385	—	28
			—	2256~2335	2962~3066	3386~3505	—	29
			—	2336~2415	3067~3171	3506~3625	—	30
			—	2416~2495	3172~3276	3626~3745	—	31
			—	2496~2575	3277~3381	3746~3865	—	32
			—	2576~2655	3382~3486	—	—	33
P	60			80		105	120	—



⑤ 精度基准

尺寸精度		
单滑块	高度H的容许尺寸误差	±0.1
	宽度F的容许尺寸误差	±0.1
双滑块	高度H的相互误差	0.02
	宽度F的相互误差(基准轨)	0.03
滑块C面对滑轨A面的行走平行度 请参阅行走精度表		
滑块D面对滑轨B面的行走平行度 P1374		



请按照图订货



未税价(元)



交货期

型号	H	L
代码	24	100~1480
IBJ21	30	100~1480
IBJ23	36	100~1480

IBJ21 — H30 — L260

● 优惠价

数量 1~9 10~

价格 100% 另行报价

5